



## **Vehicle Standard (Australian Design Rule 81/02 — Fuel Consumption Labelling for Light Vehicles) 2008 Amendment 6**

I, ANTHONY NORMAN ALBANESE, Minister for Infrastructure and Transport,  
determine this vehicle standard under subsection 7 of the *Motor Vehicle Standards Act  
1989*.

Dated 7 May 2012

ANTHONY NORMAN ALBANESE

Minister for Infrastructure and Transport

---

## CONTENTS

<b>1</b>	<b>LEGISLATIVE PROVISIONS</b>	<b>2</b>
<b>2</b>	<b>AMENDMENT OF VEHICLE STANDARD</b>	<b>2</b>
<b>3</b>	<b>SCHEDULE 1</b>	<b>2</b>

### **1 LEGISLATIVE PROVISIONS**

#### **1.1 NAME OF LEGISLATIVE INSTRUMENT**

1.1.1 This instrument is the *Vehicle Standard (Australian Design Rule 81/02 – Fuel Consumption Labelling for Light Vehicles) 2008 Amendment 6*.

1.1.2 This instrument may also be cited as ADR 81/02 Amendment 6.

#### **1.2 COMMENCEMENT**

1.2.1 This instrument commences the day after it is registered.

### **2 AMENDMENT OF VEHICLE STANDARD**

2.1.1 The changes specified in Schedule 1 amend *Vehicle Standard (Australian Design Rule 81/02 – Fuel Consumption Labelling for Light Vehicles) 2008*.

### **3 SCHEDULE 1**

[1] Amend clause 2.5 to read:

“2.5 To the extent of any inconsistency, the applicability dates specified in clause 2.2. apply in lieu of any dates specified in Appendix B or Appendix C.

[2] Amend clause 4.5 to read:

“4.5 Subject to the requirements of paragraph 5.5 of Appendix B or Appendix C, the manufacturer shall report:”

[3] Amend clause 4.5.1 to read:

“4.5.1 for vehicles specified in clause 4.3, the three fuel consumption results and three carbon dioxide emissions results for the vehicle from Part One (urban) and Part Two (extra-urban) of the Type I test and from the full (combined) Type I test, as determined in accordance with Annex 6 or Annex 8 of Appendix B or Appendix C; and”

[4] Amend clause 4.5.2.1 to read:

“4.5.2.1 the combined fuel consumption and combined carbon dioxide emissions results (if applicable) as determined in accordance with Annex 8 of Appendix B or Appendix C;”

[5] Amend clause 4.5.2.2 to read:

“4.5.2.2 the energy consumption results as determined in accordance with Annex 7 or Annex 8 of Appendix B or Appendix C; and”

[6] Amend clause 4.5.2.3 to read:

“4.5.2.3 the range as determined in accordance with Annex 9 of Appendix B or Appendix C.”

[7] Amend clause 5.1 to read:

“5.1 The following provisions of Appendix B and Appendix C are not applicable:

Section 3	Application for Approval
Section 4	Approval
Section 6	Modification and extension of approval of the approved type
Section 9	Conformity of Production
Section 10	Penalties for non-conformity of production
Section 11	Production definitely discontinued
Section 12	Names and addresses of technical services responsible for conducting approval tests and of administrative departments
Annex 1	Essential characteristics of the vehicle powered by an internal combustion engine only and information concerning the conduct of tests
Annex 2	Essential characteristics of the vehicle powered by an electric power train only and information concerning the conduct of tests
Annex 3	Essential characteristics of the vehicle powered by a hybrid electric power train and information concerning the conduct of tests
Annex 4	Communication
Annex 5	Arrangements of approval marks”

[8] Amend clause 5.2 to read:

“5.2 References to ‘Regulation No. 83’ in Appendix B are amended to read ‘Appendix A of ADR 79/02’.”

[9] Insert new clause 5.3 to read:

“5.3 References to ‘Regulation No. 83’ in Appendix C are amended to read ‘Appendix A of ADR 79/03 or ADR 79/04’.”

[10] Amend clause 6.1.1 to read:

“6.1.1 The versions of UN ECE Regulation 101 deemed acceptable under clause 6.1 are UN ECE Regulation 101 Revision 2.”

[11] Insert new Appendix C which reads:

# Vehicle Standard (Australian Design Rule 81/02 — Fuel Consumption Labelling for Light Vehicles) 2008

## APPENDIX C

### United Nations Regulation No. 101, Revision 2

(including all amendments up to and including the 01 series of amendments)

UNIFORM PROVISIONS CONCERNING THE APPROVAL OF PASSENGER CARS POWERED BY AN INTERNAL COMBUSTION ENGINE ONLY, OR POWERED BY A HYBRID ELECTRIC POWER TRAIN WITH REGARD TO THE MEASUREMENT OF THE EMISSION OF CARBON DIOXIDE AND FUEL CONSUMPTION AND/OR THE MEASUREMENT OF ELECTRIC ENERGY CONSUMPTION AND ELECTRIC RANGE, AND OF CATEGORIES M1 AND N1 VEHICLES POWERED BY AN ELECTRIC POWER TRAIN ONLY WITH REGARD TO THE MEASUREMENT OF ELECTRIC ENERGY CONSUMPTION AND ELECTRIC RANGE

**Consolidated version prepared by the Department of Infrastructure and Transport**

### Note

Certain clauses of this Appendix C have been amended from the consolidated UN Regulation 101 by the Department of Infrastructure and Transport as indicated in the table below.

Clause	Amendment
Paragraphs 2.17 and 2.18	Renumbered as 2.18 and 2.19 respectively
Paragraph 5.2.3.	The words 'petrol, LPG or diesel' amended to read 'petrol, LPG, diesel or ethanol'
Annex 6, paragraphs 1.1. and 1.3.	References to 'Annex 4' amended to read 'Annex 4a'
Annex 6, paragraphs 1.4.1. and 1.4.2.	References to 'appendix 8 to Annex 4 to Regulation No. 83' amended to read 'paragraph 6.6 of Annex 4a of Regulation No. 83'
Annex 6, paragraph 1.4.3	The words 'fuel consumption in litres per 100 km (in the case of petrol, LPG, diesel or biodiesel)' amended to read 'fuel consumption in litres per 100 km (in the case of petrol, LPG, diesel, ethanol or biodiesel)'
Annex 8, paragraphs 1.4.1. and 1.4.2.	References to 'appendix 1 to Annex 4 to Regulation No. 83' amended to read 'paragraphs 6.1.1., 6.1.2. and 6.1.3.1. of Annex 4a of Regulation No. 83'
Annex 8, paragraphs 1.4.2. and 1.4.3	The reference to 'paragraph 2.3.3 of Annex 4 to Regulation No. 83' amended to read 'paragraph 6.1.3.2. of Annex 4a of Regulation No. 83'.
Annex 8 paragraphs 3.2.3.4., 3.3.2.4., 4.3.2.4.	References to 'Annex 4' amended to read 'Annex 4a'
Annex 9, paragraphs 4.2.2.1.1. and 4.2.2.2.1 (adopted from Revision 2 – Amendment 2)	References to 'Appendices 2, 3, and 4 of Annex 4' amended to read 'appendices 1, 6 and 7 of Annex 4a'
Annex 10, paragraphs 1.1 and 2.1	References to 'paragraph 2.16' amended to read 'paragraph 2.19'
Annex 10, paragraph 3.2.1.	Reference to 'paragraph 5.3 of Annex 4' amended to read 'paragraph 6.3 of Annex 4a'

Regulation No. 101

UNIFORM PROVISIONS CONCERNING THE APPROVAL OF PASSENGER CARS  
POWERED BY AN INTERNAL COMBUSTION ENGINE ONLY, OR POWERED BY A  
HYBRID ELECTRIC POWER TRAIN WITH REGARD TO THE MEASUREMENT OF THE  
EMISSION OF CARBON DIOXIDE AND FUEL CONSUMPTION AND/OR THE  
MEASUREMENT OF ELECTRIC ENERGY CONSUMPTION AND ELECTRIC RANGE,  
AND OF CATEGORIES M1 AND N1 VEHICLES POWERED BY AN ELECTRIC POWER  
TRAIN ONLY WITH REGARD TO THE MEASUREMENT OF ELECTRIC ENERGY  
CONSUMPTION AND ELECTRIC RANGE

CONTENTS

REGULATION	<u>Page</u>
1. Scope .....	5
2. Definitions .....	5
3. Application for approval .....	7
4. Approval .....	7
5. Specifications and tests .....	9
6. Modification and extension of approval of the approved type .....	11
7. Conditions of extension of the type approval for vehicle type .....	12
8. Special provisions .....	13
9. Conformity of production .....	13
10. Penalties for non-conformity of production .....	23
11. Production definitely discontinued .....	23
12. Names and addresses of technical services responsible for conducting approval tests and of administrative departments .....	23

CONTENTS (continued)

ANNEXES

- Annex 1 - Essential characteristics of the vehicle powered by an internal combustion engine only and information concerning the conduct of tests
- Annex 2 - Essential characteristics of the vehicle powered by an electric power train only and information concerning the conduct of tests
- Annex 3 - Essential characteristics of the vehicle powered by a hybrid electric power train and information concerning the conduct of tests
- Annex 4 - Communication concerning the approval or extension or refusal or withdrawal of approval or production definitely discontinued of a vehicle type pursuant to Regulation No. 101
- Annex 5 - Arrangements of approval marks
- Annex 6 - Method of measuring emissions of carbon dioxide and fuel consumption of vehicles powered by an internal combustion engine only
- Annex 7 - Method of measuring the electric energy consumption of vehicles powered by an electric power train only
- Annex 7 - Appendix - Determination of the total road load power of a vehicle powered by an electric power train only, and calibration of the dynamometer
- Annex 8 - Method of measuring the emissions of carbon dioxide, fuel consumption and the electric energy consumption of vehicles powered by a hybrid electric power train
- Annex 8 - Appendix 1 - Electrical energy/power storage device state of charge (SOC) profile for OVC HEVs
- Annex 8 - Appendix 2 - Method for measuring the electricity balance of the battery of a NOVC HEV
- Annex 9 - Method of measuring the electric range of vehicles powered by an electric power train only or by a hybrid electric power train
- Annex 10 - Emissions test procedure for a vehicle equipped with a periodically regenerating system

## 1. SCOPE

This Regulation applies to vehicles of categories M<sub>1</sub> and N<sub>1</sub> <sup>1/</sup> with regard to:

- (a) the measurement of the emission of carbon dioxide (CO<sub>2</sub>) and fuel consumption and/or to the measurement of electric energy consumption and electric range of vehicles powered by an internal combustion engine only or by a hybrid electric power train,
- (b) and to the measurement of electric energy consumption and electric range of vehicles powered by an electric power train only.

It does not apply to a category N<sub>1</sub> vehicle if both:

- (a) the engine type fitted to that type of vehicle has received type-approval pursuant to Regulation No. 49, and
- (b) the total annual worldwide production of N<sub>1</sub> vehicles of the manufacturer is less than 2,000 units.

## 2. DEFINITIONS

For the purposes of this Regulation,

- 2.1. "Approval of a vehicle" means the approval of a vehicle type with regard to the measurement of energy consumption (fuel or electric energy);
- 2.2. "Vehicle type" means a category of power driven vehicles which do not differ in such essential respects as body, power train, transmission, traction battery (if applicable), tyres and unladen mass;
- 2.3. "Unladen mass" means the mass of the vehicle in running order without crew, passengers or load, but with the fuel tank full (if any), cooling liquid, service and traction batteries, oils, onboard charger, portable charger, tools and spare wheel, whatever is appropriate for the vehicle considered and if provided by the manufacturer of the vehicle;
- 2.4. "Reference mass" means the unladen mass of the vehicle increased by a uniform figure of 100 kg;
- 2.5. "Maximum mass" means the technically permissible maximum mass declared by the manufacturer (this mass may be greater than the maximum mass authorized by the national administration);

---

<sup>1/</sup> As defined in Annex 7 to the Consolidated Resolution on the Construction of Vehicles (R.E.3) (TRANS/WP.29/78/Rev.1/Amend.2).



- 2.6. "Test mass" for the pure electric vehicles, means the "reference mass" for the category M1 vehicles and the unladen mass plus half the full load for the category N1 vehicles;
- 2.7. "Lorry" means a motor vehicle of category N1 which is designed and constructed exclusively or principally for conveying goods.
- 2.8. "Van" means a lorry with the cab integrated into the body.
- 2.9. "Cold start device" means a device which enriches the air/fuel mixture of the engine temporarily, to assist starting;
- 2.10. "Starting aid" means a device which assists engine starting without enrichment of the air/fuel mixture, e.g. glow plug, changed injection timing, etc.;
- 2.11. "Power train" means the system of energy storage device(s), energy converter(s) and transmission(s) that converts stored energy to mechanical energy delivered at the wheels for propulsion of the vehicle;
- 2.12. "Internal combustion engine vehicle" means vehicle powered by an internal combustion engine only;
- 2.13. "Electric power train" means a system consisting of one or more electric energy storage devices (e.g. a battery, electromechanical flywheel or super capacitor), one or more electric power conditioning devices and one or more electric machines that convert stored electric energy to mechanical energy delivered at the wheels for propulsion of the vehicle;
- 2.14. "Pure electric vehicle" means vehicle powered by an electric power train only;
- 2.15. "Hybrid power train" means a power train with at least two different energy converters and two different energy storage systems (on-board the vehicle) for the purpose of vehicle propulsion;
- 2.15.1. "Hybrid electric power train" means a power train that, for the purpose of mechanical propulsion, draws energy from both of the following on-vehicle sources of stored energy/power:
- a consumable fuel
  - an electrical energy/power storage device (e.g.: battery, capacitor, flywheel/generator ...)
- 2.16. OVC range: the total distance covered during complete combined cycles run until the energy imparted by external charging of the battery (or other electric energy

storage device) is depleted, as measured according to the procedure described in Annex 9.

- 2.17. "Hybrid vehicle (HV)" means a vehicle powered by a hybrid power train;
- 2.17.1. "Hybrid electric vehicle (HEV)" means a vehicle powered by a hybrid electric power train;
- 2.18. "Electric range", for vehicles powered by an electric power train only or by a hybrid electric power train with off-vehicle charging, means distance that can be driven electrically on one fully charged battery (or other electric energy storage device) as measured according to the procedure described in Annex 9.
- 2.19. "Periodically regenerating system" means an anti-pollution device (e.g. catalytic converter, particulate trap) that requires a periodical regeneration process in less than 4,000 km of normal vehicle operation. If a regeneration of an anti-pollution device occurs at least once per Type I test and that has already regenerated at least once during the vehicle preparation cycle, it will be considered as a continuously regenerating system, which does not require a special test procedure. Annex 10 does not apply to continuously regenerating systems.

At the request of the manufacturer, the test procedure specific to periodically regenerating systems will not apply to a regenerative device if the manufacturer provides data to the type approval authority that, during cycles where regeneration occurs, emission of CO<sub>2</sub> does not exceed the declared value by more than 4 per cent after agreement of the technical service.

### 3. APPLICATION FOR APPROVAL

- 3.1. The application for approval of a vehicle type with regard to the measurement of the emission of carbon dioxide and fuel consumption and/or to the measurement of electric energy consumption and electric range shall be submitted by the vehicle manufacturer or by his duly accredited representative.
- 3.2. It shall be accompanied by the under-mentioned documents in triplicate and the following particulars:
- 3.2.1. A description of the essential characteristics of the vehicle comprising all the particulars referred to in Annex 1, Annex 2 or Annex 3, depending on the power train type. At the request of the technical service in charge of the tests or the manufacturer, complementary technical information could be considered for specific vehicles which are particularly fuel efficient.

- 3.2.2. Description of the basic features of the vehicle, including those used in drafting Annex 4.
- 3.3. A vehicle, representative of the vehicle type to be approved, shall be submitted to the technical services responsible for conducting approval tests. For M<sub>1</sub> and N<sub>1</sub> vehicles, type-approved with respect to their emissions according to Regulation No. 83, the technical service will check during the test that this vehicle, if powered by an internal combustion engine only or by a hybrid electric power train, conforms to the limit values applicable to that type, as described in Regulation No. 83
- 3.4. The competent authority shall verify the existence of satisfactory provisions to ensure an effective check of conformity of production before approval of the vehicle type is granted.
4. APPROVAL
- 4.1. If the emissions of CO<sub>2</sub> and fuel consumption and/or the electric energy consumption and electric range of the vehicle type submitted for approval pursuant to this Regulation have been measured according to the conditions specified in paragraph 5. below, approval of that vehicle type shall be granted.
- 4.2. An approval number shall be assigned to each type approved. Its first two digits shall indicate the series of amendments (at present 01) incorporating the most recent major technical amendments made to the Regulation at the time of issue of the approval. The same Contracting Party shall not assign the same number to another vehicle type.
- 4.3. Notice of approval or of extension or refusal of approval of a vehicle type pursuant to this Regulation shall be communicated to the Contracting Parties to the 1958 Agreement applying this Regulation by means of a form conforming to the model in Annex 4 to this Regulation.
- 4.4. There shall be affixed, conspicuously and in a readily accessible place specified on the approval form, to every vehicle conforming to a vehicle type approved under this Regulation, an international approval mark consisting of:
- 4.4.1. A circle surrounding the letter "E" followed by the distinguishing number of the country which has granted approval 2/;

---

2/ 1 for Germany, 2 for France, 3 for Italy, 4 for the Netherlands, 5 for Sweden, 6 for Belgium, 7 for Hungary, 8 for the Czech Republic, 9 for Spain, 10 for Serbia and Montenegro, 11 for the United Kingdom, 12 for Austria, 13 for Luxembourg, 14 for Switzerland, 15 (vacant), 16 for Norway, 17 for Finland, 18 for Denmark, 19 for Romania, 20 for Poland, 21 for Portugal, 22 for the Russian Federation, 23 for Greece, 24 for Ireland, 25 for Croatia, 26 for Slovenia, 27 for Slovakia, 28 for Belarus, 29 for Estonia, 30 (vacant), 31 for Bosnia and Herzegovina, 32 for Latvia, 33 (vacant), 34 for Bulgaria, 35 (vacant), 36 for Lithuania, 37 for Turkey, 38 (vacant), 39 for Azerbaijan, 40 for The former Yugoslav Republic of Macedonia, 41 (vacant), 42 for the European Community (Approvals are granted by its Member States using their respective ECE symbol), 43 for Japan, 44 (vacant),

- 4.4.2. The number of this Regulation, followed by the letter "R", a dash and the approval number to the right of the circle prescribed in paragraph 4.4.1.
- 4.5. If the vehicle conforms to a vehicle type approved under one or more other Regulations annexed to the Agreement, in the country which has granted approval under this Regulation, the symbol prescribed in paragraph 4.4.1. need not be repeated; in such a case, the Regulation and approval numbers and the additional symbols of all the Regulations under which approval has been granted in the country which has granted approval under this Regulation shall be placed in vertical columns to the right of the symbol prescribed in paragraph 4.4.1.
- 4.6. The approval mark shall be clearly legible and be indelible.
- 4.7. The approval mark shall be placed close to or on the vehicle data plate.
- 4.8. Annex 5 to this Regulation gives examples of arrangements of the approval mark.

## 5. SPECIFICATIONS AND TESTS

### 5.1. General

The components liable to affect the emissions of CO<sub>2</sub> and fuel consumption or the electric energy consumption shall be so designed, constructed and assembled as to enable the vehicle, in normal use, despite the vibrations to which it may be subjected, to comply with the provisions of this Regulation.

### 5.2. Description of tests for vehicles powered by an internal combustion engine only

- 5.2.1. The emissions of CO<sub>2</sub> and fuel consumption shall be measured according to the test procedure described in Annex 6. Vehicles which do not attain the acceleration and maximum speed values required in the test cycle must be operated with the accelerator control fully depressed until they once again reach the required operating curve. Deviations from the test cycle must be recorded in the test report.
- 5.2.2. For CO<sub>2</sub> emissions the results of the test must be expressed in grams per kilometre (g/km) rounded to the nearest whole number.

---

45 for Australia, 46 for Ukraine, 47 for South Africa, 48 for New Zealand, 49 for Cyprus, 50 for Malta and 51 for the Republic of Korea. Subsequent numbers shall be assigned to other countries in the chronological order in which they ratify or accede to the Agreement Concerning the Adoption of Uniform Technical Prescriptions for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these Prescriptions, and the numbers thus assigned shall be communicated by the Secretary-General of the United Nations to the Contracting Parties to the Agreement.

- 5.2.3. Fuel consumption values must be expressed in litres per 100 km (in the case of petrol, LPG, diesel or ethanol) or in m<sup>3</sup> per 100 km (in the case of NG), and are calculated according to paragraph 1.4.3. of Annex 6 by the carbon balance method using the measured emissions of CO<sub>2</sub> and the other carbon related emissions (CO and HC). The results will be rounded to the first decimal place.
- 5.2.4. For the purpose of the calculation mentioned in paragraph 5.2.3., the fuel consumption shall be expressed in appropriate units and the following fuel characteristics shall be used:
- (a) Density: measured on the test fuel according to ISO 3675 or an equivalent method. For petrol, diesel, biodiesel and ethanol (E85) the density measured at 15 °C will be used; for LPG and natural gas/biomethane a reference density will be used, as follows:
- 0.538 kg/litre for LPG  
0.654 kg/m<sup>3</sup> for NG<sup>3/</sup>;
- (b) Hydrogen-carbon ratio: fixed values will be used which are:
- C<sub>1</sub>H<sub>1,89</sub>O<sub>0,016</sub> for petrol (E5);  
C<sub>1</sub>H<sub>1,86</sub>O<sub>0,005</sub> for diesel (B5);  
C<sub>1</sub>H<sub>2,525</sub> for LPG (liquefied petroleum gas) ;  
CH<sub>4</sub> for NG (natural gas) and biomethane;  
C<sub>1</sub>H<sub>2,74</sub>O<sub>0,385</sub> for ethanol (E85).”
- 5.3. Description of tests for vehicles powered by an electric power train only
- 5.3.1. The technical service in charge of the tests conducts the measurement of the electric energy consumption according to the method and test cycle described in Annex 7 to this Regulation.
- 5.3.2. The technical service in charge of the tests conducts the measurement of the electric range of the vehicle according to the method described in Annex 9.
- The electric range measured by this method is the only one which may be included in sales promotional material.
- 5.3.3. The result of the electric energy consumption must be expressed in Watt hours per kilometre (Wh/km) and the range in km, both rounded to the nearest whole number.

---

<sup>3/</sup> Mean value of G20 and G23 reference fuels at 15 °C.

5.4. Description of tests for vehicles powered by a hybrid electric power train

- 5.4.1. The technical service in charge of the tests conducts the measurement of the emissions of CO<sub>2</sub> and of the electric energy consumption according to the test procedure described in Annex 8.
- 5.4.2. The results of the test for CO<sub>2</sub> emissions must be expressed in grams per kilometre (g/km) rounded to the nearest whole number.
- 5.4.3. Fuel consumption values must be expressed in litres per 100 km (in the case of petrol, LPG or diesel) or in m<sup>3</sup> per 100 km (in the case of NG), and are calculated according to paragraph 1.4.3. of Annex 6 by the carbon balance method using the measured emissions of CO<sub>2</sub> and the other carbon related emissions (CO and HC). The results will be rounded to the first decimal place.
- 5.4.4. For the purpose of the calculation mentioned in paragraph 5.4.3., the prescriptions and values of paragraph 5.2.4. shall apply.
- 5.4.5. If applicable, the result of the electric energy consumption must be expressed in Watt hours per kilometre (Wh/km), rounded to the nearest whole number.
- 5.4.6. The technical service in charge of the tests conducts the measurement of the electric range of the vehicle according to the method described in Annex 9 to this Regulation. The result shall be expressed in km, rounded to the nearest whole number.

The electric range measured by this method is the only one which may be included in sales promotional material and which may be used for the calculations of Annex 8.

5.5. Interpretation of results

- 5.5.1. The CO<sub>2</sub> value or the value of electric energy consumption adopted as the type approval value shall be the value declared by the manufacturer if the value measured by the technical service does not exceed the declared value by more than 4 per cent. The measured value can be lower without any limitations.

In the case of vehicles powered by an internal combustion engine only which are equipped with periodically regenerating systems as defined in paragraph 2.19., the results are multiplied by the factor  $K_i$  obtained from Annex 10 before being compared to the declared value.

- 5.5.2. If the measured value of CO<sub>2</sub> or electric energy consumption exceeds the manufacturer's declared CO<sub>2</sub> or electric energy consumption value by more than 4 per cent, then another test is run on the same vehicle.

When the average of the two test results does not exceed the manufacturer's declared value by more than 4 per cent, then the value declared by the manufacturer is taken as the type approval value.

- 5.5.3. If the average still exceeds the declared value by more than 4 per cent, a final test is run on the same vehicle. The average of the three test results is taken as the type approval value.

## 6. MODIFICATION AND EXTENSION OF APPROVAL OF THE APPROVED TYPE

- 6.1. Every modification of the approved type shall be notified to the administrative department which approved the type. The department may then either:

6.1.1. Consider that the modifications made are unlikely to have an appreciable adverse effect on the values of CO<sub>2</sub> and fuel consumption or electric energy consumption and that, in this case, the original approval will be valid for the modified vehicle type; or

6.1.2. Require a further test report from the technical service responsible for conducting the tests according to conditions in paragraph 7. of this Regulation.

6.2. Confirmation or extension of approval, specifying the alterations, shall be communicated by the procedure specified in paragraph 4.3. to the Parties to the 1958 Agreement applying this Regulation.

6.3. The competent authority which grants the extension of the approval shall assign a series number for such an extension and inform thereof the other Parties to the 1958 Agreement applying this Regulation by means of a communication form conforming to the model in Annex 4 to this Regulation.

## 7. CONDITIONS OF EXTENSION OF THE TYPE APPROVAL FOR VEHICLE TYPE

- 7.1. Vehicles powered by an internal combustion engine only, except vehicles equipped with a periodically regenerating emission control system

The type approval can be extended to vehicles from the same type or from a different type differing with regard to the following characteristics of Annex 4 if the CO<sub>2</sub> emissions measured by the technical service do not exceed the type approved value

by more than 4 per cent for vehicles of category M<sub>1</sub> and 6 per cent for vehicles of category N<sub>1</sub>:

- 7.1.1. Reference mass.
- 7.1.2. Maximum authorized mass.
- 7.1.3. Type of bodywork:
  - (a) for M<sub>1</sub>: saloon, hatchback, station wagon, coupé, convertible, multipurpose vehicle <sup>4/</sup>
  - (b) for N<sub>1</sub>: lorry, van.
- 7.1.4. Overall gear ratios.
- 7.1.5. Engine equipment and accessories.
- 7.2. Vehicles powered by an internal combustion engine only and equipped with a periodically regenerating emission control system

The type approval can be extended to vehicles from the same type or from a different type, differing with regard to the characteristics of Annex 4, given in paragraphs 7.1.1. to 7.1.5. above, but not exceeding the family characteristics of Annex 10, if the CO<sub>2</sub> emissions measured by the technical service do not exceed the type approved value by more than 4 per cent for vehicles of category M<sub>1</sub> and 6 per cent for vehicles of category N<sub>1</sub>, and where the same K<sub>i</sub> factor is applicable.

The type approval can be extended also to vehicles from the same type, but with a different K<sub>i</sub> factor, if the corrected CO<sub>2</sub> value measured by the technical service does not exceed the type approved value by more than 4 per cent for vehicles of category M<sub>1</sub> and 6 per cent for vehicles of category N<sub>1</sub>.

- 7.3. Vehicles powered by an electric power train only

Extensions may be granted after agreement with the technical service responsible for conducting the tests.

---

<sup>4/</sup> As defined in Annex 7 to the Consolidated Resolution on the Construction of Vehicles (R.E.3) (TRANS/WP.29/78/Rev.1/Amend.2)



7.4. Vehicles powered by a hybrid electric power train

The type approval can be extended to vehicles from the same type or from a different type differing with regard to the following characteristics of Annex 4 if the CO<sub>2</sub> emissions and the electric energy consumption measured by the technical service do not exceed the type approved value by more than 4 per cent for vehicles of category M<sub>1</sub> and 6 per cent for vehicles of category N<sub>1</sub>:

7.4.1. Reference mass.

7.4.2. Maximum authorized mass.

7.4.3. Type of bodywork:

- (a) for M<sub>1</sub>:saloon, hatchback, station wagon, coupé, convertible, multipurpose vehicle 4/
- (b) for N<sub>1</sub>:lorry, van.

7.4.4. With respect to a change in any other characteristic extensions may be granted after agreement with the technical service responsible for conducting the tests.

7.5. Extension of approval of vehicles of category N<sub>1</sub> within a family, if powered by an internal combustion engine only or by a hybrid electric power train

7.5.1. For vehicles of category N<sub>1</sub> that are approved as members of a vehicle family using the procedure in paragraph 7.6.2., the type-approval can be extended to vehicles from within the same family only if the technical service estimates that the fuel consumption of the new vehicle does not exceed the fuel consumption of the vehicle on which the family's fuel consumption is based.

Approvals may also be extended to vehicles which:

- (a) are up to 110 kg heavier than the family member tested, provided that they are within 220 kg of the lightest member of the family,
- (b) have a lower overall transmission ratio than the family member tested due solely to a change in tyre sizes, and
- (c) conform with the family in all other respects.

7.5.2. For vehicles of category N<sub>1</sub> that are approved as members of a vehicle family using the procedure in paragraph 7.6.3., the type-approval can be extended to vehicles from within the same family without additional testing only if the technical service estimates that the fuel consumption of the new vehicle falls within the limits made up of those two vehicles in the family that have the lowest and the highest fuel consumption, respectively.

7.6. Approval of vehicles of category N<sub>1</sub> within a family, if powered by an internal combustion engine only or by a hybrid electric power train

Vehicles of category N<sub>1</sub> can be approved within a family as defined in paragraph 7.6.1. using one of the two alternative methods described in paragraphs 7.6.2. and 7.6.3.

7.6.1. N<sub>1</sub> vehicles may be grouped together into a family for the purposes of this Regulation if the following parameters are identical or within the specified limits:

7.6.1.1. Identical parameters are:

- (a) manufacturer and type as defined in Annex 4, item 2.,
- (b) engine capacity,
- (c) emission control system type,
- (d) fuel system type as defined in Annex 4, item 6.7.2.

7.6.1.2. The following parameters have to be within the following limits:

- (a) transmission overall ratios (no more than 8 per cent higher than the lowest) as defined in Annex 4, item 6.10.3.,
- (b) reference mass (no more than 220 kg lighter than the heaviest),
- (c) frontal area (no more than 15 per cent smaller than the largest),
- (d) engine power (no more than 10 per cent less than the highest value).

7.6.2. A vehicle family, as defined in paragraph 7.6.1., can be approved with CO<sub>2</sub> emission and fuel consumption data that are common to all members of the family. The technical service must select for testing the member of the family which the service considers to have the highest CO<sub>2</sub> emission. The measurements are performed as described in paragraph 5. and Annex 6, and the results according to the method described in paragraph 5.5. are used as type-approval values that are common to all members of the family.

7.6.3. Vehicles that are grouped in a family as defined in paragraph 7.6.1. can be approved with individual CO<sub>2</sub> emission and fuel consumption data for each of the family members. The technical service selects for testing the two vehicles, which the service considers to have the highest and the lowest CO<sub>2</sub> emissions respectively. The measurements are performed as described in paragraph 5. and Annex 6. If the manufacturer's data for these two vehicles falls within the tolerance limits described in paragraph 5.5., the CO<sub>2</sub> emissions declared by the manufacturer for all members of the vehicle family can be used as type-approval values. If the manufacturer's data do not fall within the tolerance limits, the results according to the method described in paragraph 5.5. are used as type-approval values and the technical service shall select an appropriate number of other family members for additional tests

## 8. SPECIAL PROVISIONS

In the future, vehicles with special energy efficient technologies may be offered which could be submitted to complementary testing programmes. These would be specified at a later stage which can be claimed by the manufacturer in order to demonstrate the advantages of the solution.

## 9. CONFORMITY OF PRODUCTION

9.1. Vehicles approved to this Regulation shall be so manufactured as to conform to the type approved vehicle.

9.2. So as to verify that the conditions set out in paragraph 9.1. are complied with, appropriate production checks shall be carried out.

9.3. Vehicles powered by an internal combustion engine only:

9.3.1. As a general rule, measures to ensure the conformity of production with regard to CO<sub>2</sub> emissions from vehicles are checked on the basis of the description in the type approval certificate conforming to the model in Annex 4 of this Regulation.

The control of production conformity is based on an assessment made by the competent authority of the manufacturer's auditing procedure in order to ensure conformity of the vehicle type with respect to the emission of CO<sub>2</sub>.

If the authority is not satisfied with the standard of the manufacturer's auditing procedure, they may require that verification tests be carried out on vehicles in production.

9.3.1.1. If a measurement of the emissions of CO<sub>2</sub> must be carried out on a vehicle type that has had one or several extensions, the tests will be carried out on the vehicle(s) available at the time of the test (vehicle(s) described in the first document or in subsequent extensions).

9.3.1.1.1. Conformity of the vehicle for the CO<sub>2</sub> test.

9.3.1.1.1.1. Three vehicles are randomly taken in the series and are tested according to the procedure as described in Annex 6.

9.3.1.1.1.2. If the authority is satisfied with the production standard deviation given by the manufacturer, the tests are carried out according to paragraph 9.3.2.

If the authority is not satisfied with the production standard deviation given by the manufacturer, the tests are carried out according to paragraph 9.3.3.


9.3.1.1.1.3. The production of a series is regarded as conforming or non-conforming, on the basis of tests on the three sampled vehicles, once a pass or fail decision is reached for CO<sub>2</sub>, according to the test criteria applied in the appropriate table.

If no pass or fail decision is reached for CO<sub>2</sub>, a test is carried out on an additional vehicle (see figure 1).

9.3.1.1.1.4. In the case of periodically regenerating systems as defined in paragraph 2.19., the results shall be multiplied by the factor  $K_i$  obtained by the procedure specified in Annex 10 at the time when type approval was granted.

At the request of the manufacturer, testing may be carried out immediately after a regeneration has been completed.

Figure 1

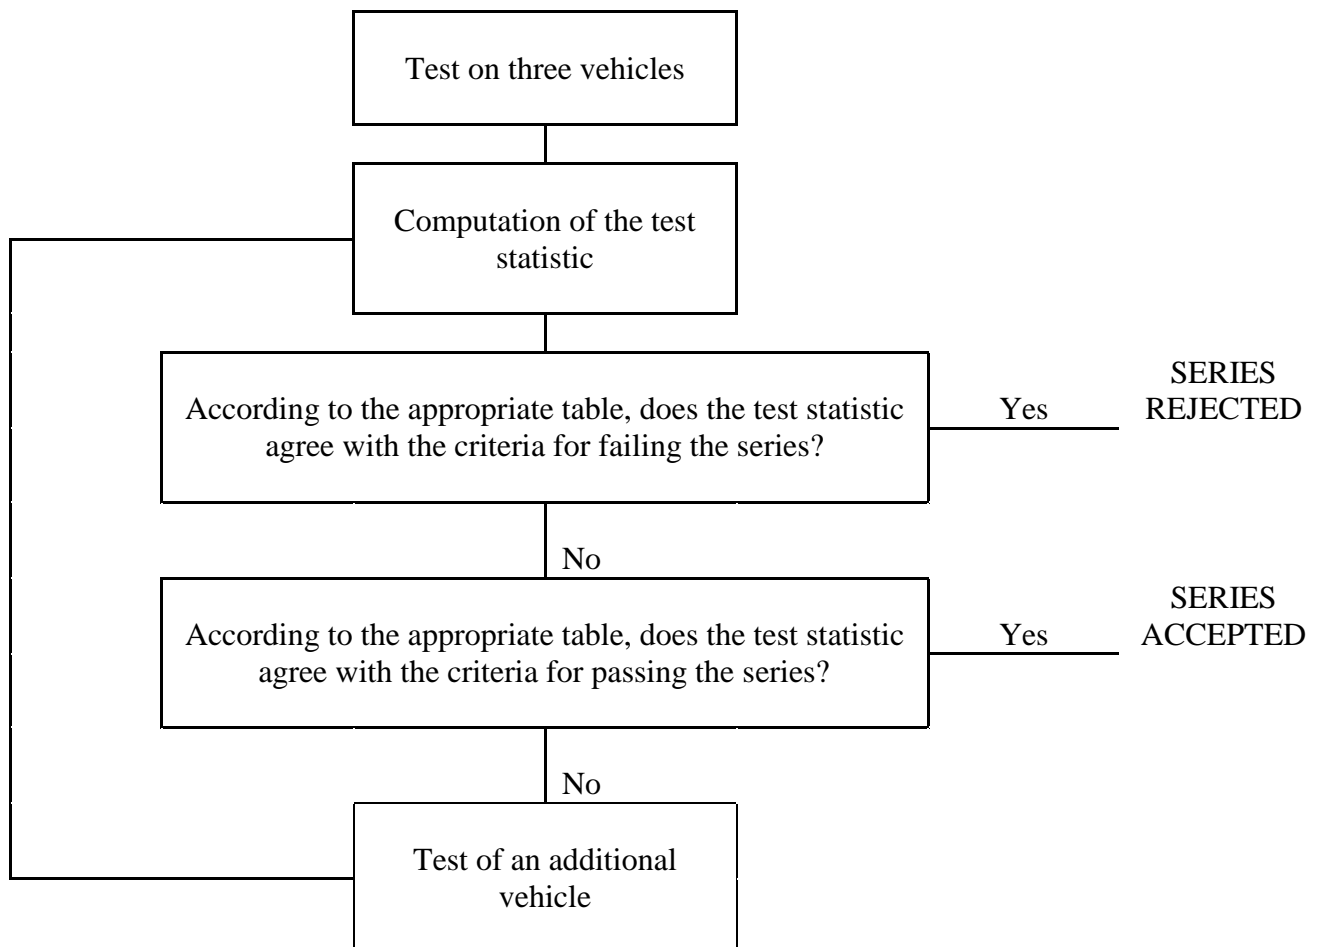

9.3.1.1.2. Notwithstanding the requirements of Annex 6, the tests will be carried out on vehicles which have not travelled any distance.

9.3.1.1.2.1. However, at the request of the manufacturer, the tests will be carried out on vehicles which have been run-in a maximum of 15,000 km.

In this case, the running-in procedure will be conducted by the manufacturer who shall undertake not to make any adjustments to those vehicles.

9.3.1.1.2.2. If the manufacturer asks to conduct a running-in procedure ('x' km, where  $x \leq 15,000$  km), it may be carried out as follows:

The emissions of CO<sub>2</sub> will be measured at zero and at 'x' km on the first tested vehicle (which can be the type approval vehicle);

The evolution coefficient (EC) of the emissions between zero and 'x' km will be calculated as follows:

$$EC = \frac{\text{Emissions at } x \text{ km}}{\text{Emissions at zero km}}$$

The value of EC may be less than 1.

The following vehicles will not be subjected to the running-in procedure, but their zero km emissions will be modified by the evolution coefficient, EC.

In this case, the values to be taken will be:

The value at 'x' km for the first vehicle;

The values at zero km multiplied by the evolution coefficient for the following vehicles.

9.3.1.1.2.3. As an alternative to this procedure, the car manufacturer can use a fixed evolution coefficient, EC, of 0.92 and multiply all values of CO<sub>2</sub> measured at zero km by this factor.

9.3.1.1.2.4. The reference fuels described in Annexes 10 and 10a of Regulation No. 83 shall be used for this test.

9.3.2. Conformity of production when manufacturer's statistical data is available.

9.3.2.1. The following sections describe the procedure to be used to verify the CO<sub>2</sub> conformity of production requirements when the manufacturer's production standard deviation is satisfactory.

9.3.2.2. With a minimum sample size of three the sampling procedure is set so that the probability of a lot passing a test with 40 per cent of the production defective is 0.95 (producer's risk = 5 per cent) while the probability of a lot being accepted with 65 per cent of the production defective is 0.1 (consumer's risk = 10 per cent).

9.3.2.3. The following procedure is used (see figure 1):

Let L be the natural logarithm of the CO<sub>2</sub> type approval value:

$x_i$  = the natural logarithm of the measurement for the i-th vehicle of the sample;

s = an estimate of the production standard deviation (after taking the natural logarithm of the measurements);

n = the current sample number.

9.3.2.4. Compute for the sample, the test statistic quantifying the sum of the standardized deviations to the limit and defined as:

$$\frac{1}{s} \sum_{i=1}^n (L - x_i)$$

9.3.2.5. Then:

9.3.2.5.1. if the test statistic is greater than the pass decision number for the sample given in table 1, a pass decision is reached;

9.3.2.5.2. if the test statistic is less than the fail decision number for the sample size given in table 1, a fail decision is reached;

9.3.2.5.3. otherwise, an additional vehicle is tested according to Annex 6 and the procedure is applied to the sample with one unit more.

Table 1

Sample Size (cumulative number of vehicles tested)	Pass Decision No.	Fail Decision No.
(a)	(b)	(c)
3	3.327	- 4.724
4	3.261	- 4.790
5	3.195	- 4.856
6	3.129	- 4.922
7	3.063	- 4.988
8	2.997	- 5.054
9	2.931	- 5.120
10	2.865	- 5.185
11	2.799	- 5.251
12	2.733	- 5.317
13	2.667	- 5.383
14	2.601	- 5.449
15	2.535	- 5.515
16	2.469	- 5.581
17	2.403	- 5.647
18	2.337	- 5.713
19	2.271	- 5.779
20	2.205	- 5.845
21	2.139	- 5.911
22	2.073	- 5.977
23	2.007	- 6.043
24	1.941	- 6.109
25	1.875	- 6.175
26	1.809	- 6.241
27	1.743	- 6.307
28	1.677	- 6.373
29	1.611	- 6.439
30	1.545	- 6.505
31	1.479	- 6.571
32	- 2.112	- 2.112

9.3.3. Conformity of production when manufacturer's statistical data is unsatisfactory or unavailable.

9.3.3.1. The following sections describe the procedure to be used to verify the CO<sub>2</sub> conformity of production requirements when the manufacturer's evidence of production standard deviation is either unsatisfactory or unavailable.

9.3.3.2. With a minimum sample size of three the sampling procedure is set so that the probability of a lot passing a test with 40 per cent of the production defective is 0.95 (producer's risk = 5 per cent) while the probability of a lot being accepted with 65 per cent of the production defective is 0.1 (consumer's risk = 10 per cent).

9.3.3.3. The measurement of CO<sub>2</sub> is considered to be log normally distributed and should first be transformed by taking the natural logarithms. Let  $m_0$  and  $m$  denote the minimum and maximum sample sizes respectively ( $m_0 = 3$  and  $m = 32$ ) and let  $n$  denote the current sample number.

9.3.3.4. If the natural logarithms of the measurements in the series are  $x_1, x_2, \dots, x_j$  and  $L$  is the natural logarithm of the CO<sub>2</sub> type approval value, then define:

$$d_j = x_j - L$$

$$\bar{d}_n = \frac{1}{n} \sum_{j=1}^n d_j$$

$$v_n^2 = \frac{1}{n} \sum_{j=1}^n (d_j - \bar{d}_n)^2$$

9.3.3.5. Table 2 shows values of the pass ( $A_n$ ) and fail ( $B_n$ ) decision numbers against current sample number. The test statistic is the ratio  $\bar{d}_n / v_n$  and shall be used to determine whether the series has passed or failed as follows:

for  $m_0 \leq n \leq m$ :

9.3.3.5.1. pass the series if  $\bar{d}_n / v_n \leq A_n$ ;

9.3.3.5.2. fail the series if  $\bar{d}_n / v_n \geq B_n$ ;

9.3.3.5.3. take another measurement if  $A_n < \bar{d}_n / v_n < B_n$ .



Table 2

Sample Size (cumulative number of vehicles tested) n	Pass Decision No. $A_n$	Fail Decision No. $B_n$
(a)	(b)	(c)
3	- 0.80380	16.64743
4	- 0.76339	7.68627
5	- 0.72982	4.67136
6	- 0.69962	3.25573
7	- 0.67129	2.45431
8	- 0.64406	1.94369
9	- 0.61750	1.59105
10	- 0.59135	1.33295
11	- 0.56542	1.13566
12	- 0.53960	0.97970
13	- 0.51379	0.85307
14	- 0.48791	0.74801
15	- 0.46191	0.65928
16	- 0.43573	0.58321
17	- 0.40933	0.51718
18	- 0.38266	0.45922
19	- 0.35570	0.40788
20	- 0.32840	0.36203
21	- 0.30072	0.32078
22	- 0.27263	0.28343
23	- 0.24410	0.24943
24	- 0.21509	0.21831
25	- 0.18557	0.18970
26	- 0.15550	0.16328
27	- 0.12483	0.13880
28	- 0.09354	0.11603
29	- 0.06159	0.09480
30	- 0.02892	0.07493
31	0.00449	0.05629
32	0.03876	0.03876

9.3.3.6. Remarks

The following recursive formulae are useful for computing successive values of the test statistic:

$$\bar{d}_n = \left( 1 - \frac{1}{n} \right) \bar{d}_{n-1} + \frac{1}{n} d_n$$

$$v_n^2 = \left( 1 - \frac{1}{n} \right) v_{n-1}^2 + \frac{(\bar{d}_n - d_n)^2}{n-1}$$

$$( n = 2, 3, \dots; \bar{d}_1 = d_1; v_1 = 0 )$$

9.4. Vehicles powered by an electric power train only:

As a general rule, measures to ensure the conformity of production with regard to electric energy consumption is checked on the basis of the description in the type approval certificate set out in Annex 4 to this Regulation.

9.4.1. The holder of the approval shall, in particular:

9.4.1.1. Ensure the existence of procedures for the effective control of production quality;

9.4.1.2. Have access to the equipment necessary for checking conformity with each approved type;

9.4.1.3. Ensure that the data concerning the test result are recorded and that the annexed documents are available during a period to be agreed with the administrative service;

9.4.1.4. Analyse the results of each type of test so as to monitor and ensure the consistency of the characteristics of the product, taking into account the variations admissible in industrial manufacture;

9.4.1.5. Make sure that for each type of vehicle tests prescribed in Annex 7 to this Regulation are carried out; notwithstanding the requirements of paragraph 2.3.1.6. of Annex 7, at the request of the manufacturer, the tests will be carried out on vehicles which have not travelled any distance;

9.4.1.6. Make sure that any collections of samples or test pieces demonstrating non-conformity with the type test under consideration is followed by a subsequent sampling and a further test. All necessary steps shall be taken to re-establish the conformity of production.

- 9.4.2. The competent authorities issuing the approval may verify at any time the methods applied in each production unit.
- 9.4.2.1. In every inspection, the records of tests and production monitoring shall be communicated to the visiting inspector.
- 9.4.2.2. The inspector may select at random the samples to be tested in the manufacturer's laboratory. The minimum number of samples may be determined on the basis of the results of the manufacturer's own checks.
- 9.4.2.3. When the quality standard does not seem satisfactory or when it seems necessary to verify the validity of the tests conducted under paragraph 9.4.2.2., the inspector shall collect samples to be sent to the technical service which carried out the approval tests.
- 9.4.2.4. The competent authorities may carry out all the tests prescribed in this Regulation.

9.5. Vehicles powered by a hybrid electric power train

As a general rule, measures to ensure the conformity of production with regard to CO<sub>2</sub> emissions and electric energy consumption from hybrid electric vehicles is checked on the basis of the description in the type approval certificate conforming to the model in Annex 4 of this Regulation.

The control of production conformity is based on an assessment made by the competent authority of the manufacturer's auditing procedure in order to ensure conformity of the vehicle type with respect to the emission of CO<sub>2</sub> and the electric energy consumption.

If the authority is not satisfied with the standard of the manufacturer's auditing procedure, they may require that verification tests be carried out on vehicles in production.

Conformity for CO<sub>2</sub> emissions is checked using the statistical procedures described in paragraphs 9.3.1. to 9.3.3. Vehicles are tested according to the procedure described in Annex 8 to this Regulation.

9.6. Actions to be taken in case of non-conformity of production

If, during inspections, non-conformity is observed, the competent authority shall ensure that all necessary steps are taken to re-establish conformity of production as soon as possible.

10. PENALTIES FOR NON-CONFORMITY OF PRODUCTION

10.1. The approval granted in respect of a vehicle type pursuant to this Regulation may be withdrawn if the requirements laid down in paragraph 9.1. are not complied with.

10.2. If a Contracting Party to the 1958 Agreement which applies this Regulation withdraws an approval it has previously granted, it shall forthwith so notify the other Contracting Parties applying this Regulation, by means of a communication form conforming to the model in Annex 4 of this Regulation.

11. PRODUCTION DEFINITELY DISCONTINUED

If the holder of the approval completely ceases to manufacture a type of vehicle approved in accordance with this Regulation, he shall so inform the authority which granted the approval. Upon receiving the relevant communication, that authority shall inform thereof the other Parties to the 1958 Agreement applying this Regulation by means of a communication form conforming to the model in Annex 4 to this Regulation.

12. NAMES AND ADDRESSES OF TECHNICAL SERVICES RESPONSIBLE FOR CONDUCTING APPROVAL TESTS AND OF ADMINISTRATIVE DEPARTMENTS

The Parties to the 1958 Agreement which apply this Regulation shall communicate to the United Nations Secretariat the names and addresses of the technical services responsible for conducting approval tests and the administrative departments which grant approval and to which, forms certifying approval or refusal or extension or withdrawal of approval, issued in other countries, are to be sent.

Annex 1

ESSENTIAL CHARACTERISTICS OF THE VEHICLE  
POWERED BY AN INTERNAL COMBUSTION ENGINE ONLY  
AND INFORMATION CONCERNING THE CONDUCT OF TESTS

The following information, when applicable, shall be supplied in triplicate and shall include a summary.

If there are drawings, they shall be to an appropriate scale and show sufficient detail. They shall be presented in A4 format or folded to that format. In the case of microprocessor controlled functions, appropriate operating information shall be supplied.

1. GENERAL
  - 1.1. Make (name of manufacturer): .....
  - 1.2. Type and commercial description (mention any variants): .....
  - 1.3. Means of identification of type, if marked on the vehicle: .....
  - 1.3.1. Location of that mark: .....
  - 1.4. Category of vehicle: .....
  - 1.5. Name and address of manufacturer: .....
  - 1.6. Name and address of manufacturer's authorized representative where appropriate: .....
  
2. GENERAL CONSTRUCTION CHARACTERISTICS OF THE VEHICLE
  - 2.1. Photographs and/or drawings of a representative vehicle: .....
  - 2.2. Powered axles (number, position, interconnection): .....
  
3. MASSES (kilograms) (refer to drawing where applicable)
  - 3.1. Mass of the vehicle with bodywork in running order, or mass of the chassis with cab if the manufacturer does not fit the bodywork (including coolant, oils, fuel, tools, spare wheel and driver): .....
  - 3.2. Technically permissible maximum laden mass as stated by the manufacturer: .
  
4. DESCRIPTION OF POWER TRAIN AND POWER TRAIN COMPONENTS
  - 4.1. Internal combustion engine
    - 4.1.1. Engine manufacturer: .....
    - 4.1.2. Manufacturer's engine code (as marked on the engine, or other means of identification): .....
    - 4.1.2.1. Working principle: positive-ignition/compression-ignition, four-stroke/two-stroke 1/
    - 4.1.2.2. Number, arrangement and firing order of cylinders:
      - 4.1.2.2.1. Bore: 2/ ..... mm
      - 4.1.2.2.2. Stroke: 2/ ..... mm

- 4.1.2.3. Engine capacity: 3/ ..... cm<sup>3</sup>  
4.1.2.4. Volumetric compression ratio: 4/ .....  
4.1.2.5. Drawings of combustion chamber and piston crown: .....  
4.1.2.6. Idle speed: 4/ .....  
4.1.2.7. Carbon monoxide content by volume in the exhaust gas with the engine idling:  
..... per cent (according to the manufacturer's specifications) 4/ .....  
4.1.2.8. Maximum net power: ..... kW at min<sup>-1</sup>  
4.1.3. Fuel: petrol / unleaded petrol / diesel oil / LPG / NG 1/  
4.1.3.1. Research octane number (RON): .....  
4.1.4. Fuel feed  
4.1.4.1. By carburettor(s): yes/no 1/  
4.1.4.1.1. Make(s): .....  
4.1.4.1.2. Type(s): .....  
4.1.4.1.3. Number fitted: .....  
4.1.4.1.4. Adjustments: 4/  
4.1.4.1.4.1. Jets: .....  
4.1.4.1.4.2. Venturis: .....  
4.1.4.1.4.3. Float-chamber level: .....  
4.1.4.1.4.4. Mass of float: .....  
4.1.4.1.4.5. Float needle: .....  
4.1.4.1.5. Cold start system: manual/automatic 1/  
4.1.4.1.5.1. Operating principle: .....  
4.1.4.1.5.2. Operating limits/settings: 1/ 4/ .....  
4.1.4.2. By fuel injection (compression-ignition only): yes/no 1/  
4.1.4.2.1. System description: .....  
4.1.4.2.2. Working principle: direct-injection/pre-chamber/swirl chamber 1/  
4.1.4.2.3. Injection pump  
4.1.4.2.3.1. Make(s): .....  
4.1.4.2.3.2. Type(s): .....  
4.1.4.2.3.3. Maximum fuel delivery 1/ 4/: ..... mm<sup>3</sup> / stroke or cycle at a pump speed  
of 1/ 4/: ..... min<sup>-1</sup> or characteristic diagram: .....  
4.1.4.2.3.4. Injection timing: 4/ .....  
4.1.4.2.3.5. Injection advance curve: 4/ .....  
4.1.4.2.3.6. Calibration procedure: test bench/engine 1/ .....  
4.1.4.2.4. Governor  
4.1.4.2.4.1. Type: .....  
4.1.4.2.4.2. Cut-off point:  
4.1.4.2.4.2.1. Cut-off point under load: ..... min<sup>-1</sup>  
4.1.4.2.4.2.2. Cut-off point without load: ..... min<sup>-1</sup>  
4.1.4.2.4.3. Idling speed: ..... min<sup>-1</sup>  
4.1.4.2.5. Injector(s):  
4.1.4.2.5.1. Make(s): .....  
4.1.4.2.5.2. Type(s): .....

- 4.1.4.2.5.3. Opening pressure 4/:.....kPa or characteristic diagram:.....
- 4.1.4.2.6. Cold start system
- 4.1.4.2.6.1. Make(s):.....
- 4.1.4.2.6.2. Type(s): .....
- 4.1.4.2.6.3. Description: .....
- 4.1.4.2.7. Auxiliary starting aid
- 4.1.4.2.7.1. Make(s):.....
- 4.1.4.2.7.2. Type(s): .....
- 4.1.4.2.7.3. Description: .....
- 4.1.4.3. By fuel injection (positive-ignition only): yes/no 1/
- 4.1.4.3.1. System description:
- 4.1.4.3.2. Working principle 1/: intake manifold (single/multi-point) / direct injection / other (specify)
- Control unit – type (or No.): .....
- Fuel regulator – type: .....
- Air-flow sensor - type: .....
- Fuel distributor - type: .....) information to be given
- Pressure regulator - type: .....) in the case of continuous
- Micro-switch – type: .....) injection;
- Idle adjusting screw – type: .....) in the case of other
- Throttle housing - type: .....) systems, equivalent
- Water temperature sensor – type: .....) details
- Air temperature sensor – type: .....
- Air temperature switch – type: .....
- Electromagnetic interference protection.....
- Description and/or drawing: .....
- 4.1.4.3.3. Make(s):.....
- 4.1.4.3.4. Type(s): .....
- 4.1.4.3.5. Injectors: Opening pressure 4/: .....kPa or characteristic diagram 4/:.....
- 4.1.4.3.6. Injection timing: .....
- 4.1.4.3.7. Cold start system: .....
- 4.1.4.3.7.1. Operating principle(s): .....
- 4.1.4.3.7.2. Operating limits/settings 1/ 4/: .....
- 4.1.4.4. Feed pump
- 4.1.4.4.1. Pressure: 4/:..... kPa or characteristic diagram: .....
- 4.1.4.5. By LPG fuelling system: yes/no 1/
- 4.1.4.5.1. Approval number according to Regulation No. 67 and documentation:.....
- 4.1.4.5.2. Electronic Engine Management Control Unit for LPG-fuelling:
- 4.1.4.5.2.1. Make(s):.....
- 4.1.4.5.2.2. Type:.....
- 4.1.4.5.2.3. Emission related adjustment possibilities: .....
- 4.1.4.5.3. Further documentation:

- 4.1.4.5.3.1. Description of the safeguarding of the catalyst at switch-over from petrol to LPG or back: .....
- 4.1.4.5.3.2. System lay-out (electrical connections, vacuum connections compensation hoses, etc): .....
- 4.1.4.5.3.3. Drawing of the symbol: .....
- 4.1.4.6. By NG fuelling system: yes/no 1/
- 4.1.4.6.1. Approval number according to Regulation No. 67: .....
- 4.1.4.6.2. Electronic Engine Management Control Unit for NG-fuelling:
  - 4.1.4.6.2.1. Make(s): .....
  - 4.1.4.6.2.2. Type: .....
  - 4.1.4.6.2.3. Emission related adjustment possibilities: .....
- 4.1.4.6.3. Further documentation:
  - 4.1.4.6.3.1. Description of the safeguarding of the catalyst at switch-over from petrol to NG or back: .....
  - 4.1.4.6.3.2. System lay-out (electrical connections, vacuum connections compensation hoses, etc.): .....
  - 4.1.4.6.3.3. Drawing of the symbol: .....
- 4.1.5. Ignition
  - 4.1.5.1. Make(s): .....
  - 4.1.5.2. Type(s): .....
  - 4.1.5.3. Working principle: .....
  - 4.1.5.4. Ignition advance curve 4/: .....
  - 4.1.5.5. Static ignition timing 4/: ..... degrees before TDC
  - 4.1.5.6. Contact-point gap 4/: .....
  - 4.1.5.7. Dwell-angle 4/: .....
  - 4.1.5.8. Spark plugs
    - 4.1.5.8.1. Make: .....
    - 4.1.5.8.2. Type: .....
    - 4.1.5.8.3. Spark plug gap setting: .....mm
  - 4.1.5.9. Ignition coil
    - 4.1.5.9.1. Make: .....
    - 4.1.5.9.2. Type: .....
  - 4.1.5.10. Ignition condenser
    - 4.1.5.10.1. Make: .....
    - 4.1.5.10.2. Type: .....
- 4.1.6. Cooling system: liquid/air 1/
- 4.1.7. Intake system:
  - 4.1.7.1. Pressure charger: yes/no 1/
    - 4.1.7.1.1. Make(s): .....
    - 4.1.7.1.2. Type(s): .....
    - 4.1.7.1.3. Description of the system (maximum charge pressure: ..... kPa, waste-gate)
  - 4.1.7.2. Inter-cooler: yes/no 1/



- 4.1.7.3. Description and drawings of inlet pipes and their accessories (plenum chamber, heating device, additional air intakes, etc.): .....
- 4.1.7.3.1. Intake manifold description (drawings and/or photographs): .....
- 4.1.7.3.2. Air filter, drawings: ....., or
- 4.1.7.3.2.1. Make(s):.....
- 4.1.7.3.2.2. Type(s): .....
- 4.1.7.3.3. Intake silencer, drawings: ....., or
- 4.1.7.3.3.1. Make(s):.....
- 4.1.7.3.3.2. Type(s): .....
- 4.1.8. Exhaust system
- 4.1.8.1. Description and drawings of the exhaust system: .....
- 4.1.9. Valve timing or equivalent data:
- 4.1.9.1. Maximum lift of valves, angles of opening and closing, or timing details of alternative distribution systems, in relation to dead centres:.....
- 4.1.9.2. Reference and/or setting ranges: 1/ .....
- 4.1.10. Lubricant used:
- 4.1.10.1. Make:.....
- 4.1.10.2. Type:.....
- 4.1.11. Measures taken against air pollution:
- 4.1.11.1. Device for recycling crankcase gases (description and drawings):.....
- 4.1.11.2. Additional pollution control devices (if any, and if not covered by another heading):
- 4.1.11.2.1. Catalytic converter: yes/no 1/
- 4.1.11.2.1.1. Number of catalytic converters and elements: .....
- 4.1.11.2.1.2. Dimensions and shape of the catalytic converter(s) (volume,...): .....
- 4.1.11.2.1.3. Type of catalytic action: .....
- 4.1.11.2.1.4. Total charge of precious metal: .....
- 4.1.11.2.1.5. Relative concentration: .....
- 4.1.11.2.1.6. Substrate (structure and material): .....
- 4.1.11.2.1.7. Cell density: .....
- 4.1.11.2.1.8. Type of casing for catalytic converter(s):.....
- 4.1.11.2.1.9. Positioning of the catalytic converter(s) (place and reference distances in the exhaust system): .....
- 4.1.11.2.1.10. Regeneration systems/method of exhaust after-treatment systems, description:
- 4.1.11.2.1.10.1. The number of Type I operating cycles, or equivalent engine test bench cycles, between two cycles where regenerative phases occur under the conditions equivalent to Type I test (Distance 'D' in figure 10/1 in Annex 10): .....
- 4.1.11.2.1.10.2. Description of method employed to determine the number of cycles between two cycles where regenerative phases occur: .....
- 4.1.11.2.1.10.3. Parameters to determine the level of loading required before regeneration occurs (i.e. temperature, pressure etc.): .....
- 4.1.11.2.1.10.4. Description of method used to load system in the test procedure described in paragraph 3.1. of Annex 10: .....

- 4.1.11.2.1.11. Oxygen sensor: type
- 4.1.11.2.1.11.1. Location of oxygen sensor: .....
- 4.1.11.2.1.11.2. Control range of oxygen sensor: .....
- 4.1.11.2.2. Air injection: yes/no 1/
- 4.1.11.2.2.1. Type (pulse air, air pump,...): .....
- 4.1.11.2.3. Exhaust gas recirculation (EGR): yes/no 1/
- 4.1.11.2.3.1. Characteristics (flow,...): .....
- 4.1.11.2.4. Evaporative emission control system.  
Complete detailed description of the devices and their state of tune: .....
- Drawing of the evaporative control system: .....
- Drawing of the carbon canister: .....
- Drawing of the fuel tank with indication of capacity and material: .....
- 4.1.11.2.5. Particulate trap: yes/no 1/
- 4.1.11.2.5.1. Dimensions and shape of the particulate trap (capacity):.....
- 4.1.11.2.5.2. Type of particulate trap and design: .....
- 4.1.11.2.5.3. Location of the particulate trap (reference distances in the exhaust system):....
- 4.1.11.2.5.4. Regeneration system/method. Description and drawing: .....
- 4.1.11.2.5.4.1. The number of Type I operating cycles, or equivalent engine test bench cycle,  
between two cycles where regeneration phases occur under the conditions  
equivalent to Type I test (Distance 'D' in figure 10/1 in Annex 10):.....
- 4.1.11.2.5.4.2. Description of method employed to determine the number of cycles between two  
cycles where regenerative phases occur: .....
- 4.1.11.2.5.4.3. Parameters to determine the level of loading required before regeneration occurs  
(i.e. temperature, pressure, etc.): .....
- 4.1.11.2.5.4.4. Description of method used to load system in the test procedure described in  
paragraph 3.1. of Annex 10: .....
- 4.1.11.2.6. Other systems (description and working principle): .....
  
- 4.2. Power train control unit
- 4.2.1. Make: .....
- 4.2.2. Type: .....
- 4.2.3. Identification number: .....
  
- 4.3. Transmission
- 4.3.1. Clutch (type):.....
- 4.3.1.1. Maximum torque conversion:.....
- 4.3.2. Gearbox: .....
- 4.3.2.1. Type:.....
- 4.3.2.2. Location relative to the engine: .....
- 4.3.2.3. Method of control: .....

4.3.3. Gear ratios

	Gearbox ratios	Final drive ratios	Total ratios
Maximum for CVT (*)			
1			
2			
3			
4, 5, others			
Minimum for CVT (*)			
Reverse			

(\*) CVT - Continuously variable transmission

5. SUSPENSION

5.1. Tyres and wheels

5.1.1. Tyre/wheel combination(s) (for tyres indicate size designation, minimum load-capacity index, minimum speed category symbol; for wheels, indicate rim size(s) and off-set(s):

5.1.1.1. Axles

5.1.1.1.1. Axle 1: .....

5.1.1.1.2. Axle 2: .....

5.1.1.1.3. Axle 3: .....

5.1.1.1.4. Axle 4: etc. ....

5.1.2. Upper and lower limit of rolling circumference:

5.1.2.1. Axles

5.1.2.1.1. Axle 1: .....

5.1.2.1.2. Axle 2: .....

5.1.2.1.3. Axle 3: .....

5.1.2.1.4. Axle 4: etc. ....

5.1.3. Tyre pressure(s) as recommended by the manufacturer: .....kPa

6. BODYWORK

6.1. Seats: .....

6.1.1. Number of seats: .....

1/ Strike out what does not apply.

2/ This value must be rounded to the nearest tenth of a millimetre.

3/ This value must be calculated with  $\pi = 3.1416$  and rounded to the nearest  $\text{cm}^3$ .

4/ Specify the tolerance.

Annex 2

ESSENTIAL CHARACTERISTICS OF THE VEHICLE POWERED BY AN ELECTRIC  
POWER TRAIN ONLY AND INFORMATION CONCERNING THE CONDUCT OF TESTS

The following information, when applicable, shall be supplied in triplicate and shall include a summary.

If there are drawings, they shall be to an appropriate scale and show sufficient detail. They shall be presented in A4 format or folded to that format. In the case of microprocessor controlled functions, appropriate operating information shall be supplied.

1. GENERAL
  - 1.1. Make (name of manufacturer): .....
  - 1.2. Type and commercial description (mention any variants): .....
  - 1.3. Means of identification of type, if marked on the vehicle: .....
  - 1.3.1. Location of that mark: .....
  - 1.4. Category of vehicle: .....
  - 1.5. Name and address of manufacturer: .....
  - 1.6. Name and address of manufacturer's authorized representative  
where appropriate: .....
  
2. GENERAL CONSTRUCTION CHARACTERISTICS OF THE VEHICLE
  - 2.1. Photographs and/or drawings of a representative vehicle: .....
  - 2.2. Powered axles (number, position, interconnection): .....
  
3. MASSES (kilograms) (refer to drawing where applicable)
  - 3.1. Mass of the vehicle with bodywork in running order, or mass of the chassis with cab if the manufacturer does not fit the bodywork (including coolant, oils, fuel, tools, spare wheel and driver): .....
  - 3.2. Technically permissible maximum laden mass as stated by the manufacturer: .
  
4. DESCRIPTION OF THE POWER TRAIN AND POWER TRAIN COMPONENTS
  - 4.1. General description of electric power train
    - 4.1.1. Make: .....
    - 4.1.2. Type: .....
    - 4.1.3. Use 3/: Monomotor/multimotors (number): .....
    - 4.1.4. Transmission arrangement: parallel/transaxial/others, to precise: .....
    - .....
    - 4.1.5. Test voltage: ..... V
    - 4.1.6. Motor nominal speed: ..... min<sup>-1</sup>
    - 4.1.7. Motor maximum speed: ..... min<sup>-1</sup>

or by default:

- reducer outlet shaft/gear box speed (specify gear engaged): .....min<sup>-1</sup>
- 4.1.8. Maximum power speed: 2/ .....min<sup>-1</sup>
- 4.1.9. Maximum power: ..... kW
- 4.1.10. Maximum thirty minutes power: ..... kW
- 4.1.11. Flexible range (where  $P \geq 90$  per cent of max. power):  
 speed at the beginning of range: .....min<sup>-1</sup>  
 speed at the end of range: .....min<sup>-1</sup>
- 4.2. Traction battery
- 4.2.1. Trade name and mark of the battery:.....
- 4.2.2. Kind of electro-chemical couple: .....
- 4.2.3. Nominal voltage: ..... V
- 4.2.4. Battery maximum thirty minutes power (constant power discharge): ..... kW
- 4.2.5. Battery performance in 2 h discharge (constant power or constant current): 3/
- 4.2.5.1. Battery energy: ..... kWh
- 4.2.5.2. Battery capacity: ..... Ah in 2 h
- 4.2.5.3. End of discharge voltage value: ..... V
- 4.2.6. Indication of the end of the discharge that leads to a compulsory  
 stop of the vehicle: 4/ .....
- 4.2.7. Battery mass: ..... kg
- 4.3. Electric Motor
- 4.3.1. Working principle:
- 4.3.1.1. direct current/alternating current 3/ /number of phases:.....
- 4.3.1.2. separate excitation/series/compound 3/
- 4.3.1.3. synchronous/asynchronous 3/
- 4.3.1.4. coiled rotor/with permanent magnets/with housing 3/
- 4.3.1.5. number of poles of the motor: .....
- 4.3.2. Inertia mass: .....
- 4.4. Power controller
- 4.4.1. Make
- 4.4.2. Type
- 4.4.3. Control principle: vectorial/open loop/closed/other (to be specified): 3/.....
- 4.4.4. Maximum effective current supplied to the motor: 2/ ..... A  
 during .....seconds
- 4.4.5. Voltage range use: ..... V to ..... V
- 4.5. Cooling system:  
 motor : liquid/air 3/  
 controller : liquid/air 3/

- 4.5.1. Liquid-cooling equipment characteristics:  
4.5.1.1. Nature of the liquid ..... circulating pumps: yes/no 3/  
4.5.1.2. Characteristics or make(s) and type(s) of the pump:.....  
4.5.1.3. Thermostat: setting: .....  
4.5.1.4. Radiator: drawing(s) or make(s) and type(s):.....  
4.5.1.5. Relief valve: pressure setting: .....  
4.5.1.6. Fan: characteristics or make(s) and type(s):.....  
4.5.1.7. Fan duct: .....
- 4.5.2. Air-cooling equipment characteristics  
4.5.2.1. Blower: characteristics or make(s) and type(s): .....  
4.5.2.2. Standard air ducting: .....  
4.5.2.3. Temperature regulating system: yes/no 3/  
4.5.2.4. Brief description: .....  
4.5.2.5. Air filter: ..... make(s): ..... type(s): .....
- 4.5.3. Temperatures admitted by the manufacturer  
maximum temperature  
4.5.3.1. Motor outlet: ....°C  
4.5.3.2. controller inlet: ....°C  
4.5.3.3. at motor reference point(s): ....°C  
4.5.3.4. at controller reference point(s): ....°C
- 4.6. Insulating category: .....
- 4.7. International protection (IP)-code: .....
- 4.8. Lubrication system principle: 3/ Bearings: friction/ball  
Lubricant: grease/oil  
Seal: yes/no  
Circulation: with/without
- 4.9. Description of the transmission  
4.9.1. Drive wheels: front/rear/4x4 3/  
4.9.2. Type of transmission: manual/automatic 3/  
4.9.3. Number of gear ratios:.....

4.9.3.1.

Gear	Wheel speed	Gear ratio	Motor speed
1			
2			
3			
4			
5			
Reverse			

minimum CVT (Continuous Variable Transmission): .....

maximum CVT: .....

4.9.4.

Recommendations for changing the gears

1 → 2: ..... 2 → 1: .....  
2 → 3: ..... 3 → 2: .....  
3 → 4: ..... 4 → 3: .....  
4 → 5: ..... 5 → 4: .....  
overdrive in: ..... overdrive out: .....

5.

**CHARGER**

5.1.

Charger: on board/external 3/

In case of an external unit, define the charger (trademark, model): .....

5.2.

Description of the normal profile of charge: .....

5.3.

Specification of mains:

5.3.1.

Type of mains: single phase/three phase 3/

5.3.2.

Voltage: .....

5.4.

Rest period recommended between the end of the discharge and the start of the charge: .....

5.5.

Theoretical duration of a complete charge: .....

6.

**SUSPENSION**

6.1.

Tyres and wheels

6.1.1.

Tyre/wheel combination(s) (for tyres indicate size designation, minimum load-capacity index, minimum speed category symbol; for wheels, indicate rim size(s) and off-set(s):

6.1.1.1.

Axles

6.1.1.1.1.

Axle 1: .....

6.1.1.1.2.

Axle 2: .....

6.1.1.1.3.

Axle 3: .....

6.1.1.1.4.

Axle 4: etc. ....

5.1.2.

Upper and lower limit of rolling circumference:

6.1.2.1.

Axles

5.1.2.1.1.

Axle 1: .....

- 6.1.2.1.2. Axle 2:.....
- 5.1.2.1.3. Axle 3:.....
- 6.1.2.1.4. Axle 4: etc.....
- 6.1.3. Tyre pressure(s) as recommended by the manufacturer: ..... kPa

7. BODYWORK

- 7.1. Seats: .....
- 7.1.1. Number of seats: .....

8. INERTIA MASS

- 8.1. Equivalent inertia mass of complete front axle: .....
- 8.2. Equivalent inertia mass of complete rear axle: .....

- 
- 1/ For non-conventional motors or systems, the manufacturer will supply data equivalent to those requested hereafter.
  - 2/ Specify tolerances.
  - 3/ Strike out what does not apply.
  - 4/ If applicable.



Annex 3

ESSENTIAL CHARACTERISTICS OF THE VEHICLE  
POWERED BY A HYBRID ELECTRIC POWER TRAIN AND  
INFORMATION CONCERNING THE CONDUCT OF TESTS

The following information, when applicable, shall be supplied in triplicate and shall include a summary.

If there are drawings, they shall be to an appropriate scale and show sufficient detail. They shall be presented in A4 format or folded to that format. In the case of microprocessor controlled functions, appropriate operating information shall be supplied.

1. GENERAL
  - 1.1. Make (name of manufacturer): .....
  - 1.2. Type and commercial description (mention any variants): .....
  - 1.3. Means of identification of type, if marked on the vehicle: .....
  - 1.3.1. Location of that mark: .....
  - 1.4. Category of vehicle: .....
  - 1.5. Name and address of manufacturer: .....
  - 1.6. Name and address of manufacturer's authorized representative where appropriate: .....
  
2. GENERAL CONSTRUCTION CHARACTERISTICS OF THE VEHICLE
  - 2.1. Photographs and/or drawings of a representative vehicle: .....
  - 2.2. Powered axles (number, position, interconnection): .....
  
3. MASSES (kilograms) (refer to drawing where applicable)
  - 3.1. Mass of the vehicle with bodywork in running order, or mass of the chassis with cab if the manufacturer does not fit the bodywork (including coolant, oils, fuel, tools, spare wheel and driver): .....
  - 3.2. Technically permissible maximum laden mass as stated by the manufacturer: .
  
4. DESCRIPTION OF POWER TRAIN AND POWER TRAIN COMPONENTS
  - 4.1. Description of the hybrid electric vehicle
    - 4.1.1. Category of Hybrid Electric vehicle: Off Vehicle Charging/Not Off Vehicle charging 1/
    - 4.1.2. Operating mode switch : with/without 1/
      - 4.1.2.1. Selectable modes:
        - 4.1.2.1.1. Pure electric : yes/no 1/
        - 4.1.2.1.2. Pure fuel consuming : yes/no 1/
        - 4.1.2.1.3. Hybrid modes : yes/no 1/ (if yes, short description)

- 4.1.3. General description of Hybrid Electric power train
- 4.1.3.1. Drawing of the hybrid power train system layout (engine/ motor/ transmission combination 1/): .....
- 4.1.3.2. Description of the general hybrid power train working principle: .....
- 4.1.4. Vehicle electric range (according Annex 9): ..... km
- 4.1.5. Manufacturer's recommendation for preconditioning: .....
- 4.2. Internal combustion engine
- 4.2.1. Engine manufacturer: .....
- 4.2.2. Manufacturer's engine code (as marked on the engine, or other means of identification): .....
- 4.2.2.1. Working principle: positive-ignition/compression-ignition, four-stroke/two-stroke 1/
- 4.2.2.2. Number, arrangement and firing order of cylinders:.....
- 4.2.2.2.1. Bore: 2/ .....mm
- 4.2.2.2.2. Stroke: 2/ .....mm
- 4.2.2.3. Engine capacity: 3/ .....cm<sup>3</sup>
- 4.2.2.4. Volumetric compression ratio: 4/ .....
- 4.2.2.5. Drawings of combustion chamber and piston crown: .....
- 4.2.2.6. Idle speed: 4/ .....
- 4.2.2.7. Carbon monoxide content by volume in the exhaust gas with the engine idling: ..... per cent (according to the manufacturer's specifications) 4/
- 4.2.2.8. Maximum net power: ..... kW at ..... min<sup>-1</sup>
- 4.2.3. Fuel: petrol / unleaded petrol / diesel oil / LPG / NG 1/
- 4.2.3.1. Research octane number (RON): .....
- 4.2.4. Fuel feed
- 4.2.4.1. By carburettor(s): yes/no 1/
- 4.2.4.1.1. Make(s):.....
- 4.2.4.1.2. Type(s): .....
- 4.2.4.1.3. Number fitted: .....
- 4.2.4.1.4. Adjustments: 4/
- 4.2.4.1.4.1. Jets: .....
- 4.2.4.1.4.2. Venturis: .....
- 4.2.4.1.4.3. Float-chamber level: .....
- 4.2.4.1.4.4. Mass of float: .....
- 4.2.4.1.4.5. Float needle: .....
- 4.2.4.1.5. Cold start system: manual/automatic 1/
- 4.2.4.1.5.1. Operating principle: .....
- 4.2.4.1.5.2. Operating limits/settings: 1/ 4/ .....
- 4.2.4.2. By fuel injection (compression-ignition only): yes/no 1/
- 4.2.4.2.1. System description: .....
- 4.2.4.2.2. Working principle: direct-injection/pre-chamber/swirl chamber 1/

- 4.2.4.2.3. Injection pump
- 4.2.4.2.3.1. Make(s):.....
- 4.2.4.2.3.2. Type(s): .....
- 4.2.4.2.3.3. Maximum fuel delivery 1/ 4/: ..... mm<sup>3</sup> / stroke or cycle at a pump speed  
 of 1/ 4/: ..... min<sup>-1</sup> or characteristic diagram: .....
- 4.2.4.2.3.4. Injection timing: 4/ .....
- 4.2.4.2.3.5. Injection advance curve: 4/.....
- 4.2.4.2.3.6. Calibration procedure: test bench/engine 1/
- 4.2.4.2.4. Governor
- 4.2.4.2.4.1. Type:.....
- 4.2.4.2.4.2. Cut-off point: .....
- 4.2.4.2.4.2.1. Cut-off point under load: .....min<sup>-1</sup>
- 4.2.4.2.4.2.2. Cut-off point without load: .....min<sup>-1</sup>
- 4.2.4.2.4.3. Idling speed: .....min<sup>-1</sup>
- 4.2.4.2.5. Injector(s):
- 4.2.4.2.5.1. Make(s):.....
- 4.2.4.2.5.2. Type(s): .....
- 4.2.4.2.5.3. Opening pressure 4/: ..... kPa or characteristic diagram:.....
- 4.2.4.2.6. Cold start system
- 4.2.4.2.6.1. Make(s):.....
- 4.2.4.2.6.2. Type(s): .....
- 4.2.4.2.6.3. Description: .....
- 4.2.4.2.7. Auxiliary starting aid
- 4.2.4.2.7.1. Make(s):.....
- 4.2.4.2.7.2. Type(s): .....
- 4.2.4.2.7.3. Description: .....
- 4.2.4.3. By fuel injection (positive-ignition only): yes/no 1/
- 4.2.4.3.1. System description: .....
- 4.2.4.3.2. Working principle 1/: intake manifold (single/multi-point) / direct injection /  
 other (specify)
- Control unit – type (or No.): ..... )
- Fuel regulator – type: ..... )
- Air-flow sensor - type: ..... )
- Fuel distributor - type: ..... ) information to be given
- Pressure regulator - type: ..... ) in the case of continuous
- Micro-switch – type: ..... ) injection;
- Idle adjusting screw - type: ..... ) in the case of other
- Throttle housing - type: ..... ) systems, equivalent
- Water temperature sensor - type: ..... ) details
- Air temperature sensor - type: ..... )
- Air temperature switch - type: ..... )
- Electromagnetic interference protection .....
- Description and/or drawing: .....

- 4.2.4.3.3. Make(s):.....
- 4.2.4.3.4. Type(s): .....
- 4.2.4.3.5. Injectors: Opening pressure 4/: ..... kPa or characteristic diagram 4/:.....
- 4.2.4.3.6. Injection timing: .....
- 4.2.4.3.7. Cold start system: .....
- 4.2.4.3.7.1. Operating principle(s): .....
- 4.2.4.3.7.2. Operating limits/settings 1/4/: .....
- 4.2.4.4. Feed pump
- 4.2.4.4.1. Pressure: 4/ ..... kPa or characteristic diagram: .....
- 4.2.5. Ignition
- 4.2.5.1. Make(s):.....
- 4.2.5.2. Type(s): .....
- 4.2.5.3. Working principle: .....
- 4.2.5.4. Ignition advance curve 4/: .....
- 4.2.5.5. Static ignition timing 4/ ..... degrees before TDC
- 4.2.5.6. Contact-point gap 4/: .....
- 4.2.5.7. Dwell-angle 4/: .....
- 4.2.5.8. Spark plugs
- 4.2.5.8.1. Make:.....
- 4.2.5.8.2. Type:.....
- 4.2.5.8.3. Spark plug gap setting: ..... mm
- 4.2.5.9. Ignition coil
- 4.2.5.9.1. Make:.....
- 4.2.5.9.2. Type:.....
- 4.2.5.10. Ignition condenser
- 4.2.5.10.1. Make:.....
- 4.2.5.10.2. Type:.....
- 4.2.6. Cooling system: liquid/air 1/
- 4.2.7. Intake system:
- 4.2.7.1. Pressure charger: yes/no 1/
- 4.2.7.1.1. Make(s):.....
- 4.2.7.1.2. Type(s): .....
- 4.2.7.1.3. Description of the system (maximum charge pressure: ..... kPa, waste-gate)
- 4.2.7.2. Inter-cooler: yes/no 1/
- 4.2.7.3. Description and drawings of inlet pipes and their accessories (plenum chamber, heating device, additional air intakes, etc.): .....
- 4.2.7.3.1. Intake manifold description (drawings and/or photographs): .....
- 4.2.7.3.2. Air filter, drawings: ..... , or
- 4.2.7.3.2.1. Make(s):.....
- 4.2.7.3.2.2. Type(s): .....
- 4.2.7.3.3. Intake silencer, drawings: ..... , or
- 4.2.7.3.3.1. Make(s):.....
- 4.2.7.3.3.2. Type(s): .....

- 4.2.8. Exhaust system
- 4.2.8.1. Description and drawings of the exhaust system: .....
- 4.2.9. Valve timing or equivalent data:
- 4.2.9.1. Maximum lift of valves, angles of opening and closing, or timing details of alternative distribution systems, in relation to dead centres:.....
- 4.2.9.2. Reference and/or setting ranges: 1/ .....
- 4.2.10. Lubricant used:
- 4.2.10.1. Make:.....
- 4.2.10.2. Type:.....
- 4.2.11. Measures taken against air pollution:
- 4.2.11.1. Device for recycling crankcase gases (description and drawings):.....
- 4.2.11.2. Additional pollution control devices (if any, and if not covered by another heading: .....
- 4.2.11.2.1. Catalytic converter: yes/no 1/
- 4.2.11.2.1.1. Number of catalytic converters and elements: .....
- 4.2.11.2.1.2. Dimensions and shape of the catalytic converter(s) (volume, ...): .....
- 4.2.11.2.1.3. Type of catalytic action: .....
- 4.2.11.2.1.4. Total charge of precious metal: .....
- 4.2.11.2.1.5. Relative concentration: .....
- 4.2.11.2.1.6. Substrate (structure and material): .....
- 4.2.11.2.1.7. Cell density:.....
- 4.2.11.2.1.8. Type of casing for catalytic converter(s):.....
- 4.2.11.2.1.9. Positioning of the catalytic converter(s) (place and reference distances in the exhaust system): .....
- 4.2.11.2.1.10. Oxygen sensor: type .....
- 4.2.11.2.1.10.1. Location of oxygen sensor: .....
- 4.2.11.2.1.10.2. Control range of oxygen sensor: .....
- 4.2.11.2.2. Air injection: yes/no 1/
- 4.2.11.2.2.1. Type (pulse air, air pump,...): .....
- 4.2.11.2.3. Exhaust gas recirculation (EGR): yes/no 1/
- 4.2.11.2.3.1. Characteristics (flow,...): .....
- 4.2.11.2.4. Evaporative emission control system.  
 Complete detailed description of the devices and their state of tune: .....
- Drawing of the evaporative control system: .....
- Drawing of the carbon canister: .....
- Drawing of the fuel tank with indication of capacity and material: .....
- 4.2.11.2.5. Particulate trap: yes/no 1/
- 4.2.11.2.5.1. Dimensions and shape of the particulate trap (capacity):.....
- 4.2.11.2.5.2. Type of particulate trap and design: .....
- 4.2.11.2.5.3. Location of the particulate trap (reference distances in the exhaust system): ....
- 4.2.11.2.6. Other systems (description and working principle): .....

- 4.3. Traction battery / energy storage device
- 4.3.1. Description of the energy storage device: (battery, capacitor, flywheel/generator...)
- 4.3.1.1. Make: .....
- 4.3.1.2. Type: .....
- 4.3.1.3. Identification number: .....
- 4.3.1.4. Kind of electrochemical couple: .....
- 4.3.1.5. Energy: .....(for battery: voltage and capacity Ah in 2 h, for capacitor: J,...)
- 4.3.1.6. Charger: on board/ external/ without 1/
- 4.4. Electric machines (describe each type of electric machine separately)
- 4.4.1. Make: .....
- 4.4.2. Type: .....
- 4.4.3. Primary use: traction motor / generator 1/
- 4.4.3.1. When used as traction motor: monomotor/ multimotors 1/ (number): .....
- 4.4.4. Maximum power: ..... kW
- 4.4.5. Working principle:
- 4.4.5.1. Direct current/ alternating current /number of phases 1/:.....
- 4.4.5.2. separate excitation / series / compound 1/
- 4.4.5.3. synchronous / asynchronous 1/
- 4.5. Power train control unit
- 4.5.1. Make: .....
- 4.5.2. Type: .....
- 4.5.3. Identification number: .....
- 4.6. Power controller
- 4.6.1. Make: .....
- 4.6.2. Type: .....
- 4.6.3. Identification number: .....
- 4.7. Transmission
- 4.7.1. Clutch (type):.....
- 4.7.1.1. Maximum torque conversion:.....
- 4.7.2. Gearbox:
- 4.7.2.1. Type:.....
- 4.7.2.2. Location relative to the engine: .....
- 4.7.2.3. Method of control:.....

4.7.3. Gear ratios

	Gearbox ratios	Final drive ratios	Total ratios
Maximum for CVT (*)			
1			
2			
3			
4, 5, others			
Minimum for CVT (*)			
Reverse			

(\*) CVT - Continuously variable transmission

5. SUSPENSION

5.1. Tyres and wheels

5.1.1. Tyre/wheel combination(s) (for tyres indicate size designation, minimum load-capacity index, minimum speed category symbol; for wheels, indicate rim size(s) and off-set(s):

5.1.1.1. Axles

5.1.1.1.1. Axle 1: .....

5.1.1.1.2. Axle 2: .....

5.1.1.1.3. Axle 3: .....

5.1.1.1.4. Axle 4: etc. ....

5.1.2. Upper and lower limit of rolling circumference:

5.1.2.1. Axles

5.1.2.1.1. Axle 1: .....

5.1.2.1.2. Axle 2: .....

5.1.2.1.3. Axle 3: .....

5.1.2.1.4. Axle 4: etc. ....

5.1.3. Tyre pressure(s) as recommended by the manufacturer: ..... kPa

6. BODYWORK

6.1. Seats:

6.1.1. Number of seats:

7. INERTIA MASS

- 7.1. Equivalent inertia mass of complete front axle: .....
- 7.2. Equivalent inertia mass of complete rear axle: .....

- 
- 1/ Strike out what does not apply.
- 2/ This value must be rounded to the nearest tenth of a millimetre.
- 3/ This value must be calculated with  $\pi = 3.1416$  and rounded to the nearest  $\text{cm}^3$ .
- 4/ Specify the tolerance.



Annex 4

COMMUNICATION 5/

(Maximum format: A4 (210 x 297 mm))



issued by :

Name of administration:

.....  
.....  
.....

concerning: 2/

- APPROVAL GRANTED
- APPROVAL EXTENDED
- APPROVAL REFUSED
- APPROVAL WITHDRAWN
- PRODUCTION DEFINITELY DISCONTINUED

of a vehicle type pursuant to Regulation No. 101

Approval No: .....

Extension No: .....

1. Trade name or mark of the vehicle: .....
2. Vehicle type: .....
3. Vehicle category: .....
4. Manufacturer's name and address: .....
5. If applicable, name and address of manufacturer's representative: .....
  
6. Description of the vehicle: .....
- 6.1. Mass of the vehicle in running order: .....
- 6.2. Maximum permitted mass: .....
- 6.3. Type of body:
  - 6.3.1. For M<sub>1</sub>: saloon, hatchback, station wagon, coupé, convertible, multipurpose vehicle 2/ 6/

5/ For vehicles that are approved within a family according to paragraph 7.6., this communication must be supplied for each individual member of the vehicle family.

6/ As defined in Annex 7 to the Consolidated Resolution on the Construction of Vehicles (R.E.3) (TRANS/WP.29/78/Rev.1/Amend.2).

- 6.3.2. For N<sub>1</sub>: lorry, van. 2/
- 6.4. Drive: front-wheel / rear-wheel / four-wheel 2/
- 6.5. Pure electric vehicle: yes/no 2/
- 6.6. Hybrid electric vehicle: yes/no 2/
- 6.6.1. Category of Hybrid Electric vehicle: Off Vehicle Charging/Not Off Vehicle charging 2/
- 6.6.2. Operating mode switch: with/without 2/
  
- 6.7. Internal combustion engine.
  - 6.7.1. Cylinder capacity: .....
  - 6.7.2. Fuel feed: carburettor / injection 2/
  - 6.7.3. Fuel recommended by the manufacturer: .....
  - 6.7.4. In the case of LPG/NG 2/ the reference fuel used for the test (e.g. G20, G25): .....
  - 6.7.5. Maximum engine power: ..... kW at: ..... min<sup>-1</sup>
  - 6.7.6. Super-charger: yes / no 2/
  - 6.7.7. Ignition: compression ignition / positive ignition (mechanical or electronic) 2/
  - 6.8. Power train (for pure electric vehicle or hybrid electric vehicle) 2/
    - 6.8.1.1. Maximum net power: ..... kW, at: ..... to ..... min<sup>-1</sup>
    - 6.8.1.2. Maximum thirty minutes power: .....kW
    - 6.8.1.3. Working principle:.....
  - 6.9. Traction battery (for pure electric vehicle or hybrid electric vehicle)
    - 6.9.1. Nominal voltage: .....V
    - 6.9.2. Capacity (2 h rate): .....Ah
    - 6.9.3. Battery maximum thirty minutes power:.....kW
    - 6.9.4. Charger: on board/external 2/
  - 6.10. Transmission.
    - 6.10.1. Type of gearbox: manual / automatic / variable transmission 2/
    - 6.10.2. Number of gears: .....
    - 6.10.3. Overall gear ratios (including tyre tread circumference under load): road speeds (km/h) per 1,000 engine speed (min<sup>-1</sup>):
      - First gear: .....
      - Second gear: .....
      - Third gear: .....
      - Fourth gear: .....
      - Fifth gear: .....
      - Overdrive: .....
    - 6.10.4. Final drive ratio: .....
  - 6.11. Tyres.
    - Type: .....
    - Dimensions: .....
    - Rolling circumference under load: .....

7. Type-approval values
  - 7.1. Internal combustion engine vehicle and Not Externally Chargeable (NOVC) Hybrid Electric Vehicle 2/
    - 7.1.1. CO<sub>2</sub> mass emissions
      - 7.1.1.1. Urban conditions: ..... g/km
      - 7.1.1.2. Extra-urban conditions: ..... g/km
      - 7.1.1.3. Combined: ..... g/km
    - 7.1.2. Fuel consumption. 3/ 4/
      - 7.1.2.1. Fuel consumption (urban conditions): ..... l/100 km
      - 7.1.2.2. Fuel consumption (extra-urban conditions): ..... l/100 km
      - 7.1.2.3. Fuel consumption (combined): ..... l/100 km
    - 7.1.3. For vehicles powered by an internal combustion engine only which are equipped with periodically regenerating systems as defined in paragraph 2.19. of this Regulation, the test results must be multiplied by the factor K<sub>i</sub> obtained from Annex 10.
  - 7.2. Pure electric vehicles 2/
    - 7.2.1. Measurement of electric energy consumption.
      - 7.2.1.1. Electric energy consumption: ..... Wh/km
      - 7.2.1.2. Total time out of tolerance for the conduct of the cycle:..... sec
    - 7.2.2. Measurement of range:
      - 7.2.2.1. Electric Range: ..... km
      - 7.2.2.2. Total time out of tolerance for the conduct of the cycle:..... sec
  - 7.3. Externally chargeable (OVC) Hybrid Electric Vehicle:
    - 7.3.1. CO<sub>2</sub> mass emission (Condition A, combined 5/): ..... g/ km
    - 7.3.2. CO<sub>2</sub> mass emission (Condition B, combined 5/):..... g/ km
    - 7.3.3. CO<sub>2</sub> mass emission (weighted, combined 5/):.....g/ km
    - 7.3.4. Fuel consumption (Condition A ,combined 5/):.....l/100 km
    - 7.3.5. Fuel consumption (Condition B ,combined 5/): .....l/100 km
    - 7.3.6. Fuel consumption (weighted, combined 5/): .....l/100 km
    - 7.3.7. Electric energy consumption (Condition A, combined 5/):..... Wh/ km
    - 7.3.8. Electric energy consumption (Condition B, combined 5/):..... Wh/ km
    - 7.3.9. Electric energy consumption (weighted and combined 5/): ..... Wh/ km
    - 7.3.10. OVC range:..... km
8. Vehicle submitted for approval on: .....
9. Technical service responsible for conducting approval tests: .....
10. Number of report issued by that service: .....
11. Date of report issued by that service: .....
12. Approval granted / extended / refused / withdrawn 2/
13. Reasons for extension (if applicable): .....
14. Remarks: .....
15. Positioning of approval mark on the vehicle: .....
16. Place: .....
17. Date: .....

18. Signature: .....

- 1/ Distinguishing number of the country which has granted/extended/refused/withdrawn approval (see approval provisions in this Regulation).
- 2/ Strike out what does not apply.
- 3/ Repeat for petrol and gaseous fuel in the case of a vehicle that can run either on petrol or on a gaseous fuel.
- 4/ For vehicles fuelled with NG the unit l/100 km is replaced by m<sup>3</sup>/km.
- 5/ Measured over the combined cycle, i.e. Part One (urban) and Part Two (extra-urban) together.


Annex 5

ARRANGEMENTS OF APPROVAL MARKS

Model A

(See paragraph 4.4. of this Regulation)

a = 8 mm min.

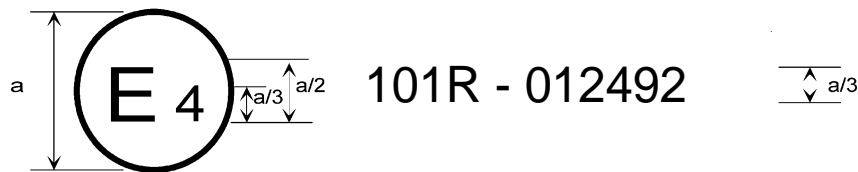


The above approval mark affixed to a vehicle shows that the vehicle type concerned has been approved in the Netherlands (E4) with regard to the measurement of emissions of CO<sub>2</sub> and fuel consumption or to the measurement of electric energy consumption and electric range pursuant to Regulation No. 101 and under approval number 012492. The first two digits of the approval number indicate that the approval was granted according to the requirements of Regulation No. 101 as amended by the 01 series of amendments.

Model B

(See paragraph 4.5. of this Regulation)

a = 8 mm min.

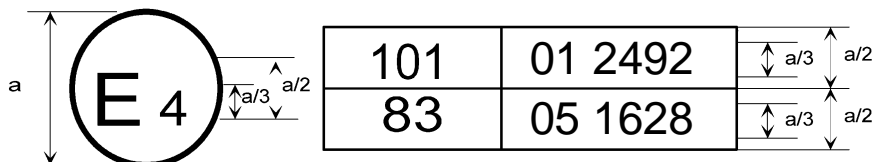

The above approval mark affixed to a vehicle shows that the vehicle type concerned has been approved in the Netherlands (E4) pursuant to Regulations Nos. 101 and 83\*. The first two digits of the approval numbers indicate that, at the dates when the respective approvals were given, Regulation No. 101 with the 01 series of amendments incorporated and Regulation No. 83 already included the 05 series of amendments.

\* The second number is given merely as an example

Annex 6

METHOD OF MEASURING EMISSIONS OF CARBON DIOXIDE AND  
FUEL CONSUMPTION OF VEHICLES POWERED BY AN  
INTERNAL COMBUSTION ENGINE ONLY

1. SPECIFICATION OF THE TEST

- 1.1. Emissions of carbon dioxide (CO<sub>2</sub>) and fuel consumption of vehicles powered by an internal combustion engine only shall be determined according to the procedure for the Type I test as defined in Annex 4a of Regulation No. 83 in force at the time of the approval of the vehicle.
- 1.2. Emissions of carbon dioxide (CO<sub>2</sub>) and fuel consumption shall be determined separately for the Part One (urban driving) and the Part Two (extra-urban driving) of the specified driving cycle.
- 1.3. In addition to the conditions specified in Annex 4a of Regulation No. 83 in force at the time of the approval of the vehicle, the following conditions apply:
  - 1.3.1. Only the equipment necessary for the operation of the vehicle during the test shall be in use. If there is a manually controlled device for the engine intake air temperature, it shall be in the position prescribed by the manufacturer for the ambient temperature at which the test is performed. In general, the auxiliary devices required for the normal operation of the vehicle shall be in use.
  - 1.3.2. If the radiator fan is temperature controlled, it shall be in the condition of normal operation on the vehicle. The passenger compartment heating system shall be switched off, as shall any air conditioning system, but such systems compressor shall be functioning normally.
  - 1.3.3. If a super-charger is fitted, it shall be in the normal operating condition for the test conditions.
  - 1.3.4. All the lubricants shall be those recommended by the manufacturer of the vehicle and shall be specified in the test report.
  - 1.3.5. The widest tyres shall be chosen. If there are more than three tyre sizes, the widest minus one shall be chosen.

1.4. Calculation of CO<sub>2</sub> and fuel consumption values

1.4.1. The mass emission of CO<sub>2</sub>, expressed in g/km, shall be calculated from the measurement results using the provisions defined in paragraph 6.6. of Annex 4a of Regulation No. 83 in force at the time of the approval of the vehicle.

1.4.1.1. For this calculation the density of CO<sub>2</sub> shall be  $Q_{CO_2} = 1.964$  g/litre.

1.4.2. The fuel consumption values shall be calculated from the emissions of hydrocarbons, carbon monoxide, and carbon dioxide determined from the measurement results using the provisions defined in paragraph 6.6. of Annex 4a of Regulation No. 83 in force at the time of the approval of the vehicle.

1.4.3. The fuel consumption, expressed in litres per 100 km (in the case of petrol, LPG, ethanol (E85) and diesel) or in m<sup>3</sup> per 100 km (in the case of NG/biomethane) is calculated by means of the following formulae:

(a) for vehicles with a positive ignition engine fuelled with petrol (E5):

$$FC = (0.118/D) \cdot [(0.848 \cdot HC) + (0.429 \cdot CO) + (0.273 \cdot CO_2)];$$

(b) for vehicles with a positive ignition engine fuelled with LPG:

$$FC_{norm} = (0.1212 / 0.538) \cdot [(0.825 \cdot HC) + (0.429 \cdot CO) + (0.273 \cdot CO_2)].$$

If the composition of the fuel used for the test differs from the composition that is assumed for the calculation of the normalized consumption, on the manufacturer's request a correction factor cf may be applied, as follows:

$$FC_{norm} = (0.1212 / 0.538) \cdot (cf) \cdot [(0.825 \cdot HC) + (0.429 \cdot CO) + (0.273 \cdot CO_2)].$$

The correction factor cf, which may be applied, is determined as follows:

$$cf = 0.825 + 0.0693 \cdot n_{actual};$$

where:

$n_{actual}$  = the actual H/C ratio of the fuel used;

(c) for vehicles with a positive ignition engine fuelled with NG/biomethane:

$$FC_{norm} = (0.1336 / 0.654) \cdot [(0.749 \cdot HC) + (0.429 \cdot CO) + (0.273 \cdot CO_2)];$$

(d) for vehicles with a compression ignition engine fuelled with diesel (B5):

$$FC = (0.116/D) \cdot [(0.861 \cdot HC) + (0.429 \cdot CO) + (0.273 \cdot CO_2)];$$

(e) for vehicles with a positive ignition engine fuelled with ethanol (E85):

$$FC = (0.1742/D) \cdot [(0.574 \cdot HC) + (0.429 \cdot CO) + (0.273 \cdot CO_2)].$$

In these formulae:

- FC = the fuel consumption in litres per 100 km (in the case of petrol, LPG, diesel ethanol or biodiesel) or in m<sup>3</sup> per 100 km (in the case of natural gas);
- HC = the measured emission of hydrocarbons in g/km;
- CO = the measured emission of carbon monoxide in g/km;
- CO<sub>2</sub> = the measured emission of carbon dioxide in g/km;
- D = the density of the test fuel.

In the case of gaseous fuels this is the density at 15 °C



Annex 7

METHOD OF MEASURING THE ELECTRIC ENERGY CONSUMPTION  
OF VEHICLES POWERED BY AN ELECTRIC POWER TRAIN ONLY

1. TEST SEQUENCE

1.1. Composition

The test sequence is composed of two parts (see figure 1):

- (a) an urban cycle made of four elementary urban cycles;
- (b) an extra-urban cycle.

In case of a manual gear box with several gears, the operator changes the gear according to the manufacturer's specifications.

If the vehicle has several driving modes, which may be selected by the driver, the operator shall select the one to best match the target curve.

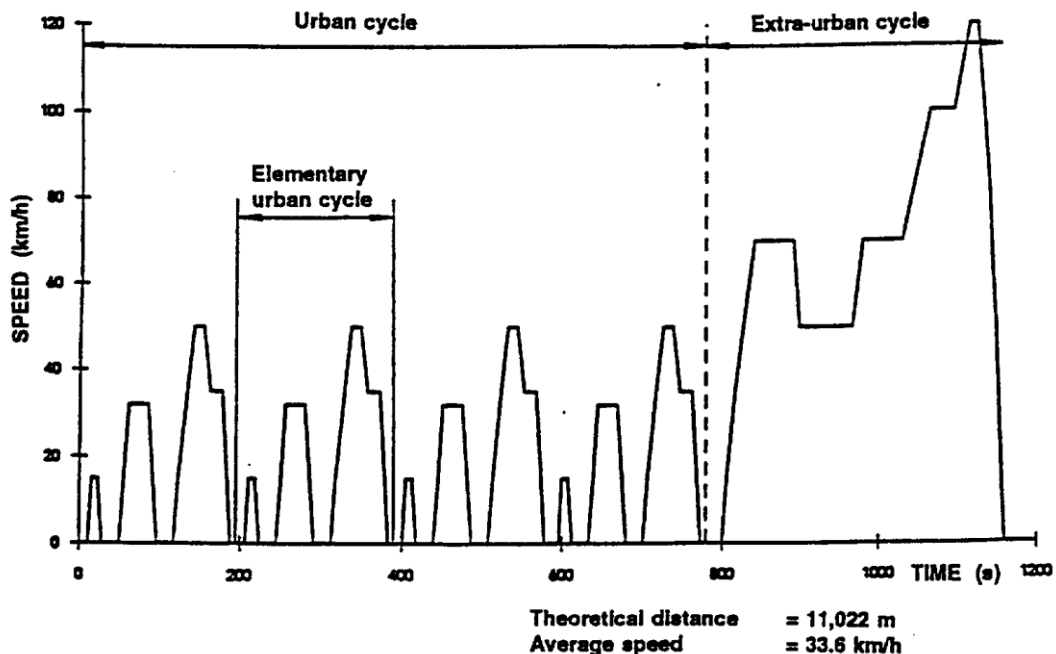


Figure 1  
Test sequence - M1 and N1 categories of vehicles

1.2. Urban cycle

The urban cycle is composed of four elementary cycles of 195 seconds each and lasts 780 seconds in total.

Description of the elementary urban cycle is given in figure 2 and table 1.

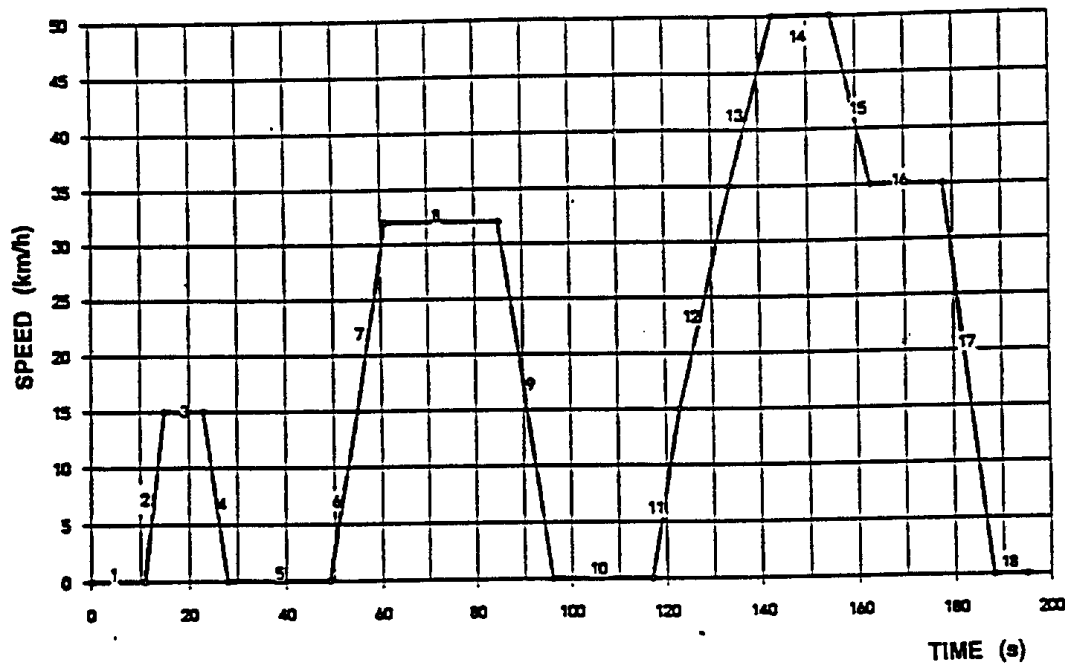


Figure 2  
 Elementary urban cycle (195 seconds)

**Table 1**  
Elementary urban cycle

Operation N°	Operation type	ELEMENTARY URBAN CYCLE			Operation duration (s)	Mode duration (s)	Total time (s)
		Mode N°	Acceleration (m/s <sup>2</sup> )	Speed (km/h)			
1	Stop	1	0.00	0	11	11	11
2	Acceleration	2	1.04	0-15	4	4	15
3	Constant speed	3	0.00	15	8	8	23
4	Deceleration	4	-0.83	15-0	5	5	28
5	Stop	5	0.00	0	21	21	49
6	Acceleration	6	0.69	0-15	6	12	55
7	Acceleration		0.79	15-32	6		61
8	Constant speed	7	0.00	32	24	24	85
9	Deceleration	8	-0.81	32-0	11	11	96
10	Stop	9	0.00	0	21	21	117
11	Acceleration	10	0.69	0-15	6	26	123
12	Acceleration		0.51	15-35	11		134
13	Acceleration		0.46	35-50	9		143
14	Constant speed	11	0.00	50	12	12	155
15	Deceleration	12	-0.52	50-35	8	8	163
16	Constant speed	13	0.00	35	15	15	178
17	Deceleration	14	-0.97	35-0	10	10	188
18	Stop	15	0.00	0	7	7	195

Generalities	in time (s)	in percentage
Stop	60	30.77
Acceleration	42	21.54
Constant speed	59	30.26
Deceleration	34	17.44
Total	195	100.00


  

Average speed (km/h)	18.77
Working time (s)	195
Theoretical distance by elementary urban cycle (m)	1017
Theoretical distance for four elementary urban cycles (m)	4067

1.3. Extra-urban cycle

The description of the extra-urban cycle is given in figure 3 and table 2.

Figure 3  
 Extra-urban cycle (400 seconds)

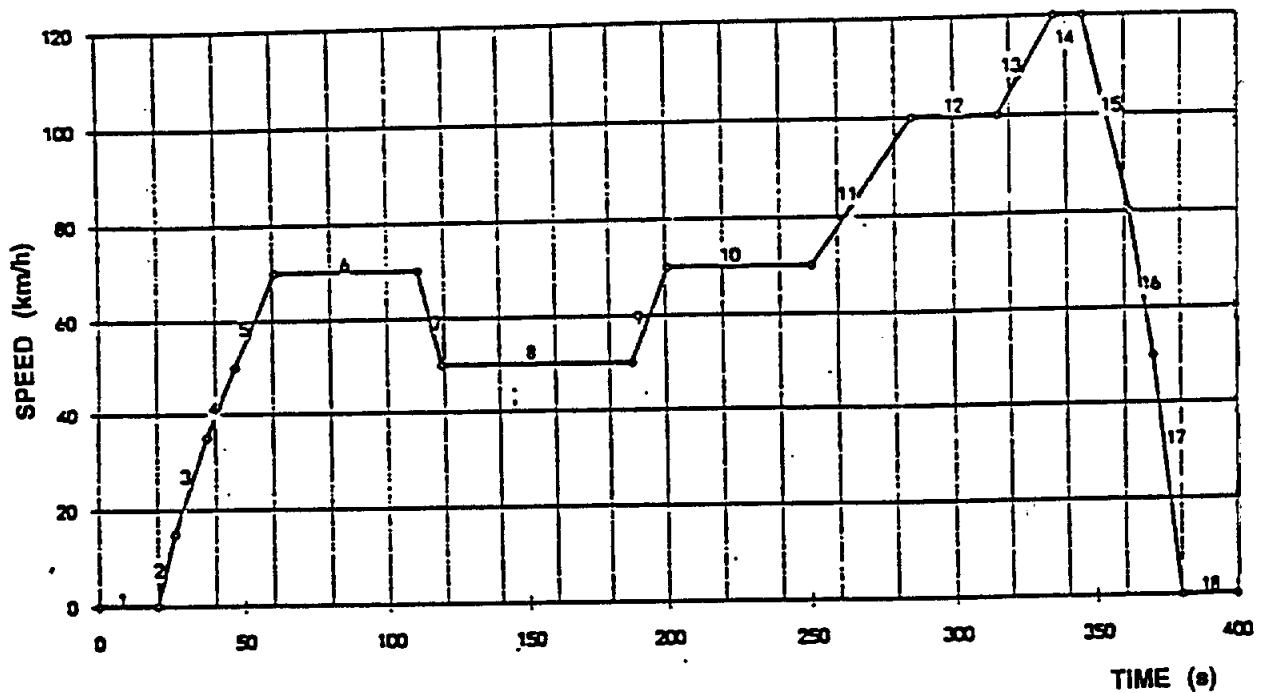

Note: The procedure to be adopted when the vehicle failed to meet the speed requirements of this curve is detailed in item 1.4.

Table 2

Operation N°	Operation type	EXTRA-URBAN CYCLE			Operation duration (s)	Mode duration (s)	Total time (s)
		Mode N°	Acceler-ation (m/s <sup>2</sup> )	Speed (km/h)			
1	Stop	1	0.00	0	20	20	20
2	Acceleration	2	0.69	0-15	6	41	26
3	Acceleration		0.51	15-35	11		37
4	Acceleration		0.42	35-50	10		47
5	Acceleration		0.40	50-70	14		61
6	Constant speed	3	0.00	70	50	50	111
7	Deceleration	4	-0.69	70-50	8	8	119
8	Constant speed	5	0.00	50	69	69	188
9	Acceleration	6	0.43	50-70	13	13	201
10	Constant speed	7	0.00	70	50	50	251
11	Acceleration	8	0.24	70-100	35	35	286
12	Constant speed	9	0.00	100	30	30	316
13	Acceleration	10	0.28	100-120	20	20	336
14	Constant speed	11	0.00	120	10	10	346
15	Deceleration	12	-0.69	120-80	16	34	362
16	Deceleration		-1.04	80-50	8		370
17	Deceleration		-1.39	50-0	10		380
18	Stop	13	0.00	0	20	20	400

Generalities	in time (s)	In Percentage
Stop	40	10.00
Acceleration	109	27.25
Constant speed	209	52.25
Deceleration	42	10.50
Total	400	100.00


Average speed (km/h)	62.60
Working time (s)	400
Theoretical distance (m)	6956

1.4. Tolerance

Tolerances are given in figure 4.

Figure 4

Speed tolerance

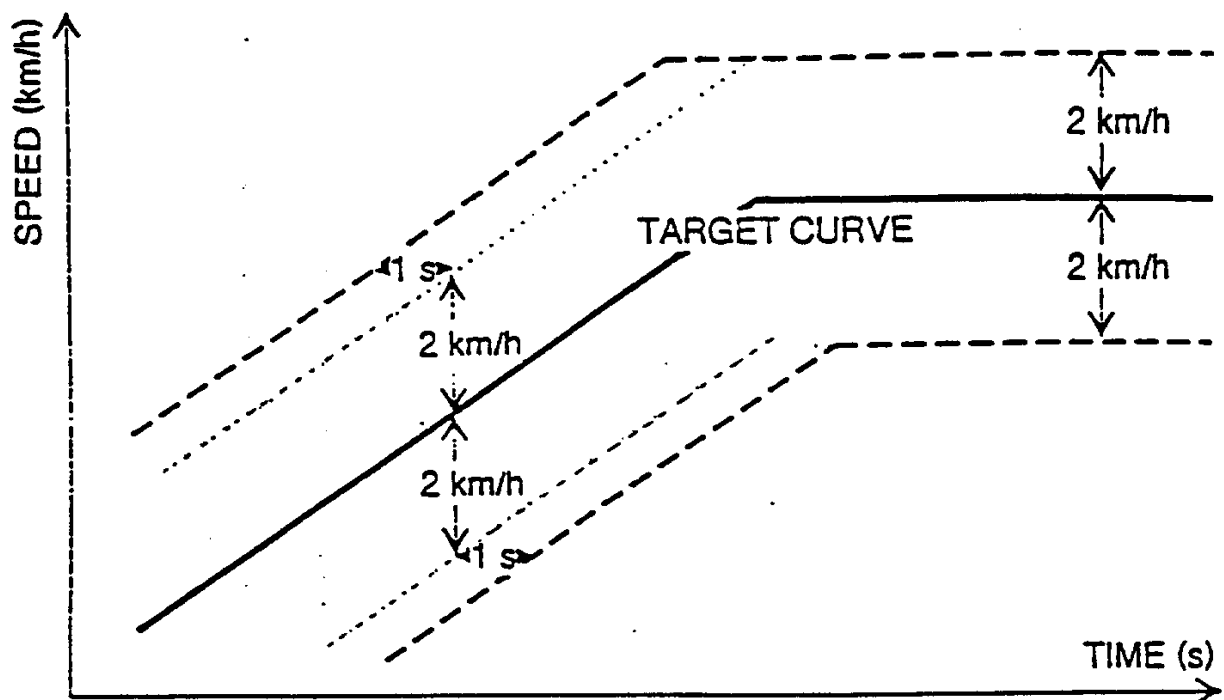

Tolerances on speed ( $\pm 2$  km/h) and on time ( $\pm 1$  s) are geometrically combined at each point as represented in figure 4.

Below 50 km/h, deviations beyond this tolerance are permitted as follows:

- (a) at gear changes for a duration less than 5 seconds,
- (b) and up to five times per hour at other times, for a duration less than 5 seconds each.

The total time out of tolerance has to be mentioned in the test report.

Over 50 km/h, it is accepted to go beyond tolerances provided the accelerator pedal is fully depressed.

2. TEST METHOD

2.1. Principle

The test method described hereafter allows the electric energy consumption, expressed in Wh/km, to be measured:

2.2. Parameters, units and accuracy of measurements

Parameter	Units	Accuracy	Resolution
Time	s	± 0.1 s	0.1 s
Distance	m	± 0.1 per cent	1 m
Temperature	°C	± 1 °C	1 °C
Speed	km/h	± 1 per cent	0.2 km/h
Mass	kg	± 0.5 per cent	1 kg
Energy	Wh	± 0.2 per cent	Class 0.2 s according to IEC 687

IEC = International Electrotechnical Commission

2.3. Vehicle

2.3.1. Condition of the vehicle

- 2.3.1.1. The vehicle tyres shall be inflated to the pressure specified by the vehicle manufacturer when the tyres are at the ambient temperature.
- 2.3.1.2. The viscosity of the oils for the mechanical moving parts shall conform to the specification of the vehicle manufacturer.
- 2.3.1.3. The lighting and light-signalling and auxiliary devices shall be off, except those required for testing and usual day-time operation of the vehicle.
- 2.3.1.4. All energy storage systems available for other than traction purposes (electric, hydraulic, pneumatic, etc.) shall be charged up to their maximum level specified by the manufacturer.
- 2.3.1.5. If the batteries are operated above the ambient temperature, the operator shall follow the procedure recommended by the car manufacturer in order to keep the temperature of the battery in the normal operating range.

The manufacturer's agent shall be in a position to attest that the thermal management system of the battery is neither disabled nor reduced.

- 2.3.1.6. The vehicle must have undergone at least 300 km during the seven days before the test with those batteries that are installed in the test vehicle.

2.4. Operation mode

All the tests are conducted at a temperature of between 20 °C and 30 °C.

The test method includes the four following steps:

- (a) Initial charge of the battery;
- (b) Application twice of the cycle made of four elementary urban cycles and an extra-urban cycle;
- (c) Charging the battery;
- (d) Calculation of the electric energy consumption.

Between the steps, if the vehicle shall move, it is pushed to the following test area (without regenerative recharging).

2.4.1. Initial charge of the battery

Charging the battery consists of the following procedures:

2.4.1.1. Discharge of the battery

The procedure starts with the discharge of the battery of the vehicle while driving (on the test track, on a chassis dynamometer, etc.) at a steady speed of 70 per cent  $\pm$  5 per cent from the maximum thirty minutes speed of the vehicle.

Stopping the discharge occurs:

- (a) when the vehicle is not able to run at 65 per cent of the maximum thirty minutes speed;
- (b) or when an indication to stop the vehicle is given to the driver by the standard on-board instrumentation, or
- (c) after covering the distance of 100 km.

2.4.1.2. Application of a normal overnight charge

The battery shall be charged according to the following procedure.



#### 2.4.1.2.1. Normal overnight charge procedure

The charge is carried out:

- (a) with the on-board charger if fitted,
- (b) with an external charger recommended by the manufacturer, using the charging pattern prescribed for normal charging,
- (c) in an ambient temperature comprised between 20 °C and 30 °C.

This procedure excludes all types of special charges that could be automatically or manually initiated like, for instance, the equalisation charges or the servicing charges.

The car manufacturer shall declare that during the test, a special charge procedure has not occurred.

#### 2.4.1.2.2. End of charge criteria

The end of charge criteria corresponds to a charging time of 12 hours except if a clear indication is given to the driver by the standard instrumentation that the battery is not yet fully charged.

In this case,

$$\text{the maximum time is} = \frac{3 \cdot \text{claimed battery capacity (Wh)}}{\text{mains power supply (W)}}$$

#### 2.4.1.2.3. Fully charged battery

Battery having been charged according to overnight charge procedure until the end of charge criteria.

#### 2.4.2. Application of the cycle and measurement of the distance

The end of charging time  $t_0$  (plug off) is reported.

The chassis dynamometer shall be set with the method described in appendix 1 to this annex.

Starting within 4 hours from  $t_0$ , the cycle made of four elementary urban cycles and an extra-urban cycle is run twice on a chassis dynamometer (test distance: 22 km, test duration: 40 minutes).

At the end, the measure  $D_{test}$  of the covered distance in km is recorded.

2.4.3. Charge of the battery

The vehicle shall be connected to the mains within the 30 minutes after the conclusion of the cycle made of four elementary urban cycles and an extra-urban cycle, carried out twice.

The vehicle shall be charged according to normal overnight charge procedure (see paragraph 2.4.1.2. to this annex).

The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy  $E$  delivered from the mains, as well as its duration.

Charging is stopped after 24 hours from the previous end of charging time ( $t_0$ ).

Note:

In case of a mains power cut, the 24 hours period will be extended accordingly to the cut duration. Validity of the charge will be discussed between the technical services of the approval laboratory and the vehicle's manufacturer.

2.4.4. Electric energy consumption calculation

Energy  $E$  in Wh and charging time measurements are recorded in the test report.

The electric energy consumption  $c$  is defined by the formula:

$$c = \frac{E}{D_{test}} \quad (\text{expressed in Wh/km and rounded to the nearest whole number})$$

where  $D_{test}$  is the distance covered during the test (km).

Annex 7 - Appendix

DETERMINATION OF THE TOTAL ROAD LOAD POWER  
OF A VEHICLE POWERED BY AN ELECTRIC POWER TRAIN ONLY,  
AND CALIBRATION OF THE DYNAMOMETER

1. INTRODUCTION

The purpose of this appendix is to define the method of measuring the total road load power of a vehicle with a statistical accuracy of  $\pm 4$  per cent at a constant speed and to reproduce this measured road load power on a dynamometer with an accuracy of  $\pm 5$  per cent.

2. CHARACTERISTICS OF THE TRACK

The test road layout shall be level, straight and free of obstacles or wind barriers which adversely affect the variability of road load measurement.

The test road longitudinal slope shall not exceed  $\pm 2$  per cent. This slope is defined as the ratio of the difference in elevation between both ends of the test road and its overall length. In addition, the local inclination between any two points 3 m apart shall not deviate by more than  $\pm 0.5$  per cent from this longitudinal slope.

The maximum cross-sectional camber of the test road shall be 1.5 per cent or less.

3. ATMOSPHERIC CONDITIONS

3.1. Wind

Testing shall be performed at wind speeds averaging less than 3 m/s with peak speeds less than 5 m/s. In addition, the vector component of the wind speed across the test track must be less than 2 m/s. Wind velocity shall be measured at 0.7 m above the track surface.

3.2. Humidity

The track shall be dry.

3.3. Reference conditions

Barometric pressure  $H_0 = 100$  kPa  
Temperature  $T_0 = 293$  K (20 °C)  
Air density  $d_0 = 1.189$  kg/m<sup>3</sup>

3.3.1. Air density

3.3.1.1. The air density during the test, calculated as described in paragraph 3.3.1.2. below, shall not differ by more than 7.5 per cent from the air density under the reference conditions.

3.3.1.2. The air density shall be calculated by the formula:

$$d_T = d_0 \cdot \frac{H_T}{H_0} \cdot \frac{T_0}{T_T}$$

where:

$d_T$  is the air density during the test ( $\text{kg/m}^3$ )

$d_0$  is the air density at reference conditions ( $\text{kg/m}^3$ )

$H_T$  is the total barometric pressure during the test (kPa)

$T_T$  is absolute temperature during the test (K).

3.3.2. Ambient conditions

3.3.2.1. The ambient temperature shall be between 5 °C (278 K) and 35 °C (308 K) and the barometric pressure between 91 kPa and 104 kPa. The relative humidity shall be less than 95 per cent.

3.3.2.2. However, with the manufacturer's agreement, the tests may be made at lower ambient temperatures down to 1 °C. In this case the correction factor calculated for 5 °C should be used.

4. PREPARATION OF THE VEHICLE

4.1. Running-in

The vehicle shall be in normal running order and adjustment after having been run in for at least 300 km. The tyres shall be run in at the same time as the vehicle or shall have a tread depth within 90 and 50 per cent of the initial tread depth.

4.2. Checks

The following checks shall be made in accordance with the manufacturer's specifications for the use considered: wheels, wheel rims, tyres (make, type, pressure), front axle geometry, brake adjustment (elimination of parasitic drag), lubrication of front and rear axles, adjustment of the suspension and vehicle ground clearance, etc. Check that during freewheeling, there is no electrical braking.

4.3. Preparation for the test

- 4.3.1. The vehicle shall be loaded to its test mass including driver and measurement equipments, spread in a uniform way in the loading areas.
- 4.3.2. The windows of the vehicle shall be closed. Any covers for air conditioning systems, headlamps, etc. shall be closed.
- 4.3.3. The vehicle shall be clean.
- 4.3.4. Immediately before the test, the vehicle shall be brought to the normal running temperature in an appropriate manner.

5. SPECIFIED SPEED V

The specified speed is required for determining the running resistance at the reference speed from the running resistance curve. To determine the running resistance as a function of vehicle speed in the vicinity of the reference speed  $V_o$ , running resistances shall be measured at the specified speed V. At least four to five points indicating the specified speeds, along with the reference speeds, are desired to be measured.

Table 1 shows the specified speeds in accordance with the category of the vehicle. The asterisk \* indicates the reference speed in the table.

Table 1

Category V max.	Specified speeds (km/h)					
> 130	120**/	100	80*	60	40	20
130 – 100	90	80*	60	40	20	-
100 – 70	60	50*	40	30	20	-
< 70	50**	40*	30	20	-	-
**/ if it could be reached by the vehicle.						

6. ENERGY VARIATION DURING COAST-DOWN

6.1. Total road load power determination

6.1.1. Measurement equipment and accuracy

The margin of measurement error shall be less than 0.1 second for time and less than  $\pm 0.5$  km/h for speed.

6.1.2. Test procedure

6.1.2.1. Accelerate the vehicle to a speed of 5 km/h greater than the speed at which test measurement begins.

6.1.2.2. Put the gearbox to neutral, or disconnect the power supply.

6.1.2.3. Measure the time  $t_1$  taken by the vehicle to decelerate from:

$$V_2 = V + \Delta V \text{ km/h to } V_1 = V - \Delta V \text{ km/h}$$

where:

$$\Delta V \leq 5 \text{ km/h for nominal speed } \leq 50 \text{ km/h}$$

$$\Delta V \leq 10 \text{ km/h for nominal speed } > 50 \text{ km/h}$$

6.1.2.4. Carry out the same test in the opposite direction, measuring time  $t_2$ .

6.1.2.5. Take the average  $T_1$  of the two times  $t_1$  and  $t_2$ .

6.1.2.6. Repeat these tests until the statistical accuracy (p) of the average

$$T = \frac{1}{n} \sum_{i=1}^n T_i$$

is equal to or less than 4 per cent ( $p \leq 4$  per cent).

The statistical accuracy (p) is defined by:

$$p = \frac{t.s}{\sqrt{n}} \cdot \frac{100}{T}$$

where:

T is the coefficient given by the table below;

s is the standard deviation:  $s = \sqrt{\frac{\sum_{i=1}^n (T_i - T)^2}{n - 1}}$

n is the number of tests

n	4	5	6	7	8	9	10
t	3.2	2.8	2.6	2.5	2.4	2.3	2.3
t/√n	1.6	1.25	1.06	0.94	0.85	0.77	0.73

6.1.2.7. Calculation of the running resistance force

The running resistance force F at the specified speed V is calculated as follows:

$$F = (M_{HP} + M_r) \cdot \frac{2\Delta V}{\Delta T} \cdot \frac{I}{3.6} \quad [N]$$

Where:

- $M_{HP}$  is the test mass.
- $M_r$  is the equivalent inertia mass of all the wheels and vehicle portions rotating with the wheels during coast down on the road.  $M_r$  should be measured or calculated by an appropriate manner.

6.1.2.8. The running resistance determined on the track shall be corrected to the reference ambient conditions as follows:

F corrected = k · F measured

$$k = \frac{R_R}{R_T} [1 + K_R(t - t_0)] + \frac{R_{AERO}}{R_T} \frac{d_0}{d_t}$$

Where:

- $R_R$  is the rolling resistance at speed V
- $R_{AERO}$  is the aerodynamic drag at speed V
- $R_T$  is the total road load =  $R_R + R_{AERO}$
- $K_R$  is the temperature correction factor of rolling resistance, taken to be equal to:  $3.6 \times 10^{-3}/^{\circ}C$
- t is the road test ambient temperature in  $^{\circ}C$
- $t_0$  is the reference ambient temperature =  $20^{\circ}C$
- $d_t$  is the air density at the test conditions
- $d_0$  is the air density at the reference conditions ( $20^{\circ}C, 100 \text{ kPa}$ ) =  $1.189 \text{ kg/m}^3$ .

The ratios  $R_R/R_T$  and  $R_{AERO}/R_T$  shall be specified by the vehicle manufacturer on the basis of the data normally available to the company.

If these values are not available, subject to the agreement of the manufacturer and the technical service concerned, the figures for the rolling/total resistance ratio given by the following formula may be used:

$$\frac{R_R}{R_T} = aM_{HP} + b$$

Where:

$M_{HP}$  is the test mass  
and for each speed the coefficients a and b are as shown in the following table:

V (km/h)	a	b
20	$7.24 \cdot 10^{-5}$	0.82
40	$1.59 \cdot 10^{-4}$	0.54
60	$1.96 \cdot 10^{-4}$	0.33
80	$1.85 \cdot 10^{-4}$	0.23
100	$1.63 \cdot 10^{-4}$	0.18
120	$1.57 \cdot 10^{-4}$	0.14

6.2. Setting of the dynamometer

The purpose of this procedure is to simulate on the dynamometer the total road load power at a given speed.

6.2.1. Measurement equipment and accuracy

The measuring equipment shall be similar to that used on the track.

6.2.2. Test procedure

6.2.2.1. Install the vehicle on the dynamometer.

6.2.2.2. Adjust the tyre pressure (cold) of the driving wheels as required for the chassis dynamometer.



6.2.2.3. Adjust the equivalent inertia mass of the chassis dynamometer, according to table 2.

Table 2

Test mass $M_{HP}$ (kg)	Equivalent inertia $I$ (kg)
$M_{HP} \leq 480$	455
$480 < M_{HP} \leq 540$	510
$540 < M_{HP} \leq 595$	570
$595 < M_{HP} \leq 650$	625
$650 < M_{HP} \leq 710$	680
$710 < M_{HP} \leq 765$	740
$765 < M_{HP} \leq 850$	800
$850 < M_{HP} \leq 965$	910
$965 < M_{HP} \leq 1,080$	1,020
$1,080 < M_{HP} \leq 1,190$	1,130
$1,190 < M_{HP} \leq 1,305$	1,250
$1,305 < M_{HP} \leq 1,420$	1,360
$1,420 < M_{HP} \leq 1,530$	1,470
$1,530 < M_{HP} \leq 1,640$	1,590
$1,640 < M_{HP} \leq 1,760$	1,700
$1,760 < M_{HP} \leq 1,870$	1,810
$1,870 < M_{HP} \leq 1,980$	1,930
$1,980 < M_{HP} \leq 2,100$	2,040
$2,100 < M_{HP} \leq 2,210$	2,150
$2,210 < M_{HP} \leq 2,380$	2,270
$2,380 < M_{HP} \leq 2,610$	2,270
$2,610 < M_{HP}$	2,270

6.2.2.4. Bring the vehicle and the chassis dynamometer to the stabilized operating temperature, in order to approximate the road conditions.

6.2.2.5. Carry out the operations specified in paragraph 6.1.2. to this annex with the exception of paragraphs 6.1.2.4. and 6.1.2.5., replacing  $M_{HP}$  by  $I$  and  $M_r$  by  $M_{tm}$  in the formula given in paragraph 6.1.2.7.

6.2.2.6. Adjust the brake to reproduce the corrected running resistance half payload (paragraph 6.1.2.8. to this annex) and to take into account the difference between the vehicle mass on the track and the equivalent inertia test mass ( $I$ ) to be used. This may be done by calculating the mean corrected road coast down time from  $V_2$

to  $V_1$  and reproducing the same time on the dynamometer by the following relationship:

$$T_{corrected} = (I + M_{rm}) \frac{2\Delta V}{F_{corrected}} \cdot \frac{1}{3.6}$$

where:

$I$  is the flywheel equivalent inertia mass of chassis dynamometer.

$M_{rm}$  is the equivalent inertia mass of the powered wheels and vehicle portions rotating with the wheels during coast down.  $M_{rm}$  shall be measured or calculated by an appropriate manner.

6.2.2.7. The power  $P_a$  to be absorbed by the bench should be determined in order to enable the same total road load power to be reproduced for the same vehicle on different days or on different chassis dynamometers of the same type.

Annex 8

METHOD OF MEASURING THE EMISSIONS OF CARBON DIOXIDE, FUEL  
CONSUMPTION AND THE ELECTRIC ENERGY CONSUMPTION OF  
VEHICLES POWERED BY A HYBRID ELECTRIC POWER TRAIN

1. INTRODUCTION

- 1.1. This annex defines the specific provisions regarding type-approval of a hybrid electric vehicle (HEV) as defined in paragraph 2.12.2. of this Regulation.
- 1.2. As a general principle for the tests, hybrid electric vehicles shall be tested according to the principles applied to vehicles powered by an internal combustion engine only (Annex 6), unless modified by this annex.
- 1.3. OVC vehicles (as categorised in paragraph 2. to this annex) shall be tested according to condition A and to condition B.

The test results under both conditions A and B and the weighted average shall be reported in the communication form described in Annex 4.

1.4. Driving cycles and gear shifting points

- 1.4.1. For vehicles with a manual transmission the driving cycle described in paragraphs 6.1.1., 6.1.2. and 6.1.3.1. of Annex 4a of Regulation No. 83 in force at the time of approval of the vehicle shall be used, including the prescribed gear shifting points.
- 1.4.2. For vehicles with a special gear shifting strategy the gear shifting points prescribed in paragraphs 6.1.1., 6.1.2. and 6.1.3.1 of Annex 4a of Regulation No. 83 are not applied. For these vehicles the driving cycle specified in paragraph 6.1.3.2.. of Annex 4a of Regulation No. 83 in force at the time of approval of the vehicle shall be used. Concerning gear shifting points, these vehicles shall be driven according to the manufacturer's instructions, as incorporated in the drivers' handbook of production vehicles and indicated by a technical gear shift instrument (for drivers information).
- 1.4.3. For vehicles with an automatic transmission the driving cycle specified in paragraph 6.1.3.2. of Annex 4a of Regulation No. 83 in force at the time of approval of the vehicle shall be used.
- 1.4.4. For vehicle conditioning a combination of the Part One and/or Part Two cycles of the applicable driving cycle shall be used as prescribed in this annex.

2. CATEGORIES OF HYBRID ELECTRIC VEHICLES

Vehicle charging	Off-Vehicle Charging <sup>(a)</sup> (OVC)		Not Off-Vehicle Charging <sup>(b)</sup> (NOVC)	
	Without	With	Without	With
Operating mode switch	Without	With	Without	With

(a) also known as "externally chargeable"

(b) also known as "not externally chargeable"

3. EXTERNALLY CHARGEABLE (OVC ELECTRIC HEV) WITHOUT AN OPERATING MODE SWITCH

3.1. Two tests shall be performed under the following conditions:

Condition A: Test shall be carried out with a fully charged electrical energy/power storage device.

Condition B: Test shall be carried out with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

The profile of the state of charge (SOC) of the electrical energy/power storage device during different stages of the Type I test is given in Appendix 1.

3.2. Condition A

3.2.1. The procedure shall start with the discharge of the electrical energy/power storage device as described in paragraph 3.2.1.1. below:

3.2.1.1. Discharge of the electrical energy/power storage device

The electrical energy/power storage device of the vehicle is discharged while driving (on the test track, on a chassis dynamometer, etc.):

- (a) At a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up;
- (b) Or, if a vehicle cannot reach a steady speed of 50 km/h without starting up the fuel consuming engine, the speed shall be reduced until the vehicle can run a lower steady speed where the fuel consuming engine just does not start up for a defined time/distance (to be specified between technical service and manufacturer);
- (c) Or with manufacturers' recommendation.

The fuel consuming engine shall be stopped within ten seconds of it being automatically started.

3.2.2. Conditioning of the vehicle

3.2.2.1. For conditioning compression-ignition engines the Part Two cycle of the applicable driving cycle shall be used in combination with the applicable gear shifting prescriptions as defined in paragraph 1.4. of this annex. Three consecutive cycles shall be driven.

3.2.2.2. Vehicles fitted with positive-ignition engines shall be preconditioned with one Part One and two Part Two cycles of the applicable driving cycle in combination with the applicable gear shifting prescriptions as defined in paragraph 1.4. of this annex.

3.2.2.3. After this preconditioning, and before testing, the vehicle shall be kept in a room in which the temperature remains relatively constant between 293 and 303 K (20 °C and 30 °C). This conditioning shall be carried out for at least six hours and continue until the engine oil temperature and coolant, if any, are within +/-2 K of the temperature of the room, and the electrical energy/power storage device is fully charged as a result of the charging prescribed in paragraph 3.2.2.4. below.

3.2.2.4. During soak, the electrical energy/power storage device shall be charged, using the normal overnight charging procedure as defined in paragraph 3.2.2.5. below.

3.2.2.5. Application of a normal overnight charge

The electrical energy/power storage device shall be charged according to the following procedure.

3.2.2.5.1. Normal overnight charge procedure

The charging is carried out:

- (a) With the on board charger if fitted; or
- (b) With an external charger recommended by the manufacturer using the charging pattern prescribed for normal charging;
- (c) In an ambient temperature comprised between 20 °C and 30 °C. This procedure excludes all types of special charges that could be automatically or manually initiated like, for instance, the equalisation charges or the servicing charges. The manufacturer shall declare that during the test, a special charge procedure has not occurred.

3.2.2.5.2. End of charge criteria

The end of charge criteria corresponds to a charging time of twelve hours, except if a clear indication is given to the driver by the standard instrumentation that the electrical energy/power storage device is not yet fully charged.

In this case,

$$\text{the maximum time is} = \frac{3 \cdot \text{claimed battery capacity (Wh)}}{\text{mains power supply (W)}}$$

3.2.3. Test procedure

3.2.3.1. The vehicle shall be started up by the means provided for normal use to the driver. The first cycle starts on the initiation of the vehicle start-up procedure.

3.2.3.2. The test procedures defined in either paragraph 3.2.3.2.1. or 3.2.3.2.2. may be used.

3.2.3.2.1. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and end on conclusion of the final idling period in the extra-urban cycle (Part Two, end of sampling (ES)).

3.2.3.2.2. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and continue over a number of repeat test cycles. It shall end on conclusion of the final idling period in the first extra-urban (Part Two) cycle during which the battery reached the minimum state of charge according to the criterion defined below (end of sampling (ES)).

The electricity balance  $Q$  [Ah] is measured over each combined cycle, using the procedure specified in Appendix 2 to this annex, and used to determine when the battery minimum state of charge has been reached.

The battery minimum state of charge is considered to have been reached in combined cycle  $N$  if the electricity balance measured during combined cycle  $N+1$  is not more than a 3 per cent discharge, expressed as a percentage of the nominal capacity of the battery (in Ah) in its maximum state of charge, as declared by the manufacturer. At the manufacturer's request additional test cycles may be run and their results included in the calculations in paragraphs 3.2.3.5. and 3.4.1. provided that the electricity balance for each additional test cycle shows less discharge of the battery than over the previous cycle.

In between each of the cycles a hot soak period of up to ten minutes is allowed. The powertrain shall be switched off during this period.

3.2.3.3. The vehicle shall be driven using the applicable driving cycle and gear shifting prescriptions as defined in paragraph 1.4. to this annex.

3.2.3.4. The exhaust gases shall be analysed according to Annex 4a of Regulation No. 83 in force at the time of approval of the vehicle.

- 3.2.3.5. The test results on the combined cycle (CO<sub>2</sub> and fuel consumption) for Condition A shall be recorded (respectively m<sub>1</sub> [g] and c<sub>1</sub> [l]). In the case of testing according to paragraph 3.2.3.2.1., m<sub>1</sub> and c<sub>1</sub> are simply the results of the single combined cycle run. In the case of testing according to paragraph 3.2.3.2.2., m<sub>1</sub> and c<sub>1</sub> are the sums of the results of the N combined cycles run.

$$m_1 = \sum_1^N m_i \quad c_1 = \sum_1^N c_i$$

- 3.2.4. Within thirty minutes after the conclusion of the last cycle, the electrical energy/power storage device shall be charged according to paragraph 3.2.2.5. of this annex). The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy e<sub>1</sub> [Wh] delivered from the mains.
- 3.2.5. The electric energy consumption for condition A is e<sub>1</sub> [Wh].
- 3.3. Condition B
- 3.3.1. Conditioning of the vehicle
- 3.3.1.1. The electrical energy/power storage device of the vehicle shall be discharged according to paragraph 3.2.1.1. of this annex. At the manufacturer's request, a conditioning according to paragraph 3.2.2.1. or 3.2.2.2. of this annex may be carried out before electrical energy / power storage discharge.
- 3.3.1.2. Before testing, the vehicle shall be kept in a room in which the temperature remains relatively constant between 293 and 303 K (20 °C and 30 °C). This conditioning shall be carried out for at least six hours and continue until the engine oil temperature and coolant, if any, are within +/-2 K of the temperature of the room.
- 3.3.2. Test procedure
- 3.3.2.1. The vehicle shall be started up by the means provided for normal use to the driver. The first cycle starts on the initiation of the vehicle start-up procedure.
- 3.3.2.2. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and end on conclusion of the final idling period in the extra-urban cycle (Part Two, end of sampling (ES)).
- 3.3.2.3. The vehicle shall be driven using the applicable driving cycle and gear shifting prescriptions as defined in paragraph 1.4. of this annex.
- 3.3.2.4. The exhaust gases shall be analysed according to Annex 4a of Regulation No. 83 in

force at the time of approval of the vehicle.

3.3.2.5. The test results on the combined cycle (CO<sub>2</sub> and fuel consumption) for Condition B shall be recorded (respectively  $m_2$  [g] and  $c_2$  [l]).

3.3.3. Within thirty minutes after the conclusion of the cycle, the electrical energy/power storage device shall be charged according to paragraph 3.2.2.5. of this annex.

The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy  $e_2$  [Wh] delivered from the mains.

3.3.4. The electrical energy/power storage device of the vehicle shall be discharged according to paragraph 3.2.1.1. of this annex.

3.3.5. Within thirty minutes after the discharge, the electrical energy/power storage device shall be charged according to paragraph 3.2.2.5. of this annex.

The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy  $e_3$  [Wh] delivered from the mains.

3.3.6. The electric energy consumption  $e_4$  [Wh] for condition B is:  $e_4 = e_2 - e_3$

3.4. Test results

3.4.1. The values of CO<sub>2</sub> shall be  $M_1 = m_1/D_{test1}$  and  $M_2 = m_2/D_{test2}$  [g/km] with  $D_{test1}$  and  $D_{test2}$  the total actual driven distances in the tests performed under conditions A (paragraph 3.2. of this annex) and B (paragraph 3.3. of this annex) respectively, and  $m_1$  and  $m_2$  determined in paragraphs 3.2.3.5. and 3.3.2.5. of this annex respectively.

3.4.2. The weighted values of CO<sub>2</sub> shall be calculated as below:

3.4.2.1. In the case of testing according to paragraph 3.2.3.2.1.:

$$M = (D_e \cdot M_1 + D_{av} \cdot M_2) / (D_e + D_{av})$$

Where:

$M$  = mass emission of CO<sub>2</sub> in grams per kilometre.

$M_1$  = mass emission of CO<sub>2</sub> in grams per kilometre with a fully charged electrical energy/power storage device.

$M_2$  = mass emission of CO<sub>2</sub> in grams per kilometre with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

$D_e$  = vehicle's electric range, according to the procedure described in Annex 9, where the manufacturer must provide the means for performing the measurement with the vehicle running in pure electric operating state.



$D_{av}$  = 25 km (assumed average distance between two battery recharges).

3.4.2.2. In the case of testing according to paragraph 3.2.3.2.2.:

$$M = (D_{ovc} \cdot M_1 + D_{av} \cdot M_2) / (D_{ovc} + D_{av})$$

Where:

$M$  = mass emission of CO<sub>2</sub> in grams per kilometre.

$M_1$  = mass emission of CO<sub>2</sub> in grams per kilometre with a fully charged electrical energy/power storage device.

$M_2$  = mass emission of CO<sub>2</sub> in grams per kilometre with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

$D_{ovc}$  = OVC range according to the procedure described in Annex 9.

$D_{av}$  = 25 km (assumed average distance between two battery recharges).

3.4.3. The values of fuel consumption shall be

$$C_1 = 100 \cdot c_1 / D_{test1} \text{ and } C_2 = 100 \cdot c_2 / D_{test2} \text{ [l/100 km]}$$

with  $D_{test1}$  and  $D_{test2}$  the total actual driven distances in the tests performed under conditions A (paragraph 3.2. of this annex) and B (paragraph 3.3. of this annex) respectively, and  $c_1$  and  $c_2$  determined in paragraphs 3.2.3.5. and 3.3.2.5. of this annex respectively.

3.4.4. The weighted values of fuel consumption shall be calculated as below:

3.4.4.1. In the case of test procedure according to paragraph 3.2.3.2.1.:

$$C = (D_e \cdot C_1 + D_{av} \cdot C_2) / (D_e + D_{av})$$

Where:

$C$  = fuel consumption in l/100 km.

$C_1$  = fuel consumption in l/100 km with a fully charged electrical energy/power storage device.

$C_2$  = fuel consumption in l/100 km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

$D_e$  = vehicle's electric range, according to the procedure described in Annex 9, where the manufacturer must provide the means for performing the measurement with the vehicle running in pure electric operating state.

$D_{av}$  = 25 km (assumed average distance between two battery recharges).

3.4.4.2. In the case of testing according to paragraph 3.2.3.2.2.:

$$C = (D_{ovc} \cdot C_1 + D_{av} \cdot C_2) / (D_{ovc} + D_{av})$$

Where:

$C$  = fuel consumption in l/100 km.

$C_1$  = fuel consumption in l/100 km with a fully charged electrical

- energy/power storage device.
- $C_2$  = fuel consumption in l/100 km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).
- $D_{ovc}$  = OVC range according to the procedure described in Annex 9.
- $D_{av}$  = 25 km (assumed average distance between two battery recharges).

3.4.5. The values of electric energy consumption shall be:

$$E_1 = e_1/D_{test1} \text{ and } E_4 = e_4/D_{test2} \text{ [Wh/km]}$$

with  $D_{test1}$  and  $D_{test2}$  the total actual driven distances in the tests performed under conditions A (paragraph 3.2. of this annex) and B (paragraph 3.3. of this annex) respectively, and  $e_1$  and  $e_4$  determined in paragraphs 3.2.5. and 3.3.6. of this annex respectively.

3.4.6. The weighted values of electric energy consumption shall be calculated as below:

3.4.6.1. In the case of testing according to paragraph 3.2.3.2.1.:

$$E = (D_e \cdot E_1 + D_{av} \cdot E_4) / (D_e + D_{av})$$

Where:

- $E$  = electric consumption Wh/km.
- $E_1$  = electric consumption Wh/km with a fully charged electrical energy/power storage device calculated.
- $E_4$  = electric consumption Wh/km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).
- $D_e$  = vehicle's electric range, according to the procedure described in Annex 9, where the manufacturer must provide the means for performing the measurement with the vehicle running in pure electric operating state.
- $D_{av}$  = 25 km (assumed average distance between two battery recharges).

3.4.6.2. In the case of testing according to paragraph 3.2.3.2.2.:

$$E = (D_{ovc} \cdot E_1 + D_{av} \cdot E_4) / (D_{ovc} + D_{av})$$

Where:

- $E$  = electric consumption Wh/km.
- $E_1$  = electric consumption Wh/km with a fully charged electrical energy/power storage device calculated.
- $E_4$  = electric consumption Wh/km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).
- $D_{ovc}$  = OVC range according to the procedure described in Annex 9.
- $D_{av}$  = 25 km (assumed average distance between two battery recharges).

4. EXTERNALLY CHARGEABLE (OVC HEV) WITH AN OPERATING MODE SWITCH

4.1. Two tests shall be performed under the following conditions:

4.1.1. Condition A: Test shall be carried out with a fully charged electrical energy/power storage device.

4.1.2. Condition B: Test shall be carried out with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity)

4.1.3. The operating mode switch shall be positioned according to the table below:

Hybrid-modes	↳ Pure electric ↳ Hybrid	↳ Pure fuel consuming ↳ Hybrid	↳ Pure electric consuming ↳ Pure fuel consuming ↳ Hybrid	↳ Hybrid mode n */ ↳ ... ↳ Hybrid mode m */
Battery state of charge	Switch in position	Switch in position	Switch in position	Switch in position
Condition A Fully charged	Hybrid	Hybrid	Hybrid	Most electric hybrid mode **/
Condition B Min. state of charge	Hybrid	Fuel consuming	Fuel consuming	Most fuel consuming mode ***/

\*/ For instance: sport, economic, urban, extra-urban position ...

\*\*/ Most electric hybrid mode:  
The hybrid mode which can be proven to have the highest electricity consumption of all selectable hybrid modes when tested in accordance with condition A, to be established based on information provided by the manufacturer and in agreement with the technical service.

\*\*\*/ Most fuel consuming mode:  
The hybrid mode which can be proven to have the highest fuel consumption of all selectable hybrid modes when tested in accordance with condition B, to be established based on information provided by the manufacturer and in agreement with the technical service.

4.2. Condition A

4.2.1. If the electric range of the vehicle, as measured in accordance with Annex 9 to this Regulation, is higher than 1 complete cycle, on the request of the manufacturer, the type I test for electric energy measurement may be carried out in pure electric mode, after agreement of the technical service. In this case, the values of M<sub>1</sub> and C<sub>1</sub>

in paragraph 4.4. are equal to 0.

4.2.2. The procedure shall start with the discharge of the electrical energy/power storage device of the vehicle as described in paragraph 4.2.2.1. below.

4.2.2.1. The electrical energy/power storage device of the vehicle is discharged while driving with the switch in pure electric position (on the test track, on a chassis dynamometer, etc.) at a steady speed of 70 per cent  $\pm$  5 per cent of the maximum speed of the vehicle in pure electric mode, which is to be determined according to the test procedure for electric vehicles defined in Regulation No. 68.

Stopping the discharge occurs:

- (a) When the vehicle is not able to run at 65 per cent of the maximum thirty minutes speed; or
- (b) When an indication to stop the vehicle is given to the driver by the standard on-board instrumentation; or
- (c) After covering a distance of 100 km.

If the vehicle is not equipped with a pure electric mode, the electrical energy/power storage device discharge shall be achieved by driving the vehicle (on the test track, on a chassis dynamometer, etc.):

- (a) At a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up;
- (b) Or if a vehicle cannot reach a steady speed of 50 km/h without starting up the fuel consuming engine, the speed shall be reduced until the vehicle can run a lower steady speed where the fuel consuming engine just does not start up for a defined time/distance (to be specified between technical service and manufacturer);
- (c) Or with manufacturers' recommendation.

The fuel-consuming engine shall be stopped within ten seconds of it being automatically started.

4.2.3. Conditioning of the vehicle:

4.2.3.1. For conditioning compression-ignition engined vehicles the Part Two cycle of the applicable driving cycle shall be used in combination with the applicable gear shifting prescriptions as defined in paragraph 1.4. of this annex. Three consecutive cycles shall be driven.

4.2.3.2. Vehicles fitted with positive-ignition engines shall be preconditioned with one Part One and two Part Two cycles of the applicable driving cycle in combination with

the applicable gear shifting prescriptions as defined in paragraph 1.4. of this annex.

- 4.2.3.3. After this preconditioning, and before testing, the vehicle shall be kept in a room in which the temperature remains relatively constant between 293 and 303 K (20 °C and 30 °C). This conditioning shall be carried out for at least six hours and continue until the engine oil temperature and coolant, if any, are within  $\pm 2$  K of the temperature of the room, and the electrical energy/power storage device is fully charged as a result of the charging prescribed in paragraph 4.2.3.4. below.
- 4.2.3.4. During soak, the electrical energy/power storage device shall be charged, using the normal overnight charging procedure as defined in paragraph 3.2.2.5. of this annex.
- 4.2.4. Test procedure
- 4.2.4.1. The vehicle shall be started up by the means provided for normal use to the driver. The first cycle starts on the initiation of the vehicle start-up procedure.
- 4.2.4.2. The test procedures defined in either paragraph 4.2.4.2.1. or 4.2.4.2.2. may be used.
- 4.2.4.2.1. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and end on conclusion of the final idling period in the extra-urban cycle (Part Two, end of sampling (ES)).
- 4.2.4.2.2. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and continue over a number of repeat test cycles. It shall end on conclusion of the final idling period in the first extra-urban (Part Two) cycle during which the battery reached the minimum state of charge according to the criterion defined below (end of sampling (ES)).

The electricity balance  $Q$  [Ah] is measured over each combined cycle, using the procedure specified in Appendix 2 to this annex, and used to determine when the battery minimum state of charge has been reached.

The battery minimum state of charge is considered to have been reached in combined cycle  $N$  if the electricity balance measured during combined cycle  $N+1$  is not more than a 3 per cent discharge, expressed as a percentage of the nominal capacity of the battery (in Ah) in its maximum state of charge, as declared by the manufacturer. At the manufacturer's request additional test cycles may be run and their results included in the calculations in paragraphs 4.2.4.5. and 4.4.1. provided that the electricity balance for each additional test cycle shows less discharge of the battery than over the previous cycle.

In between each of the cycles a hot soak period of up to ten minutes is allowed. The powertrain shall be switched off during this period.

- 4.2.4.3. The vehicle shall be driven using the applicable driving cycle and gear shifting prescriptions as defined in paragraph 1.4. to this annex.
- 4.2.4.4. The exhaust gases shall be analysed according to Annex 4 of Regulation No. 83 in force at the time of approval of the vehicle.
- 4.2.4.5. The test results on the combined cycle (CO<sub>2</sub> and fuel consumption) for Condition A shall be recorded (respectively  $m_1$  [g] and  $c_1$  [l]). In the case of testing according to paragraph 4.2.4.2.1.,  $m_1$  and  $c_1$  are simply the results of the single combined cycle run. In the case of testing according to paragraph 4.2.4.2.2.,  $m_1$  and  $c_1$  are the sums of the results of the N combined cycles run.

$$m_1 = \sum_1^N m_i \qquad c_1 = \sum_1^N c_i$$

- 4.2.5. Within thirty minutes after the conclusion of the last cycle, the electrical energy/power storage device shall be charged according to paragraph 3.2.2.5. of this annex).

The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy  $e_1$  [Wh] delivered from the mains.

- 4.2.6. The electric energy consumption for condition A is  $e_1$  [Wh].

### 4.3. Condition B

#### 4.3.1. Conditioning of the vehicle

- 4.3.1.1. The electrical energy/power storage device of the vehicle shall be discharged according to paragraph 4.2.2.1. of this annex.

At the manufacturer's request, a conditioning according to paragraph 4.2.3.1. or 4.2.3.2. of this annex may be carried out before electrical energy / power storage discharge.

- 4.3.1.2. Before testing, the vehicle shall be kept in a room in which the temperature remains relatively constant between 293 and 303 K (20 and 30 °C). This conditioning shall be carried out for at least six hours and continue until the engine oil temperature and coolant, if any, are within  $\pm 2$  K of the temperature of the room.

#### 4.3.2. Test procedure

- 4.3.2.1. The vehicle shall be started up by the means provided for normal use to the driver. The first cycle starts on the initiation of the vehicle start-up procedure.

- 4.3.2.2. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and end on conclusion of the final idling period in the extra-urban cycle (Part Two, end of sampling (ES)).
- 4.3.2.3. The vehicle shall be driven using the applicable driving cycle and gear shifting prescriptions as defined in paragraph 1.4. to this annex.
- 4.3.2.4. The exhaust gases shall be analysed according Annex 4a of Regulation No. 83 in force at the time of approval of the vehicle.
- 4.3.2.5. The test results on the combined cycle (CO<sub>2</sub> and fuel consumption) for Condition B shall be recorded (respectively m<sub>2</sub> [g] and c<sub>2</sub> [l]).
- 4.3.3. Within thirty minutes after the conclusion of the cycle, the electrical energy/power storage device shall be charged according to paragraph 3.2.2.5. of this annex.
- The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy e<sub>2</sub> [Wh] delivered from the mains.
- 4.3.4. The electrical energy/power storage device of the vehicle shall be discharged in accordance with paragraph 4.2.2.1. of this annex.
- 4.3.5. Within thirty minutes after the discharge, the electrical energy/power storage device shall be charged according to paragraph 3.2.2.5. of this annex.
- The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy e<sub>3</sub> [Wh] delivered from the mains.
- 4.3.6. The electric energy consumption e<sub>4</sub> [Wh] for condition B is: e<sub>4</sub> = e<sub>2</sub> - e<sub>3</sub>
- 4.4. Test results
- 4.4.1. The values of CO<sub>2</sub> shall be M<sub>1</sub> = m<sub>1</sub>/D<sub>test1</sub> and M<sub>2</sub> = m<sub>2</sub>/D<sub>test2</sub> [g/km] with D<sub>test1</sub> and D<sub>test2</sub> the total actual driven distances in the tests performed under conditions A (paragraph 4.2. of this annex) and B (paragraph 4.3. of this annex) respectively, and m<sub>1</sub> and m<sub>2</sub> determined in paragraphs 4.2.4.5. and 4.3.2.5. of this annex respectively.
- 4.4.2. The weighted values of CO<sub>2</sub> shall be calculated as below:
- 4.4.2.1. In the case of testing according to paragraph 4.2.4.2.1.:

$$M = (D_e \cdot M_1 + D_{av} \cdot M_2) / (D_e + D_{av})$$

Where:

- M = mass emission of CO<sub>2</sub> in grams per kilometre.  
M<sub>1</sub> = mass emission of CO<sub>2</sub> in grams per kilometre with a fully charged electrical energy/power storage device.  
M<sub>2</sub> = mass emission of CO<sub>2</sub> in grams per kilometre with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).  
D<sub>e</sub> = vehicle's electric range, according to the procedure described in Annex 9, where the manufacturer must provide the means for performing the measurement with the vehicle running in pure electric operating state.  
D<sub>av</sub> = 25 km (assumed average distance between two battery recharges).

4.4.2.2. In the case of testing according to paragraph 4.2.4.2.2.:

$$M = (D_{ovc} \cdot M_1 + D_{av} \cdot M_2) / (D_{ovc} + D_{av})$$

Where

- M = mass emission of CO<sub>2</sub> in grams per kilometre.  
M<sub>1</sub> = mass emission of CO<sub>2</sub> in grams per kilometre with a fully charged electrical energy/power storage device.  
M<sub>2</sub> = mass emission of CO<sub>2</sub> in grams per kilometre with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).  
D<sub>ovc</sub> = OVC range according to the procedure described in Annex 9.  
D<sub>av</sub> = 25 km (assumed average distance between two battery recharges).

4.4.3. The values of fuel consumption shall be:

$$C_1 = 100 \cdot c_1 / D_{test1} \text{ and } C_2 = 100 \cdot c_2 / D_{test2} \text{ [l/100 km]}$$

with D<sub>test1</sub> and D<sub>test2</sub> the total actual driven distances in the tests performed under conditions A (paragraph 4.2. of this annex) and B (paragraph 4.3. of this annex) respectively, and c<sub>1</sub> and c<sub>2</sub> determined in paragraphs 4.2.4.5. and 4.3.2.5. of this annex respectively.

4.4.4. The weighted values of fuel consumption shall be calculated as below:

4.4.4.1. In the case of testing according to paragraph 4.2.4.2.1.:

$$C = (D_e \cdot C_1 + D_{av} \cdot C_2) / (D_e + D_{av})$$

Where:

- C = fuel consumption in l/100 km.  
C<sub>1</sub> = fuel consumption in l/100 km with a fully charged electrical energy/power storage device.  
C<sub>2</sub> = fuel consumption in l/100 km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).



- $D_e$  = vehicle's electric range, according to the procedure described in Annex 9, where the manufacturer must provide the means for performing the measurement with the vehicle running in pure electric operating state.
- $D_{av}$  = 25 km (assumed average distance between two battery recharges).

4.4.4.2. In the case of testing according to paragraph 4.2.4.2.2.:

$$C = (D_{ovc} \cdot C_1 + D_{av} \cdot C_2) / (D_{ovc} + D_{av})$$

Where:

- $C$  = fuel consumption in l/100 km.
- $C_1$  = fuel consumption in l/100 km with a fully charged electrical energy/power storage device.
- $C_2$  = fuel consumption in l/100 km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).
- $D_{ovc}$  = OVC range according to the procedure described in Annex 9.
- $D_{av}$  = 25 km (assumed average distance between two battery recharges).

4.4.5. The values of electric energy consumption shall be:

$$E_1 = e_1 / D_{test1} \text{ and } E_4 = e_4 / D_{test2} \text{ [Wh/km]}$$

with  $D_{test1}$  and  $D_{test2}$  the total actual driven distances in the tests performed under conditions A (paragraph 4.2. of this annex) and B (paragraph 3.3. of this annex) respectively, and  $e_1$  and  $e_4$  determined in paragraphs 4.2.6. and 4.3.6. of this annex respectively.

4.4.6. The weighted values of electric energy consumption shall be calculated as below:

4.4.6.1. In the case of testing according to paragraph 4.2.4.2.1.:

$$E = (D_e \cdot E_1 + D_{av} \cdot E_4) / (D_e + D_{av})$$

Where:

- $E$  = electric consumption Wh/km.
- $E_1$  = electric consumption Wh/km with a fully charged electrical energy/power storage device calculated.
- $E_4$  = electric consumption Wh/km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).
- $D_e$  = vehicle's electric range, according to the procedure described in Annex 9, where the manufacturer must provide the means for performing the measurement with the vehicle running in pure electric operating state.
- $D_{av}$  = 25 km (assumed average distance between two battery recharges).

4.4.6.2. In the case of testing according to paragraph 4.2.4.2.2.:

$$E = (D_{ovc} \cdot E_1 + D_{av} \cdot E_4) / (D_{ovc} + D_{av})$$

Where:

- E = electric consumption Wh/km.
- E<sub>1</sub> = electric consumption Wh/km with a fully charged electrical energy/power storage device calculated.
- E<sub>4</sub> = electric consumption Wh/km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).
- D<sub>ovc</sub> = OVC range according to the procedure described in Annex 9.
- D<sub>av</sub> = 25 km (assumed average distance between two battery recharges).

5. NOT EXTERNALLY CHARGEABLE (NOVC HEV) WITHOUT AN OPERATING MODE SWITCH

5.1. These vehicles shall be tested according to Annex 6, using the applicable driving cycle and gear shifting prescriptions as defined in paragraph 1.4. of this annex.

5.1.1. Emissions of carbon dioxide (CO<sub>2</sub>) and fuel consumption shall be determined separately for the Part One (urban driving) and the Part Two (extra-urban driving) of the specified driving cycle.

5.2. For preconditioning, at least 2 consecutive complete driving cycles (one Part One and one Part two) are carried out without intermediate soak, using the applicable driving cycle and gear shifting prescriptions as defined in paragraph 1.4. of this annex.

5.3. Test results

5.3.1. The test results (fuel consumption C [l/100 km] and CO<sub>2</sub>-emission M [g/km]) of this test are corrected in function of the energy balance ΔE<sub>batt</sub> of the vehicle's battery.

The corrected values (C<sub>0</sub> [l/100 km] and M<sub>0</sub> [g/km]) should correspond to a zero energy balance (ΔE<sub>batt</sub> = 0), and are calculated using a correction coefficient determined by the manufacturer as defined below.

In case of other storage systems than an electric battery, ΔE<sub>batt</sub> is representing ΔE<sub>storage</sub>, the energy balance of the electric energy storage device.

5.3.1.1. The electricity balance Q [Ah], measured using the procedure specified in appendix 2 to this annex, is used as a measure of the difference in the vehicle battery's energy content at the end of the cycle compared to the beginning of the cycle. The electricity balance is to be determined separately for the Part One cycle and the Part Two cycle.

- 5.3.2. Under the conditions below, it is allowed to take the uncorrected measured values C and M as the test results:
- 1) in case the manufacturer can prove that there is no relation between the energy balance and fuel consumption,
  - 2) in case that  $\Delta E_{\text{batt}}$  always corresponds to a battery charging,
  - 3) in case that  $\Delta E_{\text{batt}}$  always corresponds to a battery discharging and  $\Delta E_{\text{batt}}$  is within 1 per cent of the energy content of the consumed fuel (consumed fuel meaning the total fuel consumption over 1 cycle).

The change in battery energy content  $\Delta E_{\text{batt}}$  can be calculated from the measured electricity balance Q as follows:

$$\Delta E_{\text{batt}} = \Delta \text{SOC}(\%) \cdot E_{\text{TEbatt}} \cong 0.0036 \cdot |\Delta \text{Ah}| \cdot V_{\text{batt}} = 0.0036 \cdot Q \cdot V_{\text{batt}} \quad (\text{MJ})$$

with  $E_{\text{TEbatt}}$  [MJ] the total energy storage capacity of the battery and  $V_{\text{batt}}$  [V] the nominal battery voltage.

5.3.3. Fuel consumption correction coefficient ( $K_{\text{fuel}}$ ) defined by the manufacturer

5.3.3.1. The fuel consumption correction coefficient ( $K_{\text{fuel}}$ ) shall be determined from a set of n measurements performed by the manufacturer. This set should contain at least one measurement with  $Q_i < 0$  and at least one with  $Q_j > 0$ .

If the latter condition can not be realised on the driving cycle (Part One or Part Two) used in this test, then it is up to the Technical Service to judge the statistical significance of the extrapolation necessary to determine the fuel consumption value at  $\Delta E_{\text{batt}} = 0$ .

5.3.3.2. The fuel consumption correction coefficient ( $K_{\text{fuel}}$ ) is defined as:

$$K_{\text{fuel}} = (n \cdot \sum Q_i C_i - \sum Q_i \cdot \sum C_i) / (n \cdot \sum Q_i^2 - (\sum Q_i)^2) \quad (l/100 \text{ km/Ah})$$

where:

- $C_i$  : fuel consumption measured during i-th manufacturer's test (l/100 km)
- $Q_i$  : electricity balance measured during i-th manufacturer's test (Ah)
- n : number of data

The fuel consumption correction coefficient shall be rounded to four significant figures (e.g. 0.xxxx or xx.xx). The statistical significance of the fuel consumption correction coefficient is to be judged by the Technical Service.

5.3.3.3. Separate fuel consumption correction coefficients shall be determined for the fuel consumption values measured over the Part One cycle and the Part Two cycle respectively.

5.3.4. Fuel consumption at zero battery energy balance ( $C_0$ )

5.3.4.1. The fuel consumption  $C_0$  at  $\Delta E_{\text{batt}} = 0$  is determined by the following equation:

$$C_0 = C - K_{\text{fuel}} \cdot Q \quad (\text{l}/100 \text{ km})$$

where:

- C: fuel consumption measured during test (l/100 km)
- Q: electricity balance measured during test (Ah)

5.3.4.2. Fuel consumption at zero battery energy balance shall be determined separately for the fuel consumption values measured over the Part One cycle and the Part Two cycle respectively.

5.3.5.  $\text{CO}_2$ -emission correction coefficient ( $K_{\text{CO}_2}$ ) defined by the manufacturer

5.3.5.1. The  $\text{CO}_2$ -emission correction coefficient ( $K_{\text{CO}_2}$ ) shall be determined as follows from a set of  $n$  measurements performed by the manufacturer. This set should contain at least one measurement with  $Q_i < 0$  and at least one with  $Q_i > 0$ .

If the latter condition can not be realised on the driving cycle (Part One or Part Two) used in this test, then it is up to the Technical Service to judge the statistical significance of the extrapolation necessary to determine the  $\text{CO}_2$ -emission value at  $\Delta E_{\text{batt}} = 0$ .

5.3.5.2. The  $\text{CO}_2$ -emission correction coefficient ( $K_{\text{CO}_2}$ ) is defined as:

$$K_{\text{CO}_2} = (n \cdot \sum Q_i M_i - \sum Q_i \cdot \sum M_i) / (n \cdot \sum Q_i^2 - (\sum Q_i)^2) \quad (\text{g}/\text{km}/\text{Ah})$$

where:

- $M_i$ :  $\text{CO}_2$ -emission measured during  $i$ -th manufacturer's test (g/km)
- $Q_i$ : electricity balance during  $i$ -th manufacturer's test (Ah)
- $n$ : number of data

The  $\text{CO}_2$ -emission correction coefficient shall be rounded to four significant figures (e.g. 0.xxxx or xx.xx). The statistical significance of the  $\text{CO}_2$ -emission correction coefficient is to be judged by the Technical Service.

5.3.5.3. Separate CO<sub>2</sub>-emission correction coefficients shall be determined for the fuel consumption values measured over the Part One cycle and the Part Two cycle respectively.

5.3.6. CO<sub>2</sub>-emission at zero battery energy balance (M<sub>0</sub>)

5.3.6.1. The CO<sub>2</sub>-emission M<sub>0</sub> at ΔE<sub>batt</sub> = 0 is determined by the following equation:

$$M_0 = M - K_{CO_2} \cdot Q \quad (\text{g/km})$$

where:

C: fuel consumption measured during test (l/100 km)

Q: electricity balance measured during test (Ah)

5.3.6.2. CO<sub>2</sub>-emission at zero battery energy balance shall be determined separately for the CO<sub>2</sub>-emission values measured over the Part One cycle and the Part Two cycle respectively.

6. Not Externally Chargeable (notOVC HEV) with an operating mode switch

6.1. These vehicles shall be tested in hybrid mode according to Annex 6, using the applicable driving cycle and gear shifting prescriptions as defined in paragraph 1.4. of this annex. If several hybrid modes are available, the test shall be carried out in the mode that is automatically set after turn on of the ignition key (normal mode).

6.1.1. Emissions of carbon dioxide (CO<sub>2</sub>) and fuel consumption shall be determined separately for the Part One (urban driving) and the Part Two (extra-urban driving) of the specified driving cycle.

6.2. For preconditioning, at least 2 consecutive complete driving cycles (one Part One and one Part two) are carried out without intermediate soak, using the applicable driving cycle and gear shifting prescriptions as defined in paragraph 1.4. of this annex.

6.3. Test results

6.3.1. The test results (fuel consumption C [l/100 km] and CO<sub>2</sub>-emission M [g/km]) of this test are corrected in function of the energy balance ΔE<sub>batt</sub> of the vehicle's battery.

The corrected values (C<sub>0</sub> [l/100 km] and M<sub>0</sub> [g/km]) should correspond to a zero energy balance (ΔE<sub>batt</sub> = 0), and are calculated using a correction coefficient determined by the manufacturer as defined below.

In case of other storage systems than an electric battery,  $\Delta E_{\text{batt}}$  is representing  $\Delta E_{\text{storage}}$ , the energy balance of the electric energy storage device.

- 6.3.1.1. The electricity balance  $Q$  [Ah], measured using the procedure specified in appendix 2 to this annex, is used as a measure of the difference in the vehicle battery's energy content at the end of the cycle compared to the beginning of the cycle. The electricity balance is to be determined separately for the Part One cycle and the Part Two cycle.
- 6.3.2. Under the conditions below, it is allowed to take the uncorrected measured values  $C$  and  $M$  as the test results:
- 1) in case the manufacturer can prove that there is no relation between the energy balance and fuel consumption,
  - 2) in case that  $\Delta E_{\text{batt}}$  always corresponds to a battery charging
  - 3) in case that  $\Delta E_{\text{batt}}$  always corresponds to a battery discharging and  $\Delta E_{\text{batt}}$  is within 1 per cent of the energy content of the consumed fuel (consumed fuel meaning the total fuel consumption over 1 cycle)

The change in battery energy content  $\Delta E_{\text{batt}}$  can be calculated from the measured electricity balance  $Q$  as follows:

$$\Delta E_{\text{batt}} = \Delta \text{SOC}(\%) \cdot E_{\text{TEbatt}} \cong 0.0036 \cdot |\Delta \text{Ah}| \cdot V_{\text{batt}} = 0.0036 \cdot Q \cdot V_{\text{batt}} \text{ (MJ)}$$

with  $E_{\text{TEbatt}}$  [MJ] the total energy storage capacity of the battery and  $V_{\text{batt}}$  [V] the nominal battery voltage.

- 6.3.3. Fuel consumption correction coefficient ( $K_{\text{fuel}}$ ) defined by the manufacturer
- 6.3.3.1. The fuel consumption correction coefficient ( $K_{\text{fuel}}$ ) shall be determined from a set of  $n$  measurements performed by the manufacturer. This set should contain at least one measurement with  $Q_i < 0$  and at least one with  $Q_j > 0$ .

If the latter condition can not be realised on the driving cycle (Part One or Part Two) used in this test, then it is up to the Technical Service to judge the statistical significance of the extrapolation necessary to determine the fuel consumption value at  $\Delta E_{\text{batt}} = 0$ .

- 6.3.3.2. The fuel consumption correction coefficient ( $K_{\text{fuel}}$ ) is defined as:

$$K_{\text{fuel}} = (n \cdot \sum Q_i C_i - \sum Q_i \cdot \sum C_i) / (n \cdot \sum Q_i^2 - (\sum Q_i)^2) \quad (\text{l/100 km/Ah})$$

where:

- $C_i$  : fuel consumption measured during  $i$ -th manufacturer's test (l/100 km)  
 $Q_i$  : electricity balance measured during  $i$ -th manufacturer's test (Ah)

n : number of data

The fuel consumption correction coefficient shall be rounded to four significant figures (e.g. 0.xxxx or xx.xx). The statistical significance of the fuel consumption correction coefficient is to be judged by the Technical Service.

6.3.3.3. Separate fuel consumption correction coefficients shall be determined for the fuel consumption values measured over the Part One cycle and the Part Two cycle respectively.

6.3.4. Fuel consumption at zero battery energy balance ( $C_0$ )

6.3.4.1. The fuel consumption  $C_0$  at  $\Delta E_{\text{batt}} = 0$  is determined by the following equation:

$$C_0 = C - K_{\text{fuel}} \cdot Q \quad (\text{l/100 km})$$

where:

C : fuel consumption measured during test (l/100 km)

Q : electricity balance measured during test (Ah)

6.3.4.2. Fuel consumption at zero battery energy balance shall be determined separately for the fuel consumption values measured over the Part One cycle and the Part Two cycle respectively.

6.3.5. CO<sub>2</sub>-emission correction coefficient ( $K_{\text{CO}_2}$ ) defined by the manufacturer

6.3.5.1. The CO<sub>2</sub>-emission correction coefficient ( $K_{\text{CO}_2}$ ) shall be determined as follows from a set of n measurements performed by the manufacturer. This set should contain at least one measurement with  $Q_i < 0$  and at least one with  $Q_i > 0$ .

If the latter condition can not be realised on the driving cycle (Part One or Part Two) used in this test, then it is up to the Technical Service to judge the statistical significance of the extrapolation necessary to determine the CO<sub>2</sub>-emission value at  $\Delta E_{\text{batt}} = 0$ .

6.3.5.2. The CO<sub>2</sub>-emission correction coefficient ( $K_{\text{CO}_2}$ ) is defined as:

$$K_{\text{CO}_2} = (n \cdot \sum Q_i M_i - \sum Q_i \cdot \sum M_i) / (n \cdot \sum Q_i^2 - (\sum Q_i)^2) \quad (\text{g/km/Ah})$$

where:

- $M_i$ : CO<sub>2</sub>-emission measured during i-th manufacturer's test (g/km)
- $Q_i$ : electricity balance during i-th manufacturer's test (Ah)
- n: number of data

The CO<sub>2</sub>-emission correction coefficient shall be rounded to four significant figures (e.g. 0.xxxx or xx.xx). The statistical significance of the CO<sub>2</sub>-emission correction coefficient is to be judged by the Technical Service.

- 6.3.5.3. Separate CO<sub>2</sub>-emission correction coefficients shall be determined for the fuel consumption values measured over the Part One cycle and the Part Two cycle respectively.
- 6.3.6. CO<sub>2</sub>-emission at zero battery energy balance ( $M_0$ )
- 6.3.6.1. The CO<sub>2</sub>-emission  $M_0$  at  $\Delta E_{\text{batt}} = 0$  is determined by the following equation:

$$M_0 = M - K_{\text{CO}_2} \cdot Q \quad (\text{g/km})$$

where:

- C: fuel consumption measured during test (l/100 km)
- Q: electricity balance measured during test (Ah)

- 6.3.6.2. CO<sub>2</sub>-emission at zero battery energy balance shall be determined separately for the CO<sub>2</sub>-emission values measured over the Part One cycle and the Part Two cycle respectively.




Annex 8 - Appendix 1

**ELECTRICAL ENERGY/POWER STORAGE DEVICE STATE OF CHARGE (SOC) PROFILE FOR OVC HEVS**


The SOC profiles for OVC-HEVs tested under conditions A and B are:

Condition A:

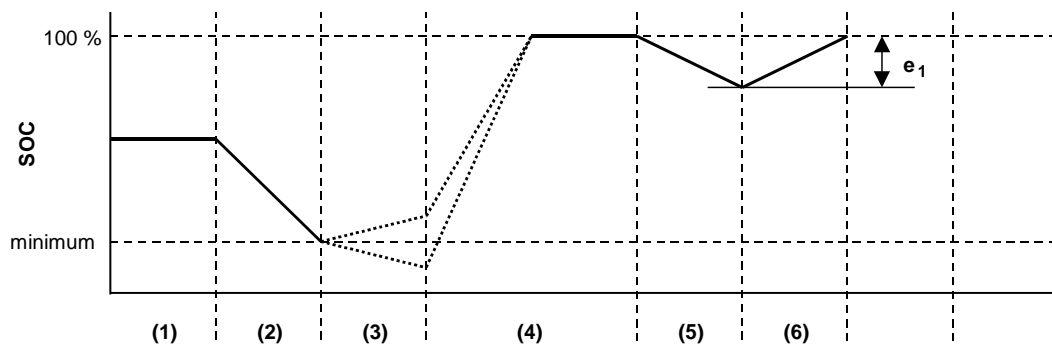

- (1) initial state of charge of the electrical energy/power storage device
- (2) discharge according to paragraph 3.2.1. or 4.2.2. of this annex
- (3) vehicle conditioning according to paragraph 3.2.2.1./3.2.2.2. or 4.2.3.1./4.2.3.2. of this annex
- (4) charge during soak according to paragraph 3.2.2.3. and 3.2.2.4. or 4.2.3.3. and 4.2.3.4. of this annex
- (5) test according to paragraph 3.2.3. or 4.2.4. of this annex
- (6) charging according to paragraph 3.2.4. or 4.2.5. of this annex

Condition B:

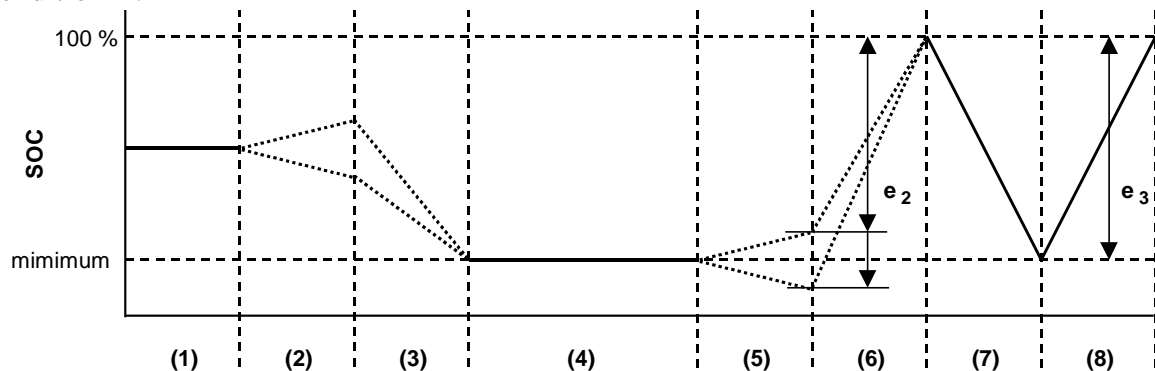

- (1) initial state of charge
- (2) vehicle conditioning according to paragraph 3.3.1.1. or 4.3.1.1. (optional) of this annex
- (3) discharge according to paragraph 3.3.1.1. or 4.3.1.1. of this annex

- (4) soak according to paragraph 3.3.1.2. or 4.3.1.2. of this annex
- (5) test according to paragraph 3.3.2. or 4.3.2. of this annex
- (6) charging according to paragraph 3.3.3. or 4.3.3. of this annex
- (7) discharging according to paragraph 3.3.4. or 4.3.4. of this annex
- (8) charging according to paragraph 3.3.5. or 4.3.5. of this annex

Annex 8 - Appendix 2

METHOD FOR MEASURING THE ELECTRICITY BALANCE OF  
THE BATTERY OF OVC AND NOVC HEVS

1. Introduction
  - 1.1. The purpose of this appendix is to define the method and required instrumentation for measuring the electricity balance of Off Vehicle Charging Hybrid Electric Vehicles (OVC HEV and Not Off Vehicle Charging Hybrid Electric Vehicles (NOVC HEVs). Measurement of the electricity balance is necessary
    - (a) To determine when the minimum state of charge of the battery has been reached during the test procedure defined in paragraphs 3. and 4. of this annex; and
    - (b) To correct the measured fuel consumption and CO<sub>2</sub>-emissions for the change in battery energy content occurring during the test, using the method defined in paragraphs 5. and 6. of this annex.
  - 1.2. The method described in this annex shall be used by the manufacturer for the measurements that are performed to determine the correction factors  $K_{fuel}$  and  $K_{CO_2}$ , as defined in paragraphs 5.3.3.2., 5.3.5.2., 6.3.3.2., and 6.3.5.2. of this annex.

The Technical Service shall check whether these measurements have been performed in accordance with the procedure described in this annex.
  - 1.3. The method described in this annex shall be used by the Technical Service for the measurement of the electricity balance  $Q$ , as defined in paragraphs 3.2.3.2.2., 4.2.4.2.2., 5.3.4.1., 5.3.6.1., 6.3.4.1., and 6.3.6.1. of this annex.
2. Measurement equipment and instrumentation
  - 2.1. During the tests as described in paragraphs 3., 4., 5. and 6. of this annex, the battery current shall be measured using a current transducer of the clamp-on type or the closed type. The current transducer (i.e. the current sensor without data acquisition equipment) shall have a minimum accuracy of 0.5 per cent of the measured value (in A) or 0.1 per cent of the maximum value of the scale.

OEM diagnostic testers are not to be used for the purpose of this test.
  - 2.1.1. The current transducer shall be fitted on one of the wires directly connected to the battery. In order to easily measure battery current using external measuring equipment, manufacturers should preferably integrate appropriate, safe and accessible connection points in the vehicle. If that is not feasible, the manufacturer

is obliged to support the Technical Service by providing the means to connect a current transducer to the wires connected to the battery in the above described manner.

- 2.1.2. The output of the current transducer shall be sampled with a minimum sample frequency of 5 Hz. The measured current shall be integrated over time, yielding the measured value of Q, expressed in Ampere hours (Ah).
- 2.1.3. The temperature at the location of the sensor shall be measured and sampled with the same sample frequency as the current, so that this value can be used for possible compensation of the drift of current transducers and, if applicable, the voltage transducer used to convert the output of the current transducer.
- 2.2. A list of the instrumentation (manufacturer, model no., serial no.) used by the manufacturer for determining:
- (a) When the minimum state of charge of the battery has been reached during the test procedure defined in paragraphs 3. and 4. of this annex; and
  - (b) The correction factors  $K_{\text{fuel}}$  and  $K_{\text{CO}_2}$  (as defined in paragraphs 5.3.3.2., 5.3.5.2., 6.3.3.2., and 6.3.5.2. of this annex)  
and the last calibration dates of the instruments (where applicable) should be provided to the Technical Service.
3. Measurement procedure
- 3.1. Measurement of the battery current shall start at the same time as the test starts and shall end immediately after the vehicle has driven the complete driving cycle.
- 3.2. Separate values of Q shall be logged over the Part One and Part Two of the cycle.

Annex 9

METHOD OF MEASURING THE ELECTRIC RANGE OF VEHICLES POWERED BY AN ELECTRIC POWER TRAIN ONLY OR BY A HYBRID ELECTRIC POWER TRAIN AND THE OVC RANGE OF VEHICLES POWERED BY A HYBRID ELECTRIC POWERTRAIN

1. MEASUREMENT OF THE ELECTRIC RANGE

The test method described hereafter permits to measure the electric range, expressed in km, of vehicles powered by an electric power train only or the electric range and OVC range of vehicles powered by a hybrid electric power train with off-vehicle charging (OVC-HEV as defined in paragraph 2. of Annex 8).

2. PARAMETERS, UNITS AND ACCURACY OF MEASUREMENTS

Parameters, units and accuracy of measurements shall be as follows:

Parameter	Unit	Accuracy	Resolution
Time	s	+/- 0.1 s	0.1 s
Distance	m	+/- 0.1 per cent	1 m
Temperature degrees	C	+/- 1 degree C	1 degree C
Speed	km/h	+/- 1 per cent	0.2 km/h
Mass	kg	+/- 0.5 per cent	1 kg
Electricity balance	Ah	+/- 0.5 per cent	0.3 per cent

3. TEST CONDITIONS

3.1. Condition of the vehicle

3.1.1. The vehicle tyres shall be inflated to the pressure specified by the vehicle manufacturer when the tyres are at the ambient temperature.

3.1.2. The viscosity of the oils for the mechanical moving parts shall conform to the specifications of the vehicle manufacturer.

3.1.3. The lighting and light-signalling and auxiliary devices shall be off, except those required for testing and usual daytime operation of the vehicle.

3.1.4. All energy storage systems available for other than traction purposes (electric, hydraulic, pneumatic, etc.) shall be charged up to their maximum level specified by the manufacturer.

3.1.5. If the batteries are operated above the ambient temperature, the operator shall follow the procedure recommended by the vehicle manufacturer in order to keep

the temperature of the battery in the normal operating range.

The manufacturer's agent shall be in a position to attest that the thermal management system of the battery is neither disabled nor reduced.

3.1.6. The vehicle must have undergone at least 300 km during the seven days before the test with those batteries that are installed in the test vehicle.

3.2. Climatic conditions

For testing performed outdoors, the ambient temperature shall be between 5 °C and 32 °C.

The indoors testing shall be performed at a temperature between 20 °C and 30 °C.

4. OPERATION MODES

The test method includes the following steps:

- (a) Initial charge of the battery;
- (b) Application of the cycle and measurement of the electric range.

Between the steps, if the vehicle shall move, it is pushed to the following test area (without regenerative recharging).

4.1. Initial charge of the battery

Charging the battery consists of the following procedures:

Note: "Initial charge of the battery" applies to the first charge of the battery, at the reception of the vehicle. In case of several combined tests or measurements, carried out consecutively, the first charge carried out shall be an "initial charge of the battery" and the following may be done in accordance with the "normal overnight charge" procedure.

4.1.1. Discharge of the battery

4.1.1.1. For pure electric vehicles:

4.1.1.1.1. The procedure starts with the discharge of the battery of the vehicle while driving (on the test track, on a chassis dynamometer, etc.) at a steady speed of 70 per cent +/-5 percent from the maximum thirty minutes speed of the vehicle.

4.1.1.1.2. Stopping the discharge occurs:

- (a) When the vehicle is not able to run at 65 per cent of the maximum thirty minutes speed;

- (b) Or when an indication to stop the vehicle is given to the driver by the standard onboard instrumentation; or
- (c) After covering the distance of 100 km.

4.1.1.2. For externally chargeable hybrid electric vehicle (OVC HEV) without an operating mode switch as defined in Annex 8:

4.1.1.2.1. The manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric operating state.

4.1.1.2.2. The procedure shall start with the discharge of the electrical energy/power storage device of the vehicle while driving (on the test track, on a chassis dynamometer, etc.):

- (a) At a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up;
- (b) Or, if a vehicle cannot reach a steady speed of 50 km/h without starting up the fuel consuming engine, the speed shall be reduced until the vehicle can run at a lower steady speed where the fuel consuming engine just does not start up for a defined time/distance (to be specified between technical service and manufacturer);
- (c) Or with manufacturers' recommendation.

The fuel consuming engine shall be stopped within ten seconds of it being automatically started.

4.1.1.3. For externally chargeable hybrid electric vehicle (OVC HEV) with an operating mode switch as defined in Annex 8:

4.1.1.3.1. If there is not a pure electric position, the manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric operating state.

4.1.1.3.2. The procedure shall start with the discharge of the electrical energy/power storage device of the vehicle while driving with the switch in pure electric position (on the test track, on a chassis dynamometer, etc.) at a steady speed of 70 per cent +/-5 per cent of the maximum thirty minutes speed of the vehicle.

4.1.1.3.3. Stopping the discharge occurs:

- (a) When the vehicle is not able to run at 65 per cent of the maximum thirty minutes speed; or
- (b) When an indication to stop the vehicle is given to the driver by the standard

onboard instrumentation; or

(c) After covering the distance of 100 km.

4.1.1.3.4. If the vehicle is not equipped with a pure electric operating state, the electrical energy/ power storage device discharge shall be achieved by driving the vehicle (on the test track, on a chassis dynamometer, etc.):

- (a) At a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up; or
- (b) If a vehicle can not reach a steady speed of 50 km/h without starting up the fuel consuming engine, the speed shall be reduced until the vehicle can run a lower steady speed where the fuel consuming engine just does not start up for a defined time/distance (to be specified between technical service and manufacturer); or
- (c) with manufacturers' recommendation.

The fuel consuming engine shall be stopped within ten seconds of it being automatically started.

4.1.2. Application of a normal overnight charge

For a pure electric vehicle, the battery shall be charged according to the normal overnight charge procedure, as defined in paragraph 2.4.1.2. of Annex 7, for a period not exceeding twelve hours.

For an OVC HEV, the battery shall be charged according to the normal overnight charge procedure as described in paragraph 3.2.2.5. of Annex 8.

4.2. Application of the cycle and measurement of the range

4.2.1. For pure electric vehicle:

4.2.1.1. The test sequence as defined in paragraph 1.1. of Annex 7 is applied on a chassis dynamometer adjusted as described in Appendix 1 of Annex 7, until the end of the test criteria is reached.

4.2.1.2. The end of the test criteria is reached when the vehicle is not able to meet the target curve up to 50 km/h, or when an indication from the standard on-board instrumentation is given to the driver to stop the vehicle.

Then the vehicle shall be slowed down to 5 km/h by releasing the accelerator pedal, without touching the brake pedal and then stopped by braking.

4.2.1.3. At a speed over 50 km/h, when the vehicle does not reach the required acceleration



or speed of the test cycle, the accelerator pedal shall remain fully depressed until the reference curve has been reached again.

- 4.2.1.4. To respect human needs, up to three interruptions are permitted between test sequences, of no more than fifteen minutes in total.
- 4.2.1.5. At the end, the measure  $D_e$  of the covered distance in km is the electric range of the electric vehicle. It shall be rounded to the nearest whole number.
- 4.2.2. For hybrid electric vehicles
- 4.2.2.1. To determine the electric range of a hybrid electric vehicle
- 4.2.2.1.1. The applicable test sequence and accompanying gear shift prescription, as defined in paragraph 1.4. of Annex 8, is applied on a chassis dynamometer adjusted as described in Appendices 1, 6, and 7 of Annex 4a of Regulation No. 83, until the end of the test criteria is reached.
- 4.2.2.1.2. To measure the electric range the end of the test criteria is reached when the vehicle is not able to meet the target curve up to 50 km/h, or when an indication from the standard on-board instrumentation is given to the driver to stop the vehicle or when the battery has reached its minimum state of charge. Then the vehicle shall be slowed down to 5 km/h by releasing the accelerator pedal, without touching the brake pedal and then stopped by braking.
- 4.2.2.1.3. At a speed over 50 km/h, when the vehicle does not reach the required acceleration or speed of the test cycle, the accelerator pedal shall remain fully depressed until the reference curve has been reached again.
- 4.2.2.1.4. To respect human needs, up to three interruptions are permitted between test sequences, of no more than 15 minutes in total.
- 4.2.2.1.5. At the end, the measure  $D_e$  of the distance covered using the electrical motor only in km is the electric range of the hybrid electric vehicle. It shall be rounded to the nearest whole number. Where the vehicle operates both in electric and hybrid modes during the test, the periods of electric only operation will be determined by measuring current to the injectors or ignition.
- 4.2.2.2. To determine the OVC range of a hybrid electric vehicle
- 4.2.2.2.1. The applicable test sequence and accompanying gear shift prescription, as defined in paragraph 1.4. of Annex 8, is applied on a chassis dynamometer adjusted as described in Appendices 1, 6, and 7 of Annex 4a of Regulation No. 83, until the end of the test criteria is reached.

- 4.2.2.2.2. To measure the OVC range the end of the test criteria is reached when the battery has reached its minimum state of charge according to the criteria defined in Annex 8, paragraph 3.2.3.2.2. or 4.2.4.2.2. Driving is continued until the final idling period in the extra-urban cycle.
- 4.2.2.2.3. To respect human needs, up to three interruptions are permitted between test sequences, of no more than fifteen minutes in total.
- 4.2.2.2.4. At the end, the total distance driven in km, rounded to the nearest whole number, is the OVC range of the hybrid electric vehicle.

## Annex 10

### EMISSIONS TEST PROCEDURE FOR A VEHICLE EQUIPPED WITH A PERIODICALLY REGENERATING SYSTEM

#### 1. INTRODUCTION

- 1.1. This annex defines the specific provisions regarding type approval of a vehicle equipped with a periodically regenerating system as defined in paragraph 2.19 of this Regulation.

#### 2. SCOPE AND EXTENSION OF THE TYPE APPROVAL

##### 2.1. Vehicle family groups equipped with periodically regenerating system

The procedure applies to vehicles equipped with a periodically regenerating system as defined in paragraph 2.19. of this Regulation. For the purpose of this annex vehicle family groups may be established. Accordingly, those vehicle types with regenerative systems, whose parameters described below are identical, or within the stated tolerances, shall be considered to belong to the same family with respect to measurements specific to the defined periodically regenerating systems.

##### 2.1.1. Identical parameters are:

Engine:

- (a) Number of cylinders,
- (b) Engine capacity ( $\pm 15$  per cent),
- (c) Number of valves,
- (d) Fuel system,
- (e) Combustion process (2 stroke, 4 stroke, rotary).

Periodically regenerating system (i.e. catalyst, particulate trap):

- (a) Construction (i.e. type of enclosure, type of precious metal, type of substrate, cell density),
- (b) Type and working principle,
- (c) Dosage and additive system,
- (d) Volume ( $\pm 10$  per cent),
- (e) Location (temperature  $\pm 50$  °C at 120 km/h or 5 per cent difference of maximum temperature / pressure).

2.2. Vehicle types of different reference masses

The Ki factor developed by the procedures in this annex for type approval of a vehicle type with a periodically regenerating system as defined in paragraph 2.19. of this Regulation, may be extended to other vehicles in the family group with a reference mass within the next two higher equivalent inertia classes or any lower equivalent inertia.

2.3. Instead of carrying out the test procedures defined in the following paragraph, a fixed Ki value of 1.05 may be used, if the technical service sees no reason that this value could be exceeded.

3. TEST PROCEDURE

The vehicle may be equipped with a switch capable of preventing or permitting the regeneration process provided that this operation has no effect on original engine calibration. This switch shall be permitted only for the purpose of preventing regeneration during loading of the regeneration system and during the pre-conditioning cycles. However, it shall not be used during the measurement of emissions during the regeneration phase; rather the emission test shall be carried out with the unchanged Original Equipment Manufacturer's (OEM) control unit.

3.1. Measurement of carbon dioxide emission and fuel consumption between two cycles where regenerative phases occur

3.1.1. The average of carbon dioxide emission and fuel consumption between regeneration phases and during loading of the regenerative device shall be determined from the arithmetic mean of several approximately equidistant (if more than 2) Type I operating cycles or equivalent engine test bench cycles. As an alternative, the manufacturer may provide data to show that the carbon dioxide emission and fuel consumption remain constant (+4 per cent) between regeneration phases. In this case, the carbon dioxide emission and fuel consumption measured during the regular Type I test may be used. In any other case emissions measurement for at least two Type I operating cycles or equivalent engine test bench cycles must be completed: one immediately after regeneration (before new loading) and one as close as possible prior to a regeneration phase. All emissions measurements and calculations shall be carried out according to Annex 6. Determination of average emissions for a single regenerative system shall be according to paragraph 3.3. of this annex and for multiple regeneration systems according to paragraph 3.4. of this annex.

3.1.2. The loading process and Ki determination shall be made during the Type I operating cycle, on a chassis dynamometer or on an engine test bench using an equivalent test cycle. These cycles may be run continuously (i.e. without the need to switch the engine off between cycles). After any number of completed cycles, the vehicle may be removed from the chassis dynamometer, and the test continued at a later time.

- 3.1.3. The number of cycles (D) between two cycles where regeneration phases occur, the number of cycles over which emissions measurements are made (n), and each emissions measurement (M'sij) shall be reported in Annex 1, items 4.1.11.2.1.10.1. to 4.1.11.2.1.10.4. or 4.1.11.2.5.4.1. to 4.1.11.2.5.4.4. as applicable.
- 3.2. Measurement of carbon dioxide emission and fuel consumption during regeneration
- 3.2.1. Preparation of the vehicle, if required, for the emissions test during a regeneration phase, may be completed using the preparation cycles in paragraph 6.3. of Annex 4a of Regulation No. 83 or equivalent engine test bench cycles, depending on the loading procedure chosen in paragraph 3.1.2. above.
- 3.2.2. The test and vehicle conditions for the test described in Annex 6 apply before the first valid emission test is carried out.
- 3.2.3. Regeneration must not occur during the preparation of the vehicle. This may be ensured by one of the following methods:
- 3.2.3.1. A “dummy” regenerating system or partial system may be fitted for the pre-conditioning cycles.
- 3.2.3.2. Any other method agreed between the manufacturer and the type approval authority.
- 3.2.4. A cold-start exhaust emission test including a regeneration process shall be performed according to the Type I operating cycle, or equivalent engine test bench cycle. If the emissions tests between two cycles where regeneration phases occur are carried out on an engine test bench, the emissions test including a regeneration phase shall also be carried out on an engine test bench.
- 3.2.5. If the regeneration process requires more than one operating cycle, subsequent test cycle(s) shall be driven immediately, without switching the engine off, until complete regeneration has been achieved (each cycle shall be completed). The time necessary to set up a new test should be as short as possible (e.g. particular matter filter change). The engine must be switched off during this period.
- 3.2.6. The carbon dioxide emission and fuel consumption values during regeneration (M<sub>ri</sub>) shall be calculated according to Annex 6. The number of operating cycles (d) measured for complete regeneration shall be recorded.

3.3. Calculation of the combined carbon dioxide emission and fuel consumption of a single regenerative system

$$(1) \quad M_{si} = \frac{\sum_{j=1}^n M'_{sij}}{n} \quad n \geq 2$$

$$(2) \quad M_{ri} = \frac{\sum_{j=1}^d M'_{rij}}{d}$$

$$(3) \quad M_{pi} = \left\{ \frac{M_{si} \cdot D + M_{ri} \cdot d}{D + d} \right\}$$

where for each carbon dioxide emission and fuel consumption considered:

$M'_{sij}$  = mass emissions of CO<sub>2</sub> in g/km and fuel consumption in l/100 km over one part (i) of the operating cycle (or equivalent engine test bench cycle) without regeneration;

$M'_{rij}$  = mass emissions of CO<sub>2</sub> in g/km and fuel consumption in l/100 km over one part (i) of the operating cycle (or equivalent engine test bench cycle) during regeneration. (when  $n > 1$ , the first Type I test is run cold, and subsequent cycles are hot);

$M_{si}$  = mean mass emissions of CO<sub>2</sub> in g/km and fuel consumption in l/100 km over one part (i) of the operating cycle without regeneration;

$M_{ri}$  = mean mass emissions of CO<sub>2</sub> in g/km and fuel consumption in l/100 km over one part (i) of the operating cycle during regeneration;

$M_{pi}$  = mean mass emission of CO<sub>2</sub> in g/km and fuel consumption in l/100 km;

$n$  = number of test points at which emissions measurements (Type I operating cycles or equivalent engine test bench cycles) are made between two cycles where regenerative phases occur,  $\geq 2$ ;


$d$  = number of operating cycles required for regeneration;

D = number of operating cycles between two cycles where regenerative phases occur.

For an illustration of measurement parameters see figure 10/1.

Figure 10/1

Parameters measured during carbon dioxide emission and fuel consumption test during and between cycles where regeneration occurs (schematic example, the emissions during 'D' may increase or decrease)

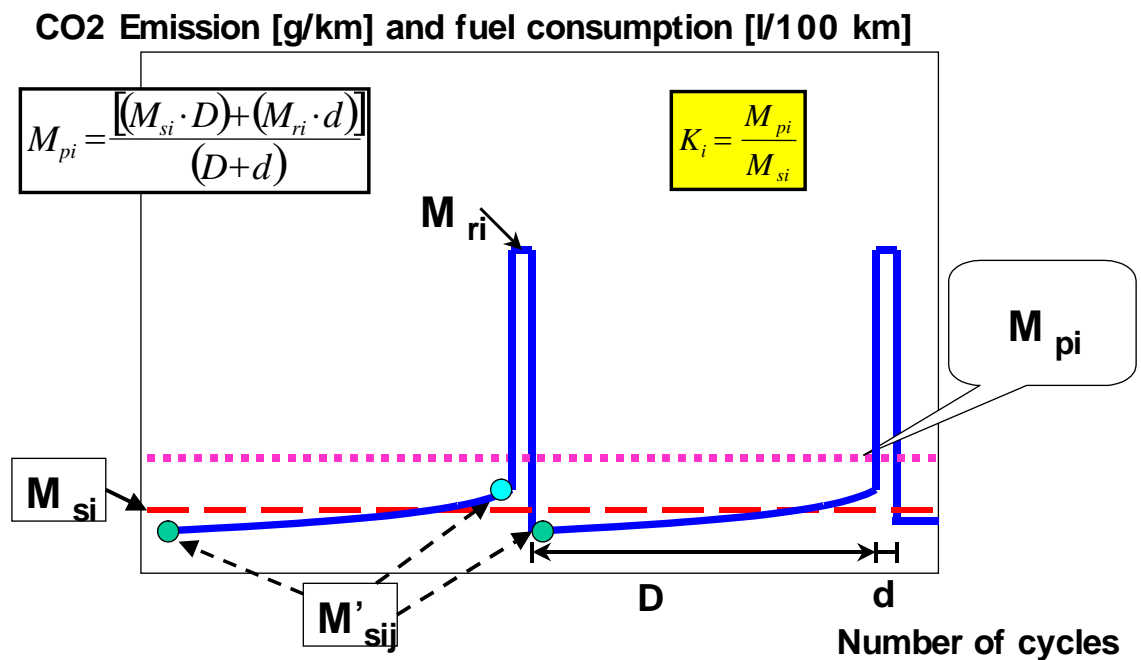

3.3.1. Calculation of the regeneration factor K for carbon dioxide emission and fuel consumption (i) considered

$$K_i = M_{pi} / M_{si}$$

M<sub>si</sub>, M<sub>pi</sub> and K<sub>i</sub> results shall be recorded in the test report delivered by the Technical Service.

K<sub>i</sub> may be determined following the completion of a single sequence.

3.4. Calculation of combined CO<sub>2</sub>-emission and fuel consumption of multiple periodic regenerating systems

$$(1) \quad M_{sik} = \frac{\sum_{k=1}^{n_k} M'_{sik,j}}{n_k} \quad n_k \geq 2$$

$$(2) \quad M_{rik} = \frac{\sum_{k=1}^{d_k} M'_{rik,j}}{d_k}$$

$$(3) \quad M_{si} = \frac{\sum_{k=1}^x M_{sik} \cdot D_k}{\sum_{k=1}^x D_k}$$

$$(4) \quad M_{ri} = \frac{\sum_{k=1}^x M_{rik} \cdot d_k}{\sum_{k=1}^x d_k}$$

$$(5) \quad M_{pi} = \frac{M_{si} \cdot \sum_{k=1}^x D_k + M_{ri} \cdot \sum_{k=1}^x d_k}{\sum_{k=1}^x (D_k + d_k)}$$

$$(6) \quad M_{pi} = \frac{\sum_{k=1}^x (M_{sik} \cdot D_k + M_{rik} \cdot d_k)}{\sum_{k=1}^x (D_k + d_k)}$$

$$(7) \quad K_i = \frac{M_{pi}}{M_{si}}$$

where:

$M_{si}$  = mass emission of all events k of CO<sub>2</sub> in g/km and fuel consumption in l/100 km (i) without regeneration;

$M_{ri}$  = mass emission of all events k of CO<sub>2</sub> in g/km and fuel consumption in l/100 km (i) during regeneration;




- $M_{pi}$  = mass emission of all events k of CO<sub>2</sub> in g/km and fuel consumption in l/100 km (i);
- $M_{sik}$  = mass emission of event k of CO<sub>2</sub> in g/km and fuel consumption in l/100 km (i) without regeneration;
- $M_{rik}$  = mass emission of event k of CO<sub>2</sub> in g/km and fuel consumption in l/100 km (i) during regeneration;
- $M'_{sik,j}$  = mass emission of event k of CO<sub>2</sub> in g/km and fuel consumption in l/100 km (i) over one Type I operating cycle (or equivalent engine test bench cycle) without regeneration measured at point j;  $1 \leq j \leq n$ ;
- $M'_{rik,j}$  = mass emission of event k of CO<sub>2</sub> in g/km and fuel consumption in l/100 km (i) over one Type I operating cycle (or equivalent engine test bench cycle) during regeneration (when  $j > 1$ , the first Type I test is run cold, and subsequent cycles are hot) measured at operating cycle j;  $1 \leq j \leq d$ ;
- $n_k$  = number of test points of event k at which emissions measurements (Type I operating cycles or equivalent engine test bench cycles) are made between two cycles where regenerative phases occur,  $\geq$ ;
- $d_k$  = number of operating cycles of event k required for regeneration;
- $D_k$  = number of operating cycles of event k between two cycles where regenerative phases occur.


For an illustration of measurement parameters see Figure 10/2 (below)

Figures 10/2 and 10/3

Parameters measured during emissions test during and between cycles where regeneration occurs (schematic example)

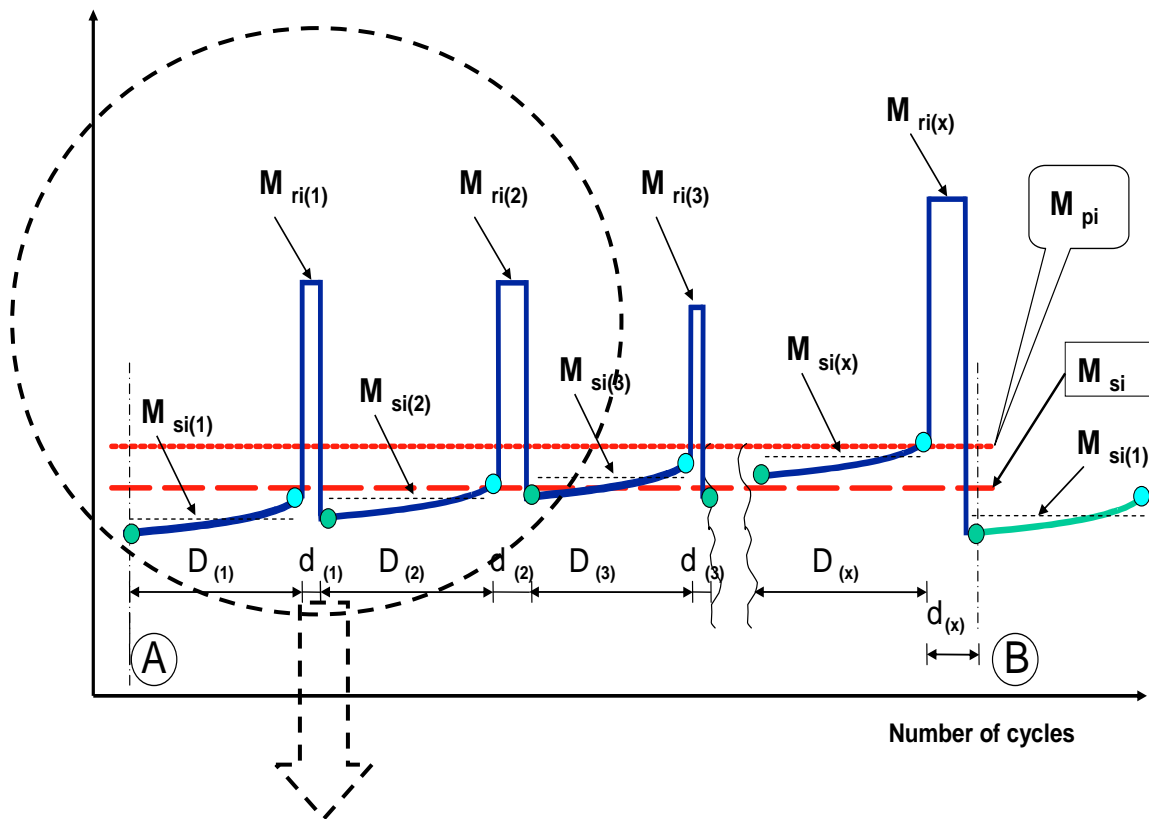

For more details of the schematic process see Figure 10/3

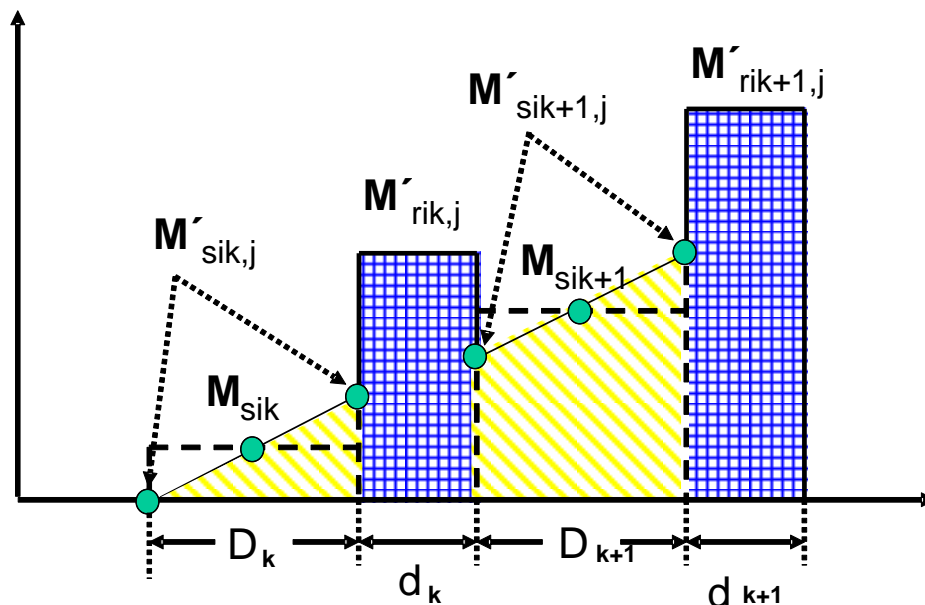

For application of a simple and realistic case, the following description gives a detailed explanation of the schematic example shown in Figure 10/3 above):

1. DPF: regenerative, equidistant events, similar emissions ( $\pm 15$  per cent) from event to event

$$D_k = D_{k+1} = D_1$$

$$d_k = d_{k+1} = d_1$$

$$M_{rik} - M_{sik} = M_{rik+1} - M_{sik+1}$$

$$n_k = n$$

2. DeNOx: the desulphurisation (SO<sub>2</sub> removal) event is initiated before an influence of sulphur on emissions is detectable ( $\pm 15$  per cent of measured emissions) and in this example for exothermic reason together with the last DPF regeneration event performed.

$$M'_{sik,j=1} = \text{constant} \rightarrow M_{sik} = M_{sik+1} = M_{si2}$$

$$M_{rik} = M_{rik+1} = M_{ri2}$$

For SO<sub>2</sub> removal event:

$$M_{ri2}, M_{si2}, d_2, D_2, n_2 = 1$$

3. Complete\_system (DPF + DeNOx):

$$M_{si} = \frac{n \cdot M_{si1} \cdot D_1 + M_{si2} \cdot D_2}{n \cdot D_1 + D_2}$$

$$M_{ri} = \frac{n \cdot M_{ri1} \cdot d_1 + M_{ri2} \cdot d_2}{n \cdot d_1 + d_2}$$

$$M_{pi} = \frac{M_{si} + M_{ri}}{n \cdot (D_1 + d_1) + D_2 + d_2} = \frac{n \cdot (M_{si1} \cdot D_1 + M_{ri1} \cdot d_1) + M_{si2} \cdot D_2 + M_{ri2} \cdot d_2}{n \cdot (D_1 + d_1) + D_2 + d_2}$$

The calculation of the factor (K<sub>i</sub>) for multiple periodic regenerating systems is only possible after a certain number of regeneration phases for each system. After performing the complete procedure (A to B, see Figure 10/2), the original starting conditions A should be reached again.

- 3.4.1. Extension of approval for a multiple periodic regeneration system

- 3.4.1.1. If the technical parameter(s) and or the regeneration strategy of a multiple regeneration system for all events within this combined system are changed, the complete procedure including all regenerative devices should be performed by measurements to update the multiple K<sub>i</sub> factor.

- 3.4.1.2. If a single device of the multiple regeneration system changed only in strategy parameters (i.e. such as “D” and/or “d” for DPF) and the manufacturer could present technical feasible data and information to the Technical Service that:
- (a) There is no detectable interaction with the other device(s) of the system, and
  - (b) The important parameters (i.e. construction, working principle, volume, location etc.) are identical,

the necessary update procedure for  $K_i$  could be simplified.

As agreed between the manufacturer and the Technical Service in such a case only a single event of sampling/storage and regeneration should be performed and the test results (“ $M_{si}$ ”, “ $M_{ri}$ ”) in combination with the changed parameters (“D” and/or “d”) could be introduced in the relevant formula(s) to update the multiple  $K_i$  factor in a mathematical way under substitution of the existing basis  $K_i$  factor formula(s).”

-----